



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1470

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECint_rate_base2006 = 1310

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

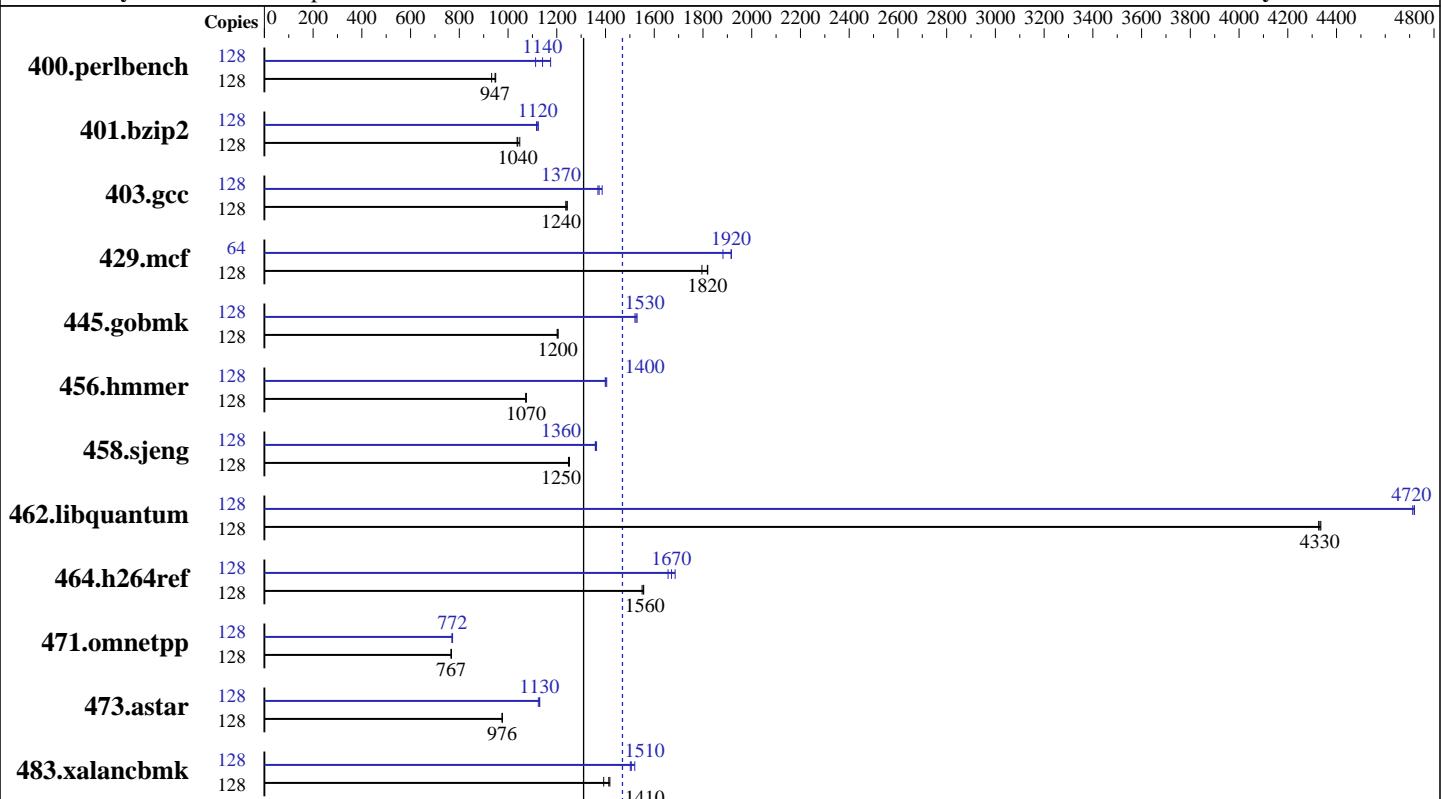

SPECint_rate_base2006 = 1310

SPECint_rate2006 = 1470

Hardware

CPU Name: POWER7
 CPU Characteristics: TurboCore mode
 CPU MHz: 4140
 FPU: Integrated
 CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 4 threads/core
 CPU(s) orderable: 8,16,24,32,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: 16 MB I+D on chip per chip
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz
 Disk Subsystem: 6x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64
 Compiler: IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-1
 -MicroQuill SmartHeap 9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1470

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECint_rate_base2006 = 1310

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1317	949	1321	947	1341	933	128	1124	1110	1065	1170	1095	1140
401.bzip2	128	1191	1040	1178	1050	1188	1040	128	1101	1120	1106	1120	1099	1120
403.gcc	128	832	1240	833	1240	829	1240	128	753	1370	750	1370	743	1390
429.mcf	128	642	1820	642	1820	650	1800	64	305	1920	310	1880	305	1920
445.gobmk	128	1118	1200	1114	1210	1115	1200	128	878	1530	880	1530	883	1520
456.hammer	128	1112	1070	1113	1070	1111	1080	128	854	1400	852	1400	850	1400
458.sjeng	128	1241	1250	1237	1250	1239	1250	128	1140	1360	1140	1360	1136	1360
462.libquantum	128	613	4330	612	4330	612	4340	128	563	4710	562	4720	562	4720
464.h264ref	128	1827	1550	1822	1560	1820	1560	128	1695	1670	1710	1660	1680	1690
471.omnetpp	128	1043	767	1044	766	1043	767	128	1036	772	1040	769	1036	772
473.astar	128	920	976	920	976	921	976	128	796	1130	799	1120	795	1130
483.xalancbmk	128	634	1390	625	1410	623	1420	128	586	1510	588	1500	581	1520

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Benchmarks bound to a processor using numactl on the submit command.

Operating System Notes

ulimit -s (stack) set to 1048576.

Large pages reserved as follows by root user:

echo 7040 > /proc/sys/vm/nr_hugepages

System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.

export HUGETLB_VERBOSE=0

export HUGETLB_MORECORE=yes

export XLRTEOPTS=intrinthds=1

General Notes

IBM Post-Link Optimization tool with

options "-O4 -omullX -see 0 -m power6" used for

400.perlbench 401.bzip2 403.gcc 456.hammer 458.sjeng

483.xalancbmk

options "-bf -dp -hr -las -pca -RC -RD -rmte -si -tlo -A 64 -isf 104 -lu 8 -rt 0.16
-hrf 0.18 -ihf 40 -sdp 6 -sdpm 128 -shci 65 -si -sidf 45 -omullX" used for
429.mcf

options "-q -O3 -A 32 -omullX" used for

445.gobmk

options "-bf -dp -lro -nop -RC -RD -tb -tlo -vro -A 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1470

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECint_rate_base2006 = 1310

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

General Notes (Continued)

```
-isf 88 -lu 8 -hrf 0.10 -sdp 4 -lun 27 -omullX" used for  
462.libquantum  
options "-O4 -omullX -see 1" used for  
473.astar  
options "-O4" used for  
464.h264ref  
Whenever option "-omullX" was used during the optimization phase,  
option "-imullX" was also used during the instrumentation phase.
```

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlc
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC  
462.libquantum: -DSPEC_CPU_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-O5 -qalias=noansi -qalloc -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qrtti -lsmartheap
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads
```

C++ benchmarks:

```
-qipa=noobject -qipa=threads
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1470

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECint_rate_base2006 = 1310

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC

462.libquantum: -DSPEC_CPU_LINUX

464.h264ref: -qchars=signed

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalias=noansi
-lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto
-qtune=auto -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalloca
-lhugetlbfs

429.mcf: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lhugetlbfs

456.hmmer: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

458.sjeng: -Wl,-q -O5 -lhugetlbfs

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-q64 -lhugetlbfs

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1470

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECint_rate_base2006 = 1310

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

483.xalancbmk: -Wl,-q -O5 -lsmartheap

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:30:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.