



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 1310

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECfp_rate_base2006 = 1160

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

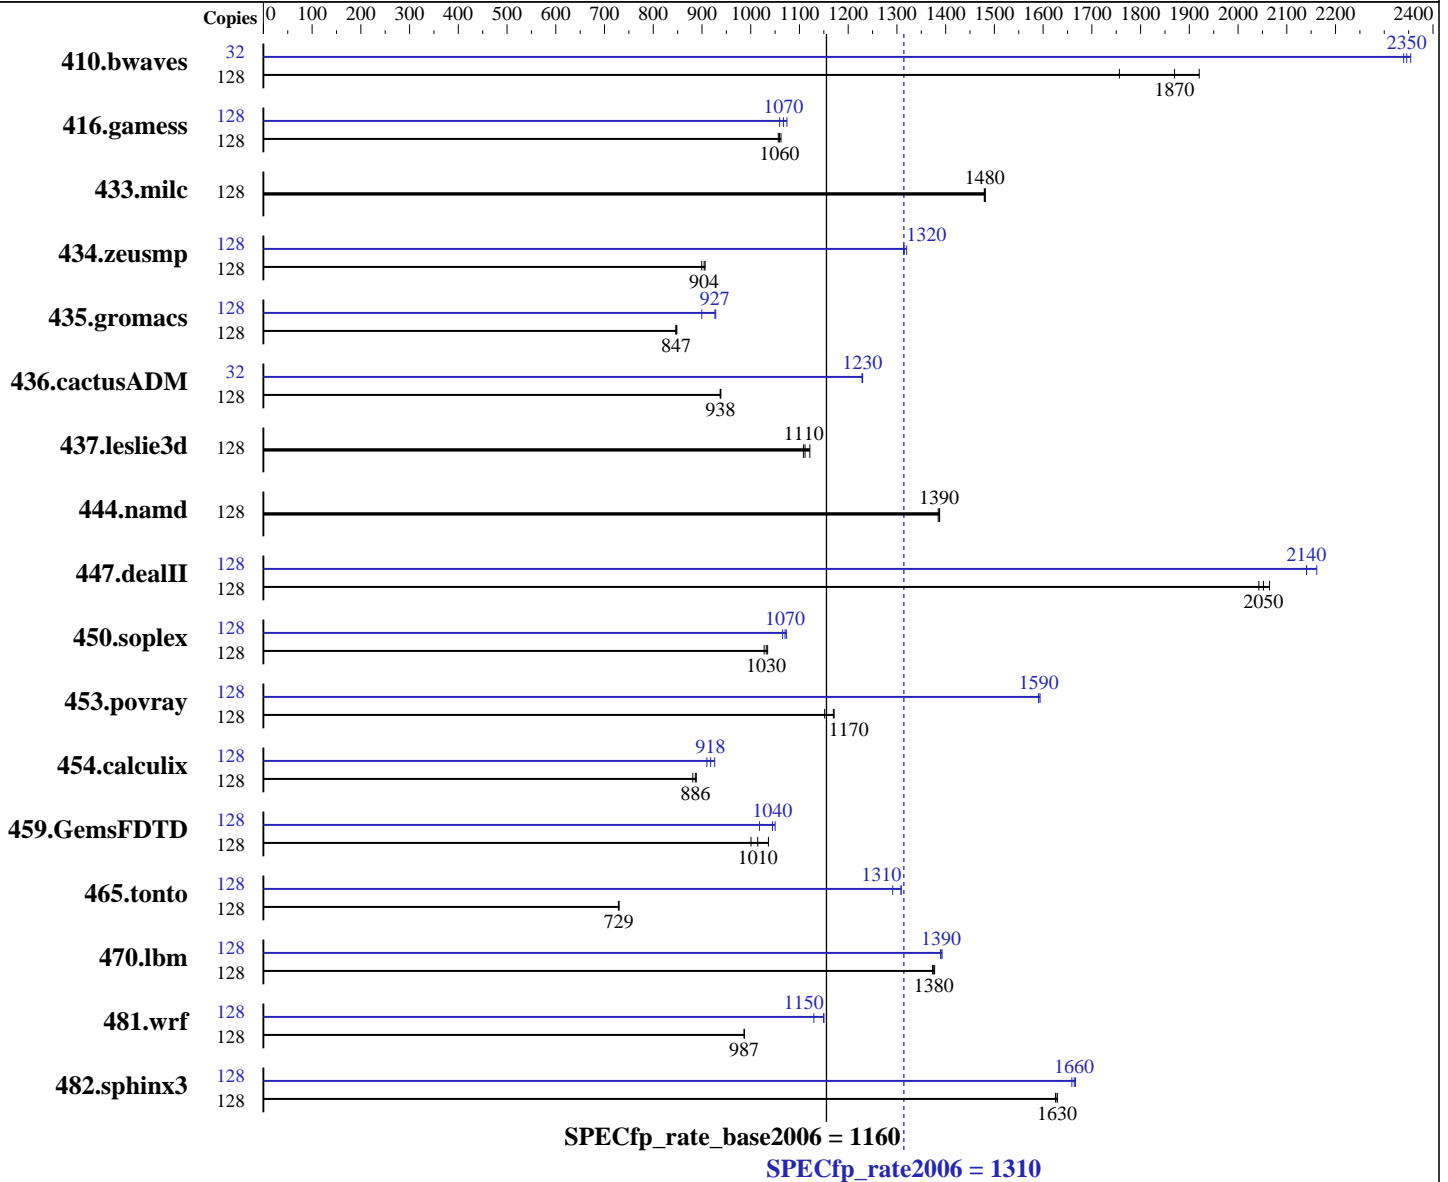

Hardware

CPU Name: POWER7
 CPU Characteristics: TurboCore mode
 CPU MHz: 4140
 FPU: Integrated
 CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 4 threads/core
 CPU(s) orderable: 8,16,24,32,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64
 Compiler: IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF
 IBM XL Fortran for Linux, V12.1 Updated with the Oct2009 PTF
 Auto Parallel: No
 File System: ext3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1310

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECfp_rate_base2006 = 1160

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per core
Other Cache: 16 MB I+D on chip per chip
Memory: 512 GB (64x8 GB) DDR3 1066 MHz
Disk Subsystem: 6x146.8 GB SAS SFF 15K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-1
-MicroQuill SmartHeap 9

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	906	1920	990	1760	930	1870	32	185	2350	186	2340	185	2350
416.gamess	128	2367	1060	2360	1060	2372	1060	128	2366	1060	2333	1070	2349	1070
433.milc	128	794	1480	794	1480	793	1480	128	794	1480	794	1480	793	1480
434.zeusmp	128	1288	904	1285	906	1295	899	128	886	1320	887	1310	882	1320
435.gromacs	128	1077	848	1079	847	1080	846	128	986	927	985	928	1016	900
436.cactusADM	128	1632	937	1631	938	1629	939	32	311	1230	311	1230	311	1230
437.leslie3d	128	1073	1120	1083	1110	1086	1110	128	1073	1120	1083	1110	1086	1110
444.namd	128	740	1390	741	1380	740	1390	128	740	1390	741	1380	740	1390
447.dealII	128	709	2060	714	2050	717	2040	128	677	2160	684	2140	684	2140
450.soplex	128	1039	1030	1035	1030	1032	1030	128	997	1070	1002	1070	995	1070
453.povray	128	581	1170	591	1150	582	1170	128	428	1590	428	1590	427	1590
454.calculix	128	1189	888	1199	881	1191	886	128	1151	918	1160	910	1140	926
459.GemsFDTD	128	1357	1000	1339	1010	1310	1040	128	1300	1040	1334	1020	1293	1050
465.tonto	128	1727	729	1729	729	1726	730	128	975	1290	962	1310	963	1310
470.lbm	128	1277	1380	1281	1370	1279	1380	128	1263	1390	1266	1390	1265	1390
481.wrf	128	1449	986	1448	987	1449	987	128	1243	1150	1244	1150	1266	1130
482.sphinx3	128	1531	1630	1532	1630	1535	1630	128	1504	1660	1497	1670	1499	1660

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
Benchmarks bound to a processor using numactl on the submit command.

Operating System Notes

```
ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
echo 8448 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export XLFRTLOPTS=intrinthds=1
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1310

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECfp_rate_base2006 = 1160

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

General Notes

IBM Post-Link optimization tool with
 options "-O4 -omullX -see 0 -m power6" used for
 433.milc 435.gromacs 436.cactusADM 482.sphinx3
 options "-O4 -omullX -see 1" used for
 436.cactusADM
 options "-O4 -omullX -see 1 -ihf -1" used for
 453.povray
 options "-O4" used for
 465.tonto
 Whenever option "-omullX" was used during the optimization phase,
 option "-imullX" was also used during the instrumentation phase.

Base Compiler Invocation

C benchmarks:
 xlc -qlanglvl=extc99

C++ benchmarks:
 xlc

Fortran benchmarks:
 xlf95

Benchmarks using both Fortran and C:
 xlc -qlanglvl=extc99 xlf95

Base Portability Flags

410.bwaves: -qfixed
 416.gamess: -qfixed
 434.zeusmp: -qfixed
 435.gromacs: -qfixed -qextname
 436.cactusADM: -qfixed -qextname
 437.leslie3d: -qfixed
 454.calculix: -qfixed -qextname
 481.wrf: -DNOUNDERSCORE
 482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:
 -O5 -qnoenablevmx -lhugetlbf

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1310

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECfp_rate_base2006 = 1160

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Base Optimization Flags (Continued)

C++ benchmarks:

-O5 -qrtti -qnoenablevmx -qstaticlink
-Wl,--whole-archive /usr/lib/libhugetlbfs.a -Wl,--no-whole-archive

Fortran benchmarks:

-O5 -qsmallstack=dynlenonheap -qalias=nostd -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

-O5 -qnoenablevmx -qsmallstack=dynlenonheap -qalias=nostd
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC

Fortran benchmarks:

xlF95

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 xlf95

Peak Portability Flags

410.bwaves: -qfixed

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1310

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECfp_rate_base2006 = 1160

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Portability Flags (Continued)

```

416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
-q64

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

```

C++ benchmarks:

```

444.namd: basepeak = yes

447.dealIII: -O5 -qrtti -qnoenablevmx -qstaticlink -Wl,-z,muldefs
-Wl,--whole-archive /usr/lib/libsmartheap.a
-Wl,--no-whole-archive

450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qstrict -lhugetlbfs

453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap

```

Fortran benchmarks:

```

410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-qnoenablevmx

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-link=BDT

437.leslie3d: basepeak = yes

459.GemsFDTD: -O5 -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
-q64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1310

IBM Power 780 (4.14 GHz, 32 core, SLES)

SPECfp_rate_base2006 = 1160

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

465.tonto: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
-lsmartheap64

Benchmarks using both Fortran and C:

435.gromacs: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

436.cactusADM: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=auto
-qtune=auto -qnostrict -lhugetlbfs

454.calculix: -O4 -B/usr/share/libhugetlbfs/ -tl -Wl, --hugetlbfs-link=BDT

481.wrf: -O5 -qnoenablevmx -q64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:30:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.