



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp<sup>®</sup>\_rate2006 = 434

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECfp\_rate\_base2006 = 417

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

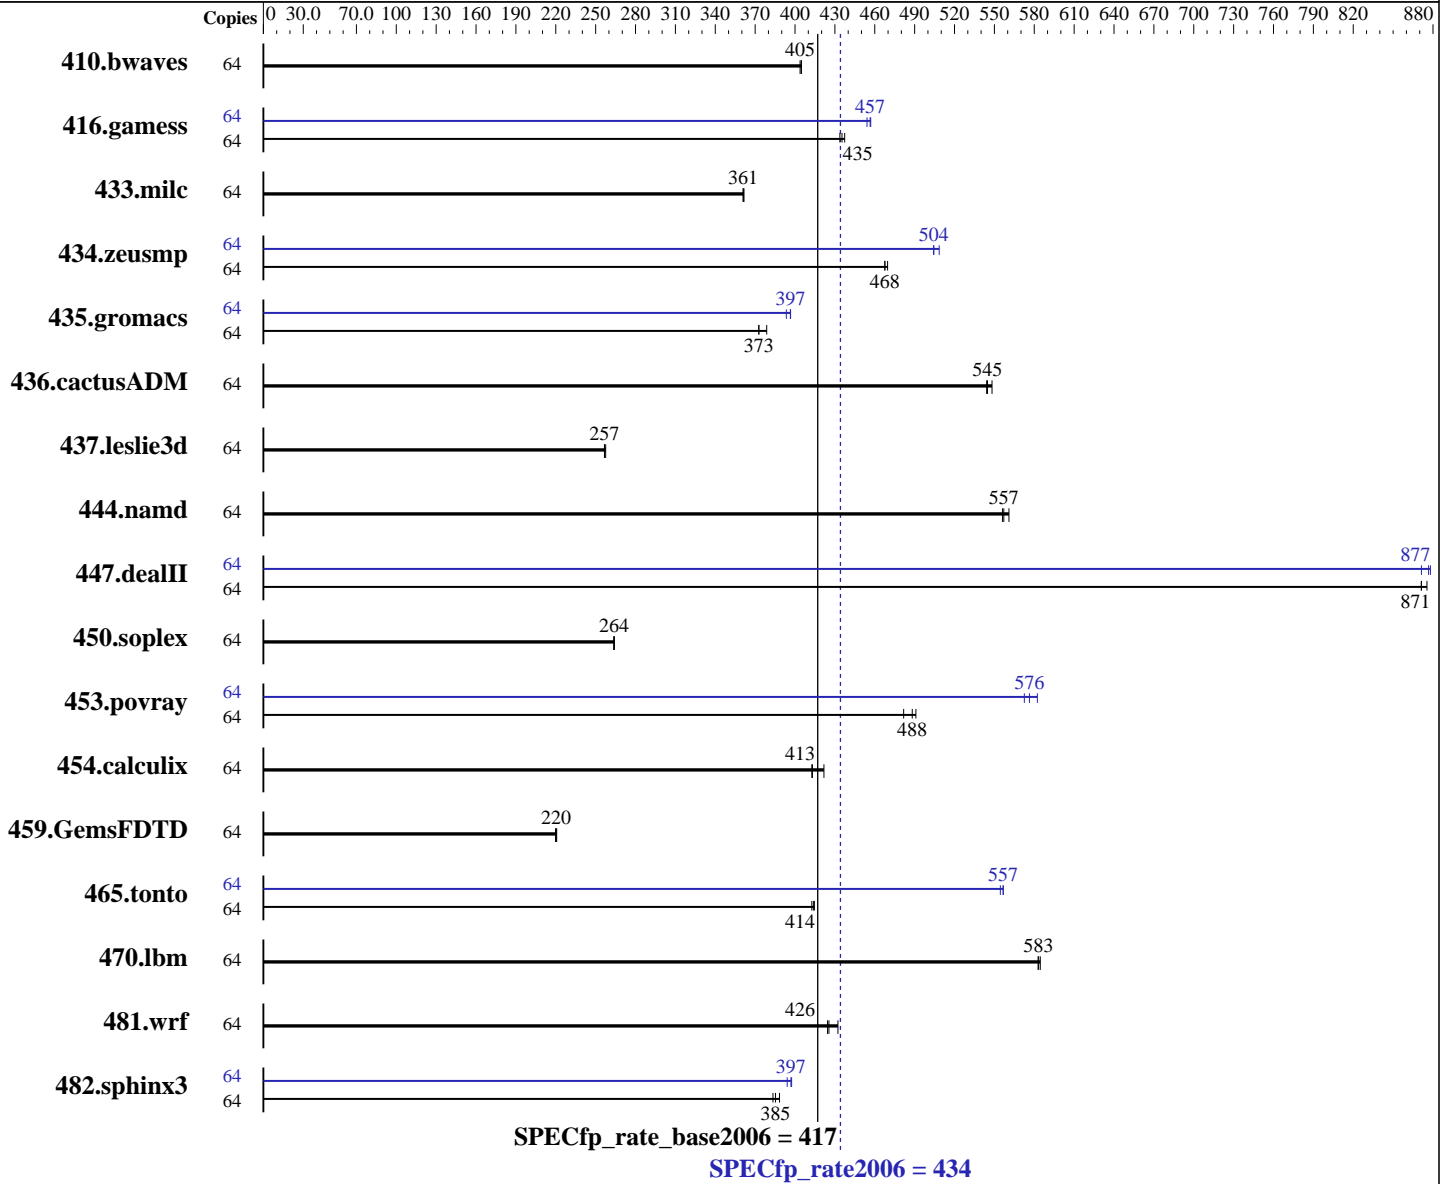

### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.30 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 16 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

### Software

Operating System: IBM AIX V6.1 with the 6100-05 Technology Level  
 Compiler: IBM XL C/C++ for AIX, V11.1  
 IBM XL Fortran for AIX, V13.1  
 Auto Parallel: No  
 File System: AIX/JFS2  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = **434**

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECfp\_rate\_base2006 = **417**

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: None  
 Memory: 128 GB (32x4 GB) DDR3 1066 MHz  
 Disk Subsystem: 1x300 GB SAS SFF 10K RPM  
 Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	2149	405	2154	404	<b>2149</b>	<b>405</b>	64	2149	405	2154	404	<b>2149</b>	<b>405</b>		
416.gamess	64	2865	437	2889	434	<b>2878</b>	<b>435</b>	64	2742	457	<b>2745</b>	<b>457</b>	2759	454		
433.milc	64	<b>1627</b>	<b>361</b>	1627	361	1625	362	64	<b>1627</b>	<b>361</b>	1627	361	1625	362		
434.zeusmp	64	1240	470	<b>1245</b>	<b>468</b>	1246	468	64	<b>1155</b>	<b>504</b>	1145	508	1155	504		
435.gromacs	64	1207	379	<b>1226</b>	<b>373</b>	1226	373	64	1152	397	<b>1152</b>	<b>397</b>	1161	393		
436.cactusADM	64	1405	544	<b>1404</b>	<b>545</b>	1395	548	64	1405	544	<b>1404</b>	<b>545</b>	1395	548		
437.leslie3d	64	<b>2343</b>	<b>257</b>	2344	257	2336	258	64	<b>2343</b>	<b>257</b>	2344	257	2336	258		
444.namd	64	923	556	<b>921</b>	<b>557</b>	915	561	64	923	556	<b>921</b>	<b>557</b>	915	561		
447.dealII	64	<b>840</b>	<b>871</b>	840	871	836	875	64	840	871	<b>835</b>	<b>877</b>	834	878		
450.soplex	64	2021	264	2025	264	<b>2022</b>	<b>264</b>	64	2021	264	2025	264	<b>2022</b>	<b>264</b>		
453.povray	64	<b>697</b>	<b>488</b>	707	482	694	491	64	<b>591</b>	<b>576</b>	585	582	595	573		
454.calculix	64	1252	422	1280	413	<b>1278</b>	<b>413</b>	64	1252	422	1280	413	<b>1278</b>	<b>413</b>		
459.GemsFDTD	64	<b>3081</b>	<b>220</b>	3090	220	3077	221	64	<b>3081</b>	<b>220</b>	3090	220	3077	221		
465.tonto	64	1519	415	<b>1522</b>	<b>414</b>	1526	413	64	<b>1132</b>	<b>557</b>	1136	554	1131	557		
470.lbm	64	<b>1508</b>	<b>583</b>	1504	585	1509	583	64	<b>1508</b>	<b>583</b>	1504	585	1509	583		
481.wrf	64	<b>1680</b>	<b>426</b>	1654	432	1684	424	64	<b>1680</b>	<b>426</b>	1654	432	1684	424		
482.sphinx3	64	<b>3237</b>	<b>385</b>	3253	383	3212	388	64	3165	394	3138	397	<b>3143</b>	<b>397</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used  
 to assign benchmark copy to specific kernel thread using  
 the "bindprocessor" command (see flags file for details).

## Operating System Notes

Environment variables set by runspec before the start of the run:  
 MALLOPTIONS = "pool"  
 MEMORY\_AFFINITY = "MCM"  
 XLFRTEOPTS = "intrinthds=1"  
 all ulimits set to unlimited.  
 4096 16M large pages defined with vmo command



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 434

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECfp\_rate\_base2006 = 417

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

## Base Compiler Invocation

C benchmarks:

/usr/vacpp/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vacpp/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

## Base Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DNOUNDERSCORE -DSPEC\_CPU\_AIX  
482.sphinx3: -qchars=signed

## Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -blpdata -D\_ILS\_MACROS

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -blpdata -D\_ILS\_MACROS  
-qrtti=all -D\_\_IBM\_FAST\_VECTOR -D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -blpdata  
-qsmallstack=dynlenonheap -qalias=nostd

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -blpdata -D\_ILS\_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 434

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECfp\_rate\_base2006 = 417

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

## Base Other Flags

C benchmarks:

-w -qsuppress=1500-036 -qipa=threads -qipa=noobject

C++ benchmarks:

-w -qsuppress=1500-036 -qipa=threads -qipa=noobject

Fortran benchmarks:

-w -qsuppress=1500-036 -qsuppress=cmpmsg -qipa=threads -qipa=noobject

Benchmarks using both Fortran and C:

-w -qsuppress=1500-036 -qipa=threads -qsuppress=cmpmsg -qipa=noobject

## Peak Compiler Invocation

C benchmarks:

/usr/vacpp/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vacpp/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

## Peak Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DNOUNDERSCORE -DSPEC\_CPU\_AIX

482.sphinx3: -qchars=signed

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 434

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECfp\_rate\_base2006 = 417

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

## Peak Optimization Flags (Continued)

470.ibm: basepeak = yes

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qlargepage  
-blpdata -D\_ILS\_MACROS -bmaxdata:0x40000000

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -O5 -D\_ILS\_MACROS -qrtti=all -blpdata -D\_\_IBM\_FAST\_VECTOR  
-D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -btextpsize:64K  
-bmaxdata:0x50000000

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D\_ILS\_MACROS  
-qalign=natural -btextpsize:64K -bmaxdata:0x50000000

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -blpdata  
-qalias=nostd -bmaxdata:0x40000000

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qlargepage -blpdata  
-qarch=auto -qenablevmx -qvecnv01 -qxlf90=nosignedzero  
-bmaxdata:0x40000000

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -blpdata  
-btextpsize:64K -bmaxdata:0x50000000

Benchmarks using both Fortran and C:

435.gromacs: -O5 -qarch=pwr6 -D\_ILS\_MACROS -bmaxdata:0x60000000

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp\_rate2006 = 434**

**IBM BladeCenter PS702 Express (3.0 GHz, 16 core)**

**SPECfp\_rate\_base2006 = 417**

**CPU2006 license:** 11

**Test date:** Mar-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2010

**Tested by:** IBM Corporation

**Software Availability:** Apr-2010

## Peak Other Flags

C benchmarks (except as noted below):

`-w -qsuppress=1500-036 -qipa=threads -qipa=noobject`

`482.sphinx3: -w -qsuppress=1500-036 -qipa=threads`

C++ benchmarks (except as noted below):

`-w -qsuppress=1500-036 -qipa=threads -qipa=noobject`

`447.dealII: -w -qsuppress=1500-036 -qipa=threads`

`453.povray: -w -qsuppress=1500-036 -qipa=threads`

Fortran benchmarks (except as noted below):

`-w -qsuppress=1500-036 -qsuppress=cmpmsg -qipa=threads -qipa=noobject`

`416.gamess: -w -qsuppress=1500-036 -qsuppress=cmpmsg -qipa=threads`

`434.zeusmp: -w -qsuppress=1500-036 -qsuppress=cmpmsg -qipa=threads`

`465.tonto: -w -qsuppress=1500-036 -qsuppress=cmpmsg -qipa=threads`

Benchmarks using both Fortran and C (except as noted below):

`-w -qsuppress=1500-036 -qipa=threads -qsuppress=cmpmsg -qipa=noobject`

`435.gromacs: -w -qsuppress=1500-036 -qipa=threads -qsuppress=cmpmsg`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

<http://www.spec.org/cpu2006/flags/IBM-XL.20100427.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

<http://www.spec.org/cpu2006/flags/IBM-XL.20100427.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:24:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.