



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5507, 2.27 GHz

SPECfp®_rate2006 = 64.2

SPECfp_rate_base2006 = 62.3

CPU2006 license: 19


Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

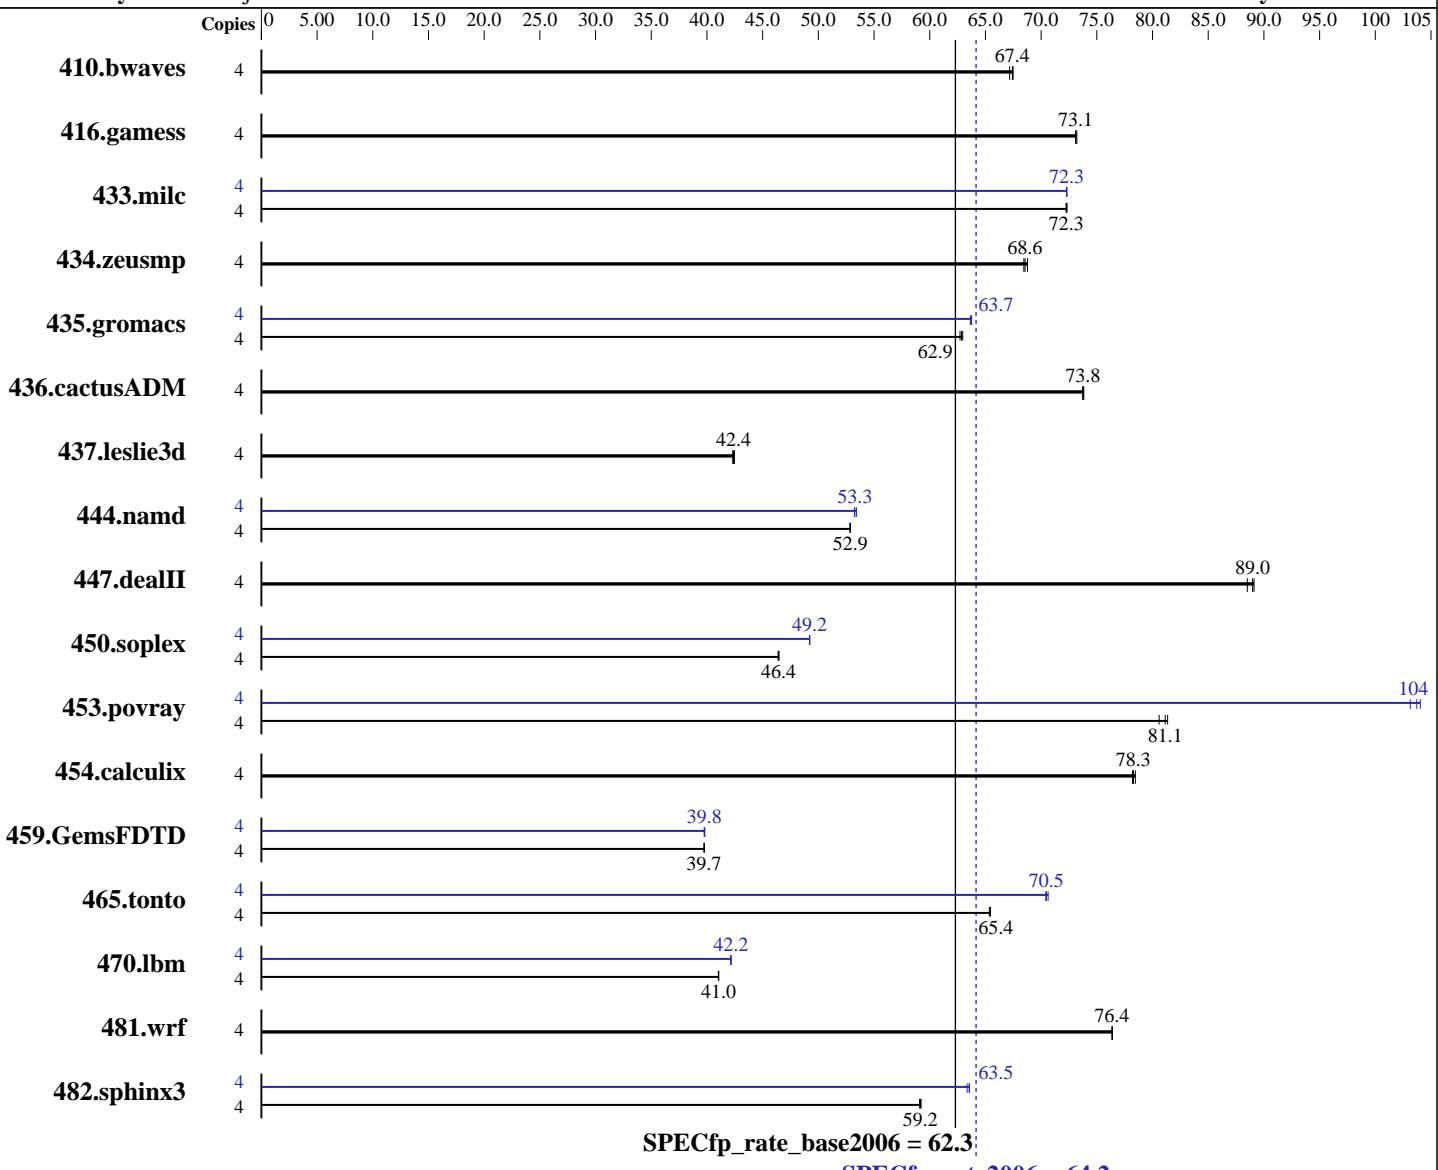

Hardware		Software	
CPU Name:	Intel Xeon E5507	Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
CPU Characteristics:		Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
CPU MHz:	2267	Auto Parallel:	No
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip	System State:	Multi-User Run Level 3
CPU(s) orderable:	1,2 chips		
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	256 KB I+D on chip per core		

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5507, 2.27 GHz

SPECfp_rate2006 = 64.2

SPECfp_rate_base2006 = 62.3

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC,
 see add'l detail in notes)
 Disk Subsystem: 1 x SSD SATA, 64 GB
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	809	67.2	806	67.5	<u>806</u>	<u>67.4</u>	4	809	67.2	806	67.5	<u>806</u>	<u>67.4</u>		
416.gamess	4	<u>1071</u>	<u>73.1</u>	1070	73.2	1071	73.1	4	<u>1071</u>	<u>73.1</u>	1070	73.2	<u>1071</u>	<u>73.1</u>		
433.milc	4	<u>508</u>	<u>72.3</u>	508	72.3	508	72.2	4	<u>508</u>	<u>72.3</u>	508	72.3	<u>508</u>	<u>72.3</u>		
434.zeusmp	4	<u>531</u>	<u>68.6</u>	529	68.8	532	68.5	4	<u>531</u>	<u>68.6</u>	529	68.8	<u>532</u>	<u>68.5</u>		
435.gromacs	4	454	63.0	455	62.7	<u>454</u>	<u>62.9</u>	4	<u>448</u>	<u>63.7</u>	449	63.6	<u>448</u>	<u>63.8</u>		
436.cactusADM	4	<u>648</u>	<u>73.8</u>	647	73.8	648	73.7	4	<u>648</u>	<u>73.8</u>	647	73.8	<u>648</u>	<u>73.7</u>		
437.leslie3d	4	885	42.5	889	42.3	<u>887</u>	<u>42.4</u>	4	885	42.5	889	42.3	<u>887</u>	<u>42.4</u>		
444.namd	4	607	52.9	<u>607</u>	<u>52.9</u>	607	52.8	4	600	53.4	<u>602</u>	<u>53.3</u>	603	<u>53.2</u>		
447.dealII	4	<u>514</u>	<u>89.0</u>	513	89.1	517	88.5	4	<u>514</u>	<u>89.0</u>	513	89.1	<u>517</u>	<u>88.5</u>		
450.soplex	4	719	46.4	718	46.5	<u>718</u>	<u>46.4</u>	4	<u>678</u>	<u>49.2</u>	678	49.2	<u>678</u>	<u>49.2</u>		
453.povray	4	262	81.4	<u>262</u>	<u>81.1</u>	264	80.6	4	<u>205</u>	<u>104</u>	205	104	<u>206</u>	<u>103</u>		
454.calculix	4	421	78.5	422	78.2	<u>422</u>	<u>78.3</u>	4	421	78.5	422	78.2	<u>422</u>	<u>78.3</u>		
459.GemsFDTD	4	1067	39.8	1068	39.7	<u>1068</u>	<u>39.7</u>	4	<u>1067</u>	<u>39.8</u>	1067	39.8	<u>1066</u>	<u>39.8</u>		
465.tonto	4	602	65.3	<u>601</u>	<u>65.4</u>	601	65.5	4	<u>558</u>	<u>70.5</u>	559	70.4	<u>557</u>	<u>70.6</u>		
470.lbm	4	1340	41.0	1339	41.1	<u>1339</u>	<u>41.0</u>	4	1304	42.1	1303	42.2	<u>1304</u>	<u>42.2</u>		
481.wrf	4	585	76.4	<u>585</u>	<u>76.4</u>	585	76.4	4	<u>585</u>	<u>76.4</u>	<u>585</u>	<u>76.4</u>	585	76.4		
482.sphinx3	4	1316	59.2	1319	59.1	<u>1318</u>	<u>59.2</u>	4	<u>1227</u>	<u>63.5</u>	1230	63.4	<u>1227</u>	<u>63.6</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5507, 2.27 GHz

SPECfp_rate2006 = 64.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5507, 2.27 GHz

SPECfp_rate2006 = 64.2

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5507, 2.27 GHz

SPECfp_rate2006 = 64.2

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

433.milc: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xsse4 .2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5507, 2.27 GHz

SPECfp_rate2006 = 64.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:29:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 May 2010.