



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp®_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016


Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

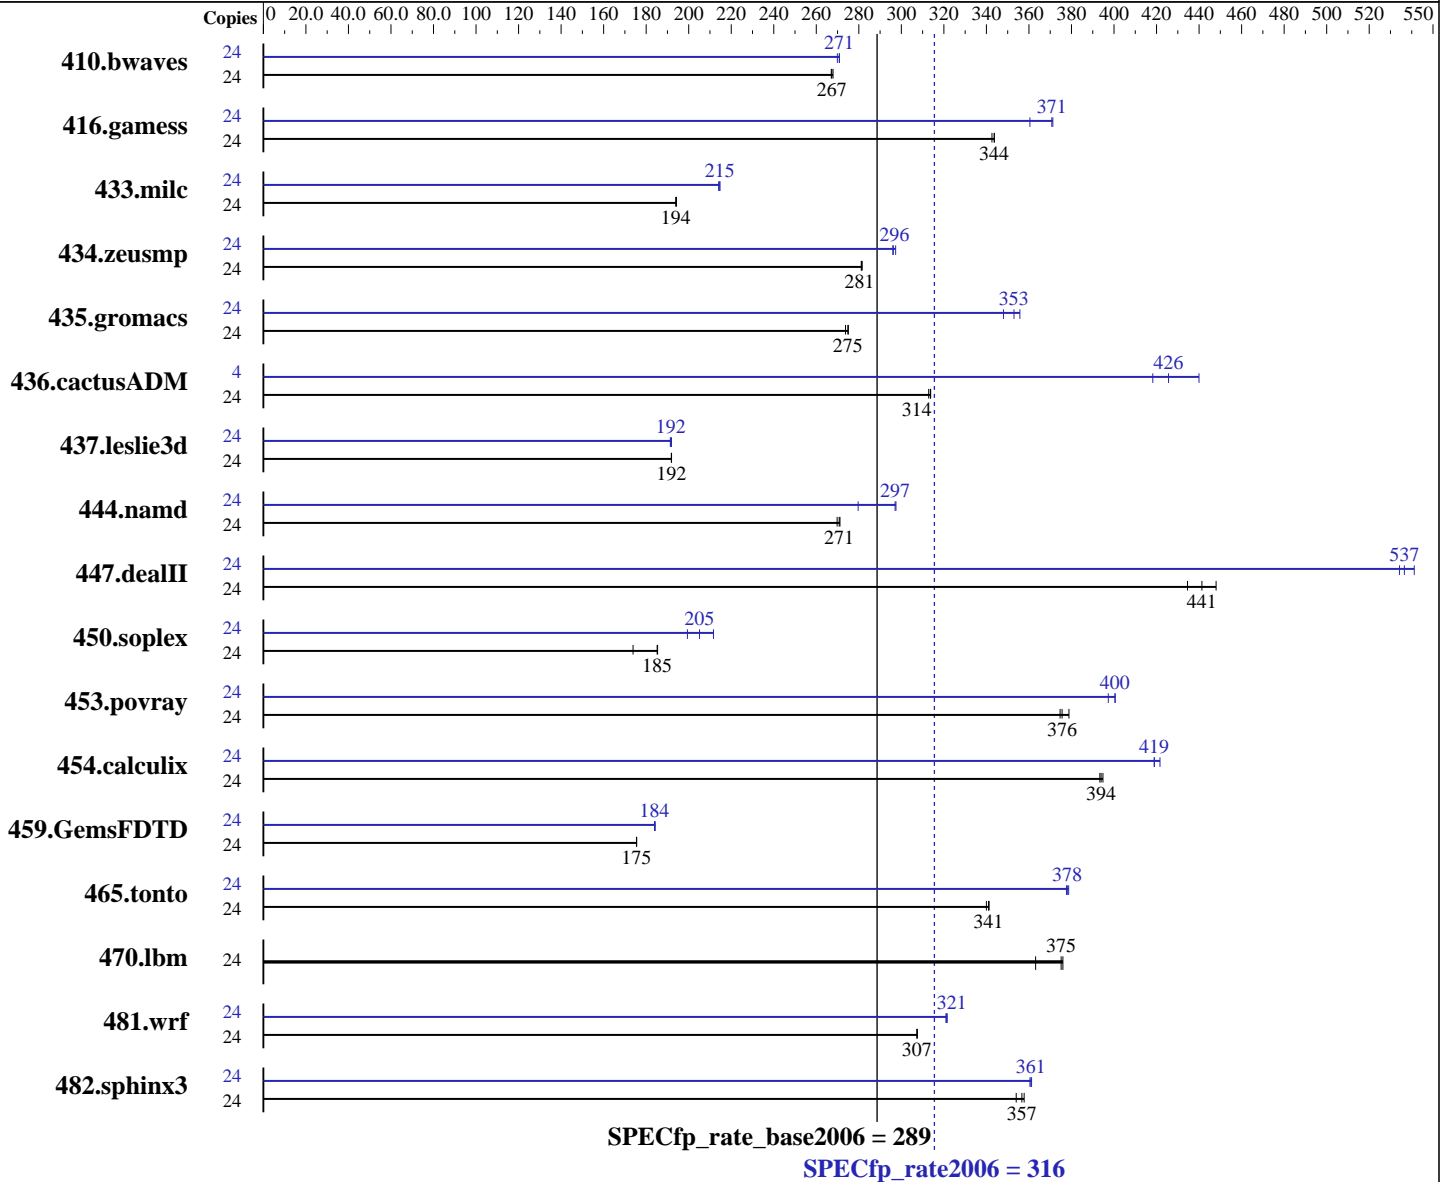

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
 Compiler: x86 Open64 4.2.3 Compiler Suite
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multiuser)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016

Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16x4 GB, PC3-10600R, CL9)
Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<u>1220</u>	<u>267</u>	1218	268	1221	267	24	1208	270	1204	271	<u>1204</u>	<u>271</u>
416.gamess	24	<u>1367</u>	<u>344</u>	1367	344	1372	343	24	<u>1268</u>	<u>371</u>	1266	371	1304	360
433.milc	24	1134	194	1136	194	<u>1136</u>	<u>194</u>	24	1026	215	<u>1027</u>	<u>215</u>	1029	214
434.zeusmp	24	<u>777</u>	<u>281</u>	776	282	777	281	24	738	296	735	297	<u>737</u>	<u>296</u>
435.gromacs	24	626	274	623	275	<u>623</u>	<u>275</u>	24	<u>485</u>	<u>353</u>	492	348	482	356
436.cactusADM	24	<u>914</u>	<u>314</u>	914	314	917	313	4	114	418	<u>112</u>	<u>426</u>	109	440
437.leslie3d	24	1176	192	<u>1176</u>	<u>192</u>	1175	192	24	<u>1177</u>	<u>192</u>	1179	191	1176	192
444.namd	24	713	270	<u>711</u>	<u>271</u>	710	271	24	688	280	<u>648</u>	<u>297</u>	647	297
447.dealII	24	<u>622</u>	<u>441</u>	613	448	632	435	24	<u>512</u>	<u>537</u>	507	541	514	534
450.soplex	24	1151	174	1080	185	<u>1081</u>	<u>185</u>	24	1004	199	<u>976</u>	<u>205</u>	946	212
453.povray	24	341	375	<u>340</u>	<u>376</u>	337	379	24	<u>319</u>	<u>400</u>	321	397	319	401
454.calculix	24	502	395	<u>503</u>	<u>394</u>	503	393	24	<u>473</u>	<u>419</u>	473	419	470	422
459.GemsFDTD	24	1450	176	<u>1451</u>	<u>175</u>	1451	175	24	1384	184	1382	184	<u>1384</u>	<u>184</u>
465.tonto	24	695	340	692	341	<u>693</u>	<u>341</u>	24	625	378	624	379	<u>625</u>	<u>378</u>
470.lbm	24	908	363	877	376	<u>879</u>	<u>375</u>	24	908	363	877	376	<u>879</u>	<u>375</u>
481.wrf	24	872	307	872	307	<u>872</u>	<u>307</u>	24	835	321	834	322	<u>834</u>	<u>321</u>
482.sphinx3	24	1321	354	<u>1311</u>	<u>357</u>	1308	358	24	1298	360	<u>1296</u>	<u>361</u>	1295	361

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016

Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

Platform Notes

SSI Server Power Supply 600W or higher
System was configured with ASPEED AST2050 VGA (on board VGA)

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-libs-revA/64:/cpu2006/amd1002mc-rate-libs-revA/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016

Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016

Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
 -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
 -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
 -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
 -CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
 -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
 -LNO:blocking=off -LNO:prefetch_ahead=5
 -LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016

Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0

-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256

-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2

-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1

-HP

465.tonto: -march=barcelona -mso -Ofast

-OPT:alias=no_f90_pointer_alias -LNO:blocking=off

-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1

-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0

-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on

-LNO:prefetch_ahead=30 -WOPT:unroll=2

-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:prefetch_ahead=10 -LANG:copyinout=off

-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow

-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.html>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 316

ASUS KGPE-D16 server motherboard
(2.2 GHz AMD Opteron 6174)

SPECfp_rate_base2006 = 289

CPU2006 license: 9016

Test date: May-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:21:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 May 2010.