



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp[®]_rate2006 = 249

BladeSymphony BS2000 (Intel Xeon X5680)

SPECfp_rate_base2006 = 243

CPU2006 license: 872


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

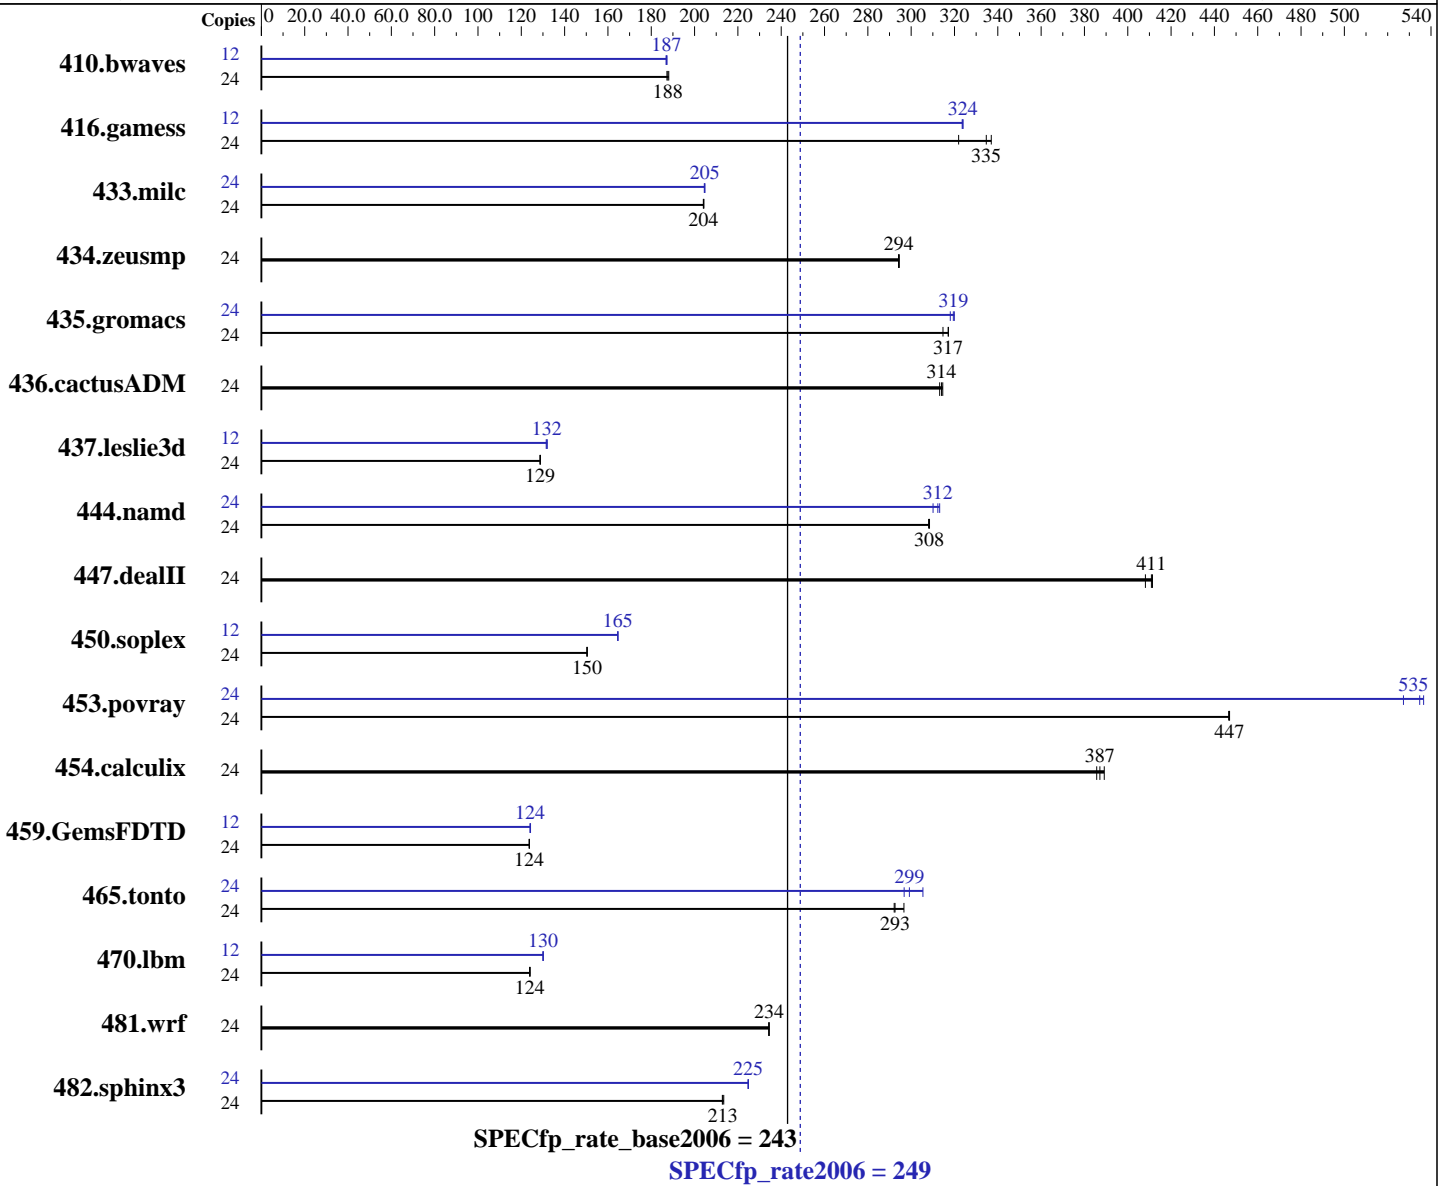

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.6 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
 Compiler: Intel C++ Compiler 11.1 for Linux Build 20091012 Package ID: l_cproc_p_11.1.059
 Intel Fortran Compiler 11.1 for Linux Build 20091012 Package ID: l_cprof_p_11.1.059
 Auto Parallel: No
 File System: ext3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 249

BladeSymphony BS2000 (Intel Xeon X5680)

SPECfp_rate_base2006 = 243

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB(6 x 8 GB PC3-10600R running at 1333 MHz, 2 rank)
Disk Subsystem: 4 x 147 GB 10000 rpm SAS
Other Hardware: None

System State: Multi-user run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1734	188	<u>1738</u>	<u>188</u>	1742	187	12	873	187	<u>872</u>	<u>187</u>	871	187		
416.gamess	24	<u>1404</u>	<u>335</u>	1394	337	1460	322	12	725	324	<u>726</u>	<u>324</u>	726	324		
433.milc	24	1078	204	<u>1079</u>	<u>204</u>	1080	204	24	1076	205	1077	204	<u>1076</u>	<u>205</u>		
434.zeusmp	24	742	294	<u>742</u>	<u>294</u>	742	294	24	742	294	<u>742</u>	<u>294</u>	742	294		
435.gromacs	24	545	315	540	317	<u>540</u>	<u>317</u>	24	539	318	<u>536</u>	<u>319</u>	536	320		
436.cactusADM	24	<u>913</u>	<u>314</u>	916	313	912	315	24	<u>913</u>	<u>314</u>	916	313	912	315		
437.leslie3d	24	<u>1752</u>	<u>129</u>	1751	129	1754	129	12	<u>856</u>	<u>132</u>	858	132	855	132		
444.namd	24	624	308	<u>624</u>	<u>308</u>	625	308	24	621	310	615	313	<u>616</u>	<u>312</u>		
447.dealII	24	673	408	<u>668</u>	<u>411</u>	667	411	24	673	408	<u>668</u>	<u>411</u>	667	411		
450.soplex	24	1332	150	1330	150	<u>1331</u>	<u>150</u>	12	<u>608</u>	<u>165</u>	608	165	608	165		
453.povray	24	286	447	286	447	<u>286</u>	<u>447</u>	24	<u>239</u>	<u>535</u>	242	527	238	537		
454.calculix	24	<u>511</u>	<u>387</u>	509	389	513	386	24	<u>511</u>	<u>387</u>	509	389	513	386		
459.GemsFDTD	24	<u>2059</u>	<u>124</u>	2057	124	2060	124	12	1025	124	1026	124	<u>1026</u>	<u>124</u>		
465.tonto	24	808	292	<u>807</u>	<u>293</u>	796	297	24	<u>789</u>	<u>299</u>	773	305	796	297		
470.lbm	24	2658	124	<u>2660</u>	<u>124</u>	2663	124	12	1267	130	1268	130	<u>1268</u>	<u>130</u>		
481.wrf	24	1144	234	1145	234	<u>1144</u>	<u>234</u>	24	1144	234	1145	234	<u>1144</u>	<u>234</u>		
482.sphinx3	24	2191	213	<u>2196</u>	<u>213</u>	2198	213	24	2080	225	<u>2081</u>	<u>225</u>	2082	225		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'/usr/bin/numactl' used to bind processes to CPUs

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 249

BladeSymphony BS2000 (Intel Xeon X5680)

SPECfp_rate_base2006 = 243

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 249

BladeSymphony BS2000 (Intel Xeon X5680)

SPECfp_rate_base2006 = 243

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 249

BladeSymphony BS2000 (Intel Xeon X5680)

SPECfp_rate_base2006 = 243

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.deallI: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 249

BladeSymphony BS2000 (Intel Xeon X5680)

SPECfp_rate_base2006 = 243

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:24:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 May 2010.