



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 42.9

IBM System x3250 M3 (Intel Pentium G6950)

SPECint\_rate\_base2006 = 39.1

CPU2006 license: 11


Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

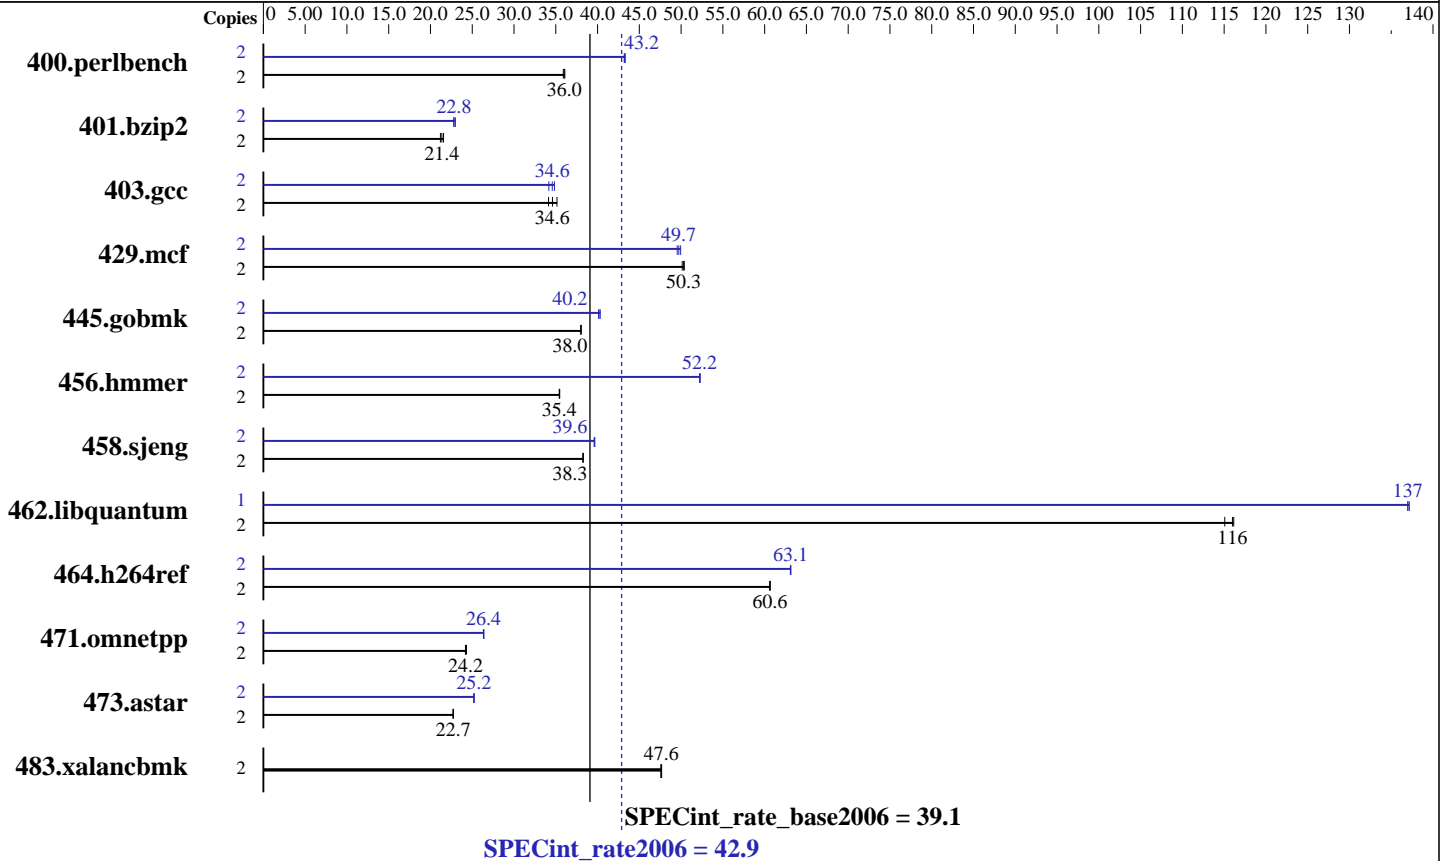

### Hardware

CPU Name: Intel Pentium G6950  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB PC3-10600E CL9, 2 Rank)  
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 42.9

IBM System x3250 M3 (Intel Pentium G6950)

SPECint\_rate\_base2006 = 39.1

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Results Table

| Benchmark      | Base   |            |             |            |             |            |             | Peak   |            |             |            |             |            |             |
|----------------|--------|------------|-------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|
|                | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | 2      | <b>543</b> | <b>36.0</b> | 542        | 36.1        | 544        | 35.9        | 2      | 452        | 43.2        | <b>452</b> | <b>43.2</b> | 451        | 43.3        |
| 401.bzip2      | 2      | <b>903</b> | <b>21.4</b> | 895        | 21.6        | 911        | 21.2        | 2      | 840        | 23.0        | <b>845</b> | <b>22.8</b> | 847        | 22.8        |
| 403.gcc        | 2      | 458        | 35.1        | 472        | 34.1        | <b>465</b> | <b>34.6</b> | 2      | <b>466</b> | <b>34.6</b> | 471        | 34.2        | 462        | 34.8        |
| 429.mcf        | 2      | <b>363</b> | <b>50.3</b> | 362        | 50.4        | 364        | 50.1        | 2      | <b>367</b> | <b>49.7</b> | 365        | 49.9        | 368        | 49.5        |
| 445.gobmk      | 2      | 552        | 38.0        | 552        | 38.0        | <b>552</b> | <b>38.0</b> | 2      | <b>522</b> | <b>40.2</b> | 520        | 40.3        | 523        | 40.1        |
| 456.hammer     | 2      | <b>527</b> | <b>35.4</b> | 527        | 35.4        | 526        | 35.5        | 2      | 357        | 52.2        | <b>357</b> | <b>52.2</b> | 357        | 52.3        |
| 458.sjeng      | 2      | 633        | 38.2        | 632        | 38.3        | <b>632</b> | <b>38.3</b> | 2      | <b>611</b> | <b>39.6</b> | 611        | 39.6        | 610        | 39.7        |
| 462.libquantum | 2      | 360        | 115         | <b>357</b> | <b>116</b>  | 357        | 116         | 1      | 151        | 137         | <b>151</b> | <b>137</b>  | 151        | 137         |
| 464.h264ref    | 2      | 730        | 60.7        | 730        | 60.6        | <b>730</b> | <b>60.6</b> | 2      | 702        | 63.1        | <b>701</b> | <b>63.1</b> | 701        | 63.1        |
| 471.omnetpp    | 2      | 514        | 24.3        | 517        | 24.2        | <b>516</b> | <b>24.2</b> | 2      | 474        | 26.4        | 475        | 26.3        | <b>474</b> | <b>26.4</b> |
| 473.astar      | 2      | 618        | 22.7        | 618        | 22.7        | <b>618</b> | <b>22.7</b> | 2      | 556        | 25.2        | 557        | 25.2        | <b>557</b> | <b>25.2</b> |
| 483.xalancbmk  | 2      | 289        | 47.7        | <b>290</b> | <b>47.6</b> | 290        | 47.6        | 2      | 289        | 47.7        | <b>290</b> | <b>47.6</b> | 290        | 47.6        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Platform Notes

Turbo Mode Enable  
Turbo Boost set to Traditional  
CPU C State Enable

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 42.9

IBM System x3250 M3 (Intel Pentium G6950)

SPECint\_rate\_base2006 = 39.1

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 42.9

IBM System x3250 M3 (Intel Pentium G6950)

SPECint\_rate\_base2006 = 39.1

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jan-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: -xSSSE3 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -parallel -auto-ilp32 -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 42.9

IBM System x3250 M3 (Intel Pentium G6950)

SPECint\_rate\_base2006 = 39.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2010

Hardware Availability: Jan-2010

Software Availability: Jan-2010

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 09:19:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 June 2010.