



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp®\_rate2006 = 239**

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

**SPECfp\_rate\_base2006 = 231**

CPU2006 license: 001176


Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

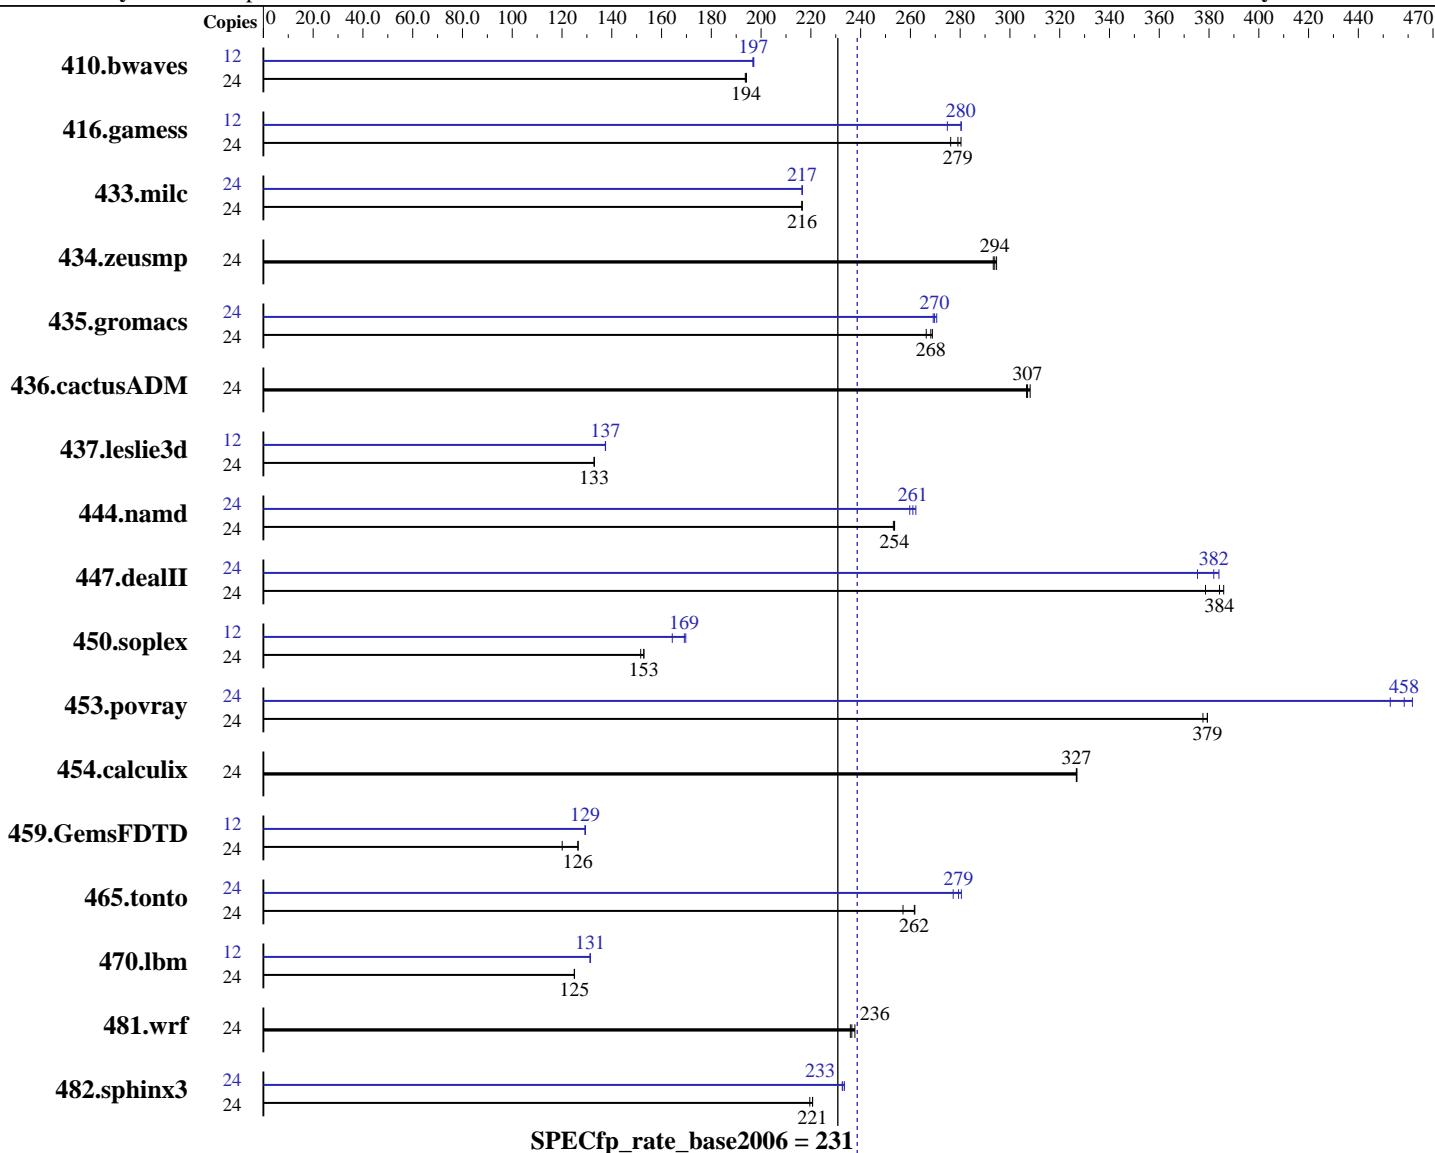

### Hardware

CPU Name: Intel Xeon X5650  
CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
CPU MHz: 2666  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
Compiler: Kernel 2.6.27.19-5-default  
Auto Parallel: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
File System: Build 20091130 Package ID: l\_cproc\_p\_11.1.064,  
System State: l\_cprof\_p\_11.1.064  
No  
ReiserFS  
Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

**SPECfp\_rate2006 = 239**

**SPECfp\_rate\_base2006 = 231**

**CPU2006 license:** 001176

**Test date:** May-2010

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2010

**Tested by:** Supermicro

**Software Availability:** Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1684	194	<b>1682</b>	<b>194</b>	1680	194	12	829	197	827	197	<b>828</b>	<b>197</b>
416.gamess	24	<b>1684</b>	<b>279</b>	1676	280	1702	276	12	838	280	855	275	<b>838</b>	<b>280</b>
433.milc	24	<b>1018</b>	<b>216</b>	1018	217	1018	216	24	1017	217	<b>1018</b>	<b>217</b>	1018	216
434.zeusmp	24	745	293	<b>743</b>	<b>294</b>	741	295	24	745	293	<b>743</b>	<b>294</b>	741	295
435.gromacs	24	<b>639</b>	<b>268</b>	637	269	643	266	24	<b>635</b>	<b>270</b>	637	269	633	271
436.cactusADM	24	931	308	<b>934</b>	<b>307</b>	935	307	24	931	308	<b>934</b>	<b>307</b>	935	307
437.leslie3d	24	<b>1697</b>	<b>133</b>	1696	133	1697	133	12	820	137	821	137	<b>820</b>	<b>137</b>
444.namd	24	<b>759</b>	<b>254</b>	759	254	760	253	24	741	260	734	262	<b>737</b>	<b>261</b>
447.dealII	24	725	379	711	386	<b>715</b>	<b>384</b>	24	<b>719</b>	<b>382</b>	731	375	<b>715</b>	384
450.soplex	24	1320	152	<b>1309</b>	<b>153</b>	1309	153	12	609	164	590	170	<b>592</b>	<b>169</b>
453.povray	24	338	378	337	379	<b>337</b>	<b>379</b>	24	277	462	<b>279</b>	<b>458</b>	282	453
454.calculix	24	606	327	<b>606</b>	<b>327</b>	606	327	24	606	327	<b>606</b>	<b>327</b>	606	327
459.GemsFDTD	24	2121	120	<b>2016</b>	<b>126</b>	2012	127	12	984	129	985	129	<b>985</b>	<b>129</b>
465.tonto	24	902	262	<b>903</b>	<b>262</b>	919	257	24	842	280	852	277	<b>845</b>	<b>279</b>
470.lbm	24	2637	125	<b>2638</b>	<b>125</b>	2639	125	12	1256	131	1255	131	<b>1255</b>	<b>131</b>
481.wrf	24	1128	238	<b>1134</b>	<b>236</b>	1137	236	24	1128	238	<b>1134</b>	<b>236</b>	1137	236
482.sphinx3	24	2130	220	2119	221	<b>2120</b>	<b>221</b>	24	2003	233	<b>2009</b>	<b>233</b>	2011	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
 As tested, the system used a Supermicro  
 PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,  
 and 2 FAN-0077L cooling fans.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

**SPECfp\_rate2006 = 239**

**SPECfp\_rate\_base2006 = 231**

**CPU2006 license:** 001176

**Test date:** May-2010

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2010

**Tested by:** Supermicro

**Software Availability:** Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

Fortran benchmarks:

  ifort -m64

Benchmarks using both Fortran and C:

  icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
  447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

**SPECfp\_rate2006 = 239**

**SPECfp\_rate\_base2006 = 231**

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

**SPECfp\_rate2006 = 239**

**SPECfp\_rate\_base2006 = 231**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** May-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xsse4 .2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xsse4 .2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

**SPECfp\_rate2006 = 239**

**SPECfp\_rate\_base2006 = 231**

**CPU2006 license:** 001176

**Test date:** May-2010

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2010

**Tested by:** Supermicro

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:00:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 June 2010.