



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec


SPECint®\_rate2006 = 348

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

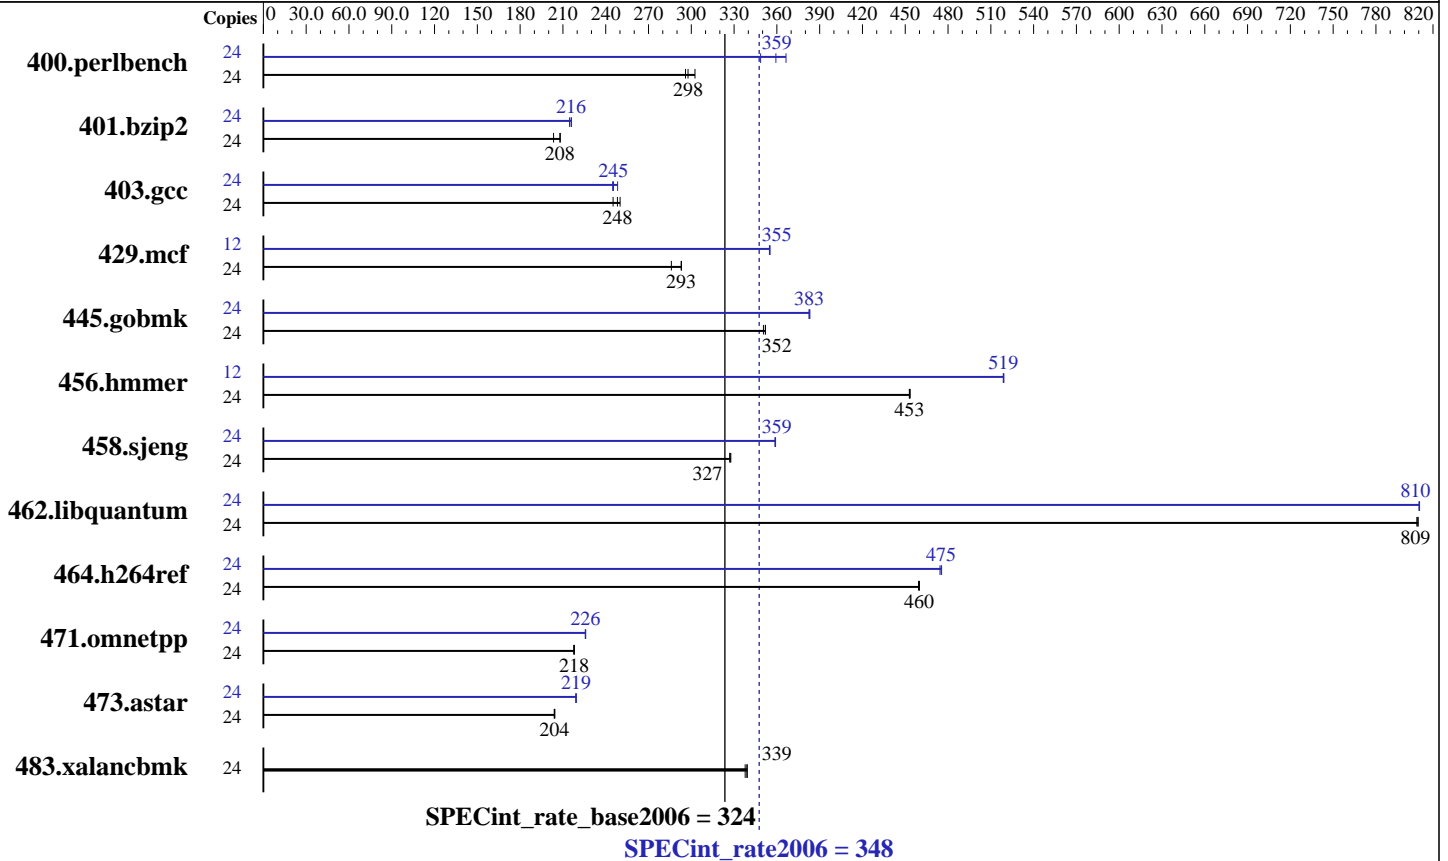

## Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4GB, DDR3-1333, Dual Rank, CL 9, ECC)  
 Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l\_cproc\_p\_11.1.072  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 348

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>788</b>	<b>298</b>	775	303	792	296	24	673	349	<b>653</b>	<b>359</b>	640	366
401.bzip2	24	1138	203	1113	208	<b>1114</b>	<b>208</b>	24	1079	215	1072	216	<b>1074</b>	<b>216</b>
403.gcc	24	<b>778</b>	<b>248</b>	788	245	772	250	24	<b>787</b>	<b>245</b>	778	248	789	245
429.mcf	24	765	286	747	293	<b>747</b>	<b>293</b>	12	<b>308</b>	<b>355</b>	308	355	308	355
445.gobmk	24	<b>715</b>	<b>352</b>	718	351	715	352	24	658	383	<b>658</b>	<b>383</b>	657	383
456.hammer	24	494	453	<b>494</b>	<b>453</b>	494	453	12	216	519	<b>216</b>	<b>519</b>	216	519
458.sjeng	24	888	327	<b>887</b>	<b>327</b>	886	328	24	<b>809</b>	<b>359</b>	809	359	810	359
462.libquantum	24	615	809	614	810	<b>614</b>	<b>809</b>	24	<b>614</b>	<b>810</b>	613	811	614	810
464.h264ref	24	1156	459	<b>1155</b>	<b>460</b>	1155	460	24	1117	475	1120	474	<b>1118</b>	<b>475</b>
471.omnetpp	24	688	218	689	218	<b>688</b>	<b>218</b>	24	665	226	664	226	<b>664</b>	<b>226</b>
473.astar	24	825	204	826	204	<b>825</b>	<b>204</b>	24	768	219	769	219	<b>769</b>	<b>219</b>
483.xalancbmk	24	490	338	<b>489</b>	<b>339</b>	488	339	24	490	338	<b>489</b>	<b>339</b>	488	339

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

## General Notes

This result was measured on the Servidor Itaotec MX223.  
The Servidor Itaotec MX223 and the Servidor Itaotec MX203 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 348

Servidor Itautec MX203 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 348

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 348

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Peak Optimization Flags (Continued)

473.astar (continued):  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.1-linux64-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:46:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 June 2010.