



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp®_rate2006 = 563

SPECfp_rate_base2006 = 544

CPU2006 license: 9019


Test date: May-2010

Test sponsor: Cisco Systems

Hardware Availability: Jun-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

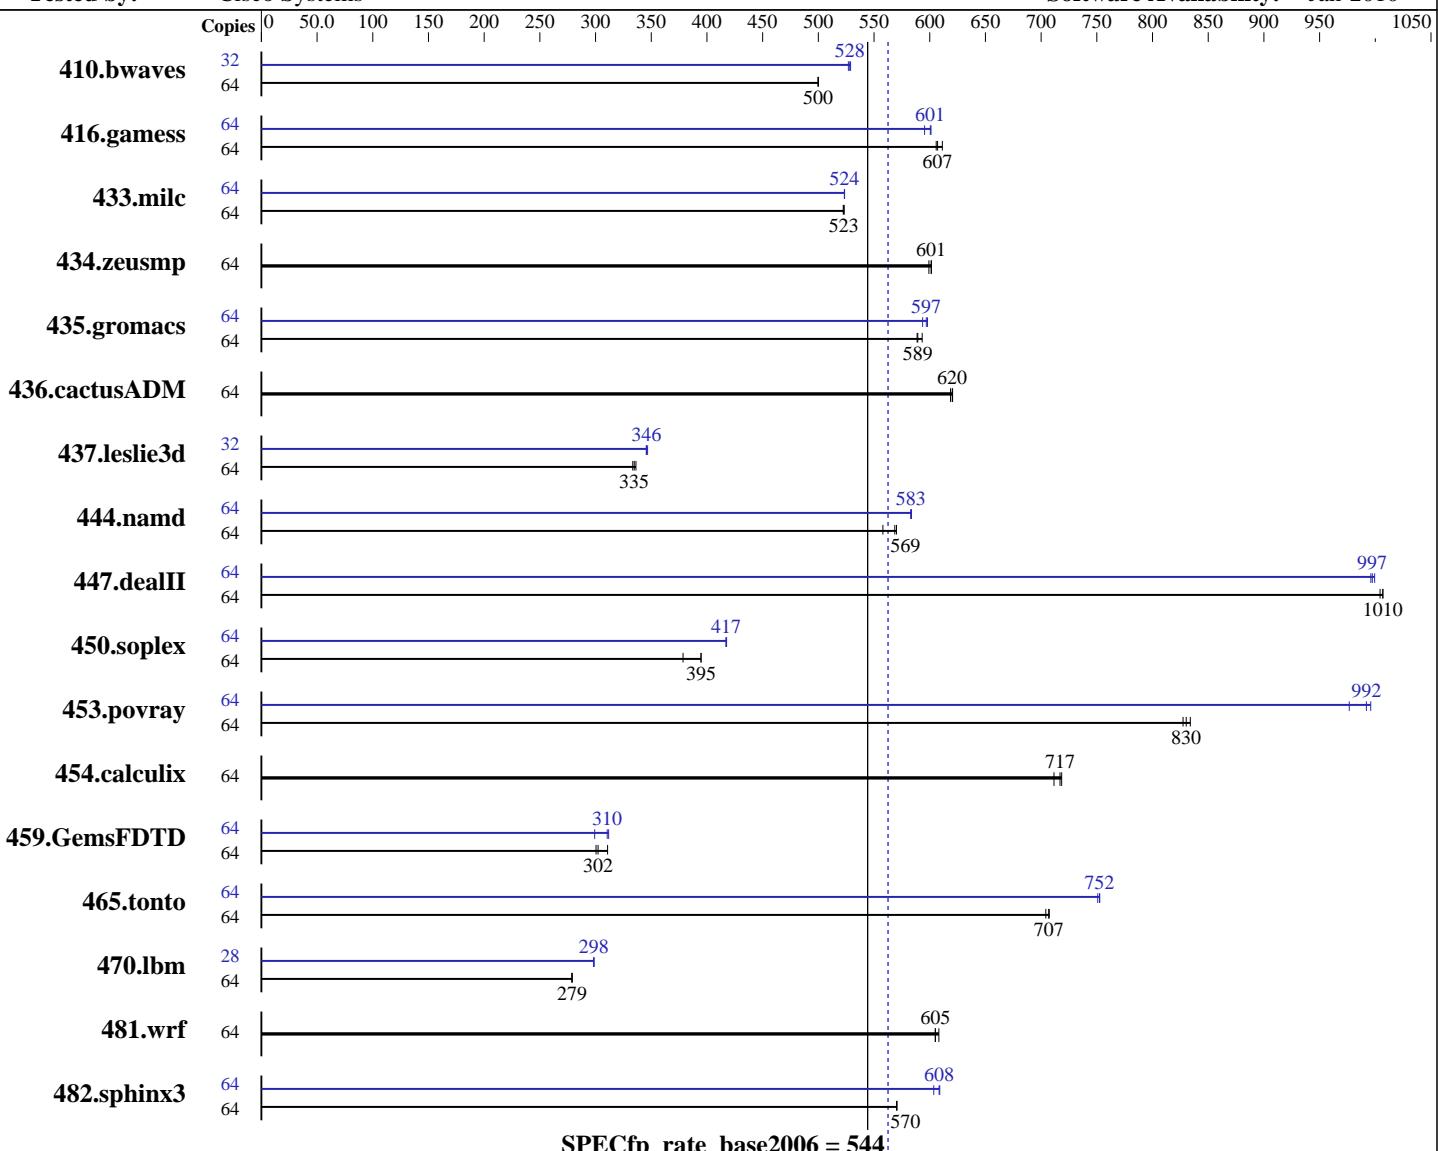

Hardware

CPU Name: Intel Xeon X7560
CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz: 2266
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2,3,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-19-5-default
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064 l_cprof_p_11.1.064
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate2006 = 563

SPECfp_rate_base2006 = 544

CPU2006 license: 9019

Test date: May-2010

Test sponsor: Cisco Systems

Hardware Availability: Jun-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32x8GB, PC3-8500R, CL9, Quad Rank, ECC)
 Disk Subsystem: 146 GB SAS, 15K RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1739	500	1740	500	1740	500	32	822	529	823	528	825	527
416.gamess	64	2050	611	2064	607	2068	606	64	2085	601	2087	601	2105	595
433.milc	64	1124	523	1123	523	1125	522	64	1122	524	1122	524	1123	523
434.zeusmp	64	969	601	968	601	972	599	64	969	601	968	601	972	599
435.gromacs	64	770	593	776	589	775	589	64	766	597	770	594	764	598
436.cactusADM	64	1236	619	1232	621	1233	620	64	1236	619	1232	621	1233	620
437.leslie3d	64	1789	336	1804	333	1797	335	32	868	347	870	346	871	346
444.namd	64	920	558	903	569	900	570	64	880	583	880	583	879	584
447.dealII	64	729	1000	727	1010	727	1010	64	733	999	734	997	735	996
450.soplex	64	1410	379	1352	395	1352	395	64	1279	417	1280	417	1278	418
453.povray	64	412	827	410	830	408	834	64	343	992	349	977	342	996
454.calculix	64	736	717	735	718	742	712	64	736	717	735	718	742	712
459.GemsFDTD	64	2260	300	2247	302	2185	311	64	2269	299	2178	312	2187	310
465.tonto	64	891	707	890	707	894	704	64	837	753	839	751	837	752
470.lbm	64	3152	279	3155	279	3152	279	28	1288	299	1289	298	1290	298
481.wrf	64	1175	608	1181	605	1182	605	64	1175	608	1181	605	1182	605
482.sphinx3	64	2187	570	2186	571	2187	570	64	2050	608	2048	609	2067	604

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Binaries compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M1 (Intel Xeon X7560, 2.27 GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

SPECfp_rate2006 = 563

SPECfp_rate_base2006 = 544

Test date: May-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M1 (Intel Xeon X7560, 2.27 GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

SPECfp_rate2006 = 563

SPECfp_rate_base2006 = 544

Test date: May-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate2006 = 563

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate2006 = 563

SPECfp_rate_base2006 = 544

CPU2006 license: 9019

Test date: May-2010

Test sponsor: Cisco Systems

Hardware Availability: Jun-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 08:28:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 June 2010.