



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R610  
(Intel Xeon E5530, 2.40 GHz)

SPECfp<sup>®</sup>\_rate2006 = 166

SPECfp\_rate\_base2006 = 161

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

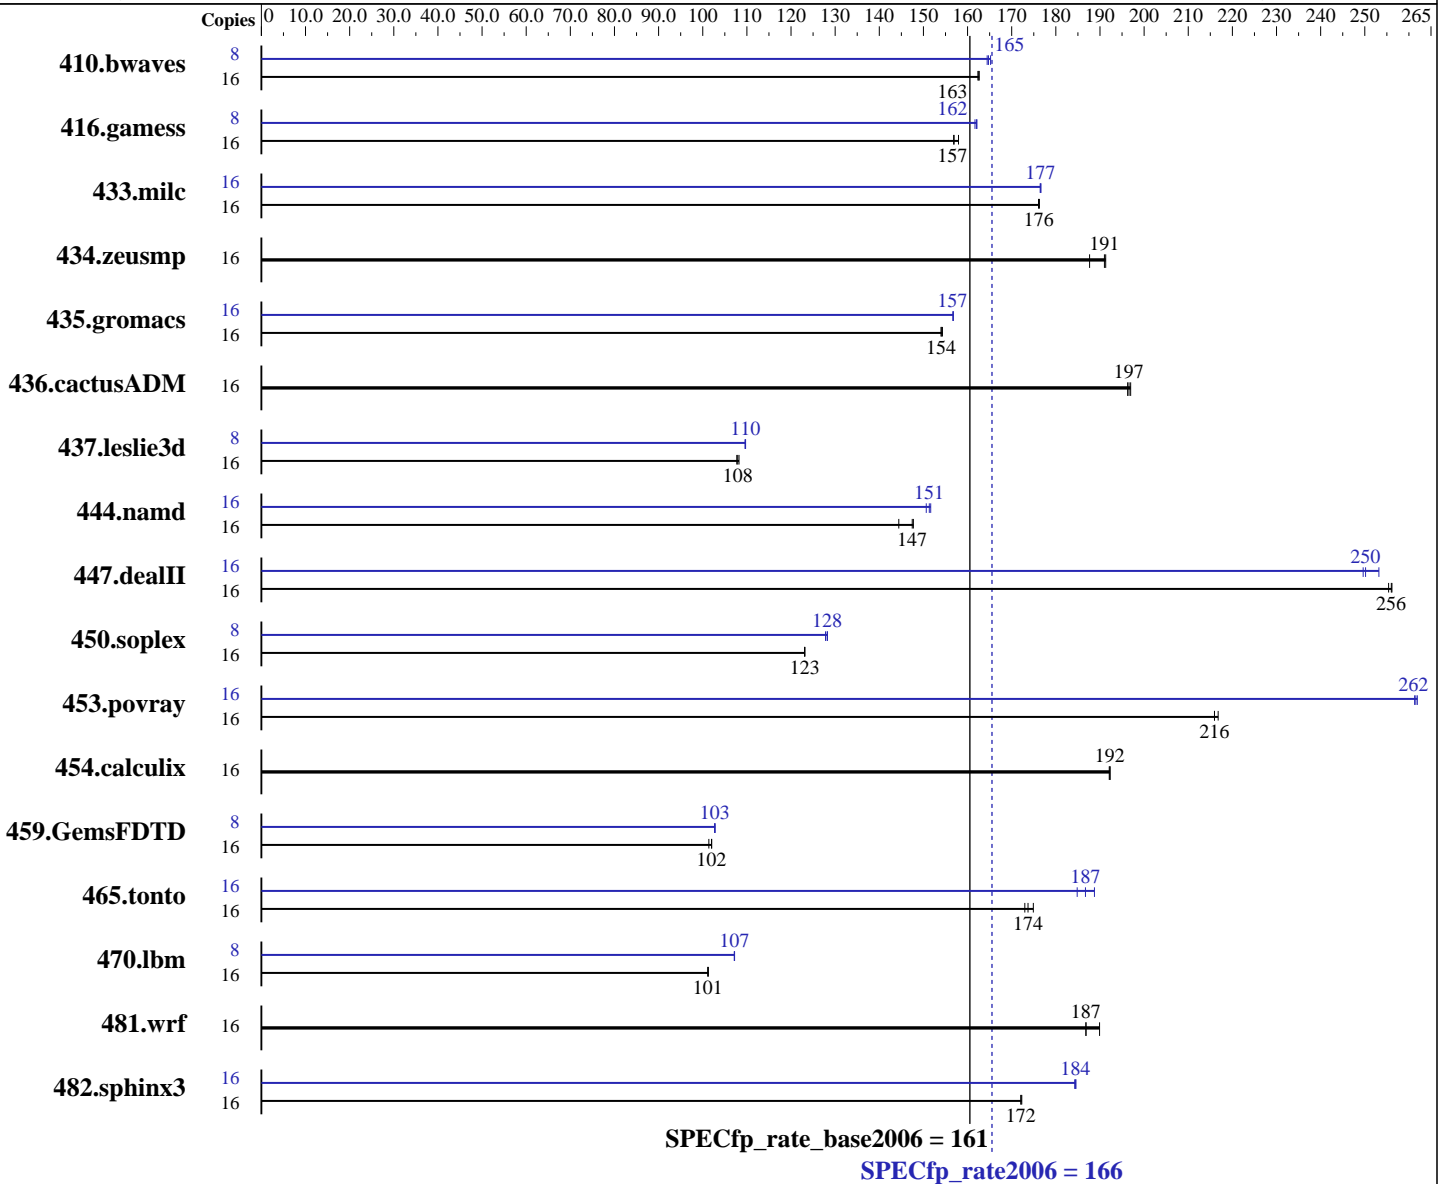

### Hardware

CPU Name: Intel Xeon E5530  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: I\_cproc\_p\_11.1.064, I\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R610  
(Intel Xeon E5530, 2.40 GHz)

SPECfp\_rate2006 = 166

SPECfp\_rate\_base2006 = 161

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1337	163	<b><u>1338</u></b>	<b><u>163</u></b>	1339	162	8	<b><u>660</u></b>	<b><u>165</u></b>	658	165	661	164
416.gamess	16	1983	158	1997	157	<b><u>1996</u></b>	<b><u>157</u></b>	8	969	162	966	162	<b><u>967</u></b>	<b><u>162</u></b>
433.milc	16	<b><u>834</u></b>	<b><u>176</u></b>	833	176	834	176	16	832	177	<b><u>832</u></b>	<b><u>177</u></b>	832	176
434.zeusmp	16	761	191	<b><u>762</u></b>	<b><u>191</u></b>	776	188	16	761	191	<b><u>762</u></b>	<b><u>191</u></b>	776	188
435.gromacs	16	742	154	<b><u>742</u></b>	<b><u>154</u></b>	740	154	16	729	157	729	157	<b><u>729</u></b>	<b><u>157</u></b>
436.cactusADM	16	971	197	<b><u>973</u></b>	<b><u>197</u></b>	974	196	16	971	197	<b><u>973</u></b>	<b><u>197</u></b>	974	196
437.leslie3d	16	<b><u>1394</u></b>	<b><u>108</u></b>	1390	108	1396	108	8	685	110	<b><u>686</u></b>	<b><u>110</u></b>	686	110
444.namd	16	889	144	869	148	<b><u>870</u></b>	<b><u>147</u></b>	16	846	152	<b><u>848</u></b>	<b><u>151</u></b>	852	151
447.dealII	16	717	255	<b><u>715</u></b>	<b><u>256</u></b>	715	256	16	733	250	<b><u>732</u></b>	<b><u>250</u></b>	723	253
450.soplex	16	1084	123	1084	123	<b><u>1084</u></b>	<b><u>123</u></b>	8	520	128	522	128	<b><u>521</u></b>	<b><u>128</u></b>
453.povray	16	<b><u>394</u></b>	<b><u>216</u></b>	394	216	393	217	16	325	262	<b><u>325</u></b>	<b><u>262</u></b>	326	261
454.calculix	16	<b><u>687</u></b>	<b><u>192</u></b>	687	192	687	192	16	<b><u>687</u></b>	<b><u>192</u></b>	687	192	687	192
459.GemsFDTD	16	1664	102	<b><u>1664</u></b>	<b><u>102</u></b>	1674	101	8	827	103	826	103	<b><u>826</u></b>	<b><u>103</u></b>
465.tonto	16	910	173	<b><u>906</u></b>	<b><u>174</u></b>	900	175	16	<b><u>843</u></b>	<b><u>187</u></b>	834	189	852	185
470.lbm	16	2171	101	<b><u>2173</u></b>	<b><u>101</u></b>	2173	101	8	1026	107	<b><u>1026</u></b>	<b><u>107</u></b>	1025	107
481.wrf	16	<b><u>957</u></b>	<b><u>187</u></b>	941	190	957	187	16	<b><u>957</u></b>	<b><u>187</u></b>	941	190	957	187
482.sphinx3	16	1810	172	1812	172	<b><u>1812</u></b>	<b><u>172</u></b>	16	1690	185	<b><u>1690</u></b>	<b><u>184</u></b>	1692	184

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
The Dell PowerEdge R610 and  
the Bull NovaScale R440 F2 models are electronically equivalent.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R610  
(Intel Xeon E5530, 2.40 GHz)

**SPECfp\_rate2006 = 166**

**SPECfp\_rate\_base2006 = 161**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Bull SAS

**Test date:** May-2010  
**Hardware Availability:** Mar-2009  
**Software Availability:** Dec-2009

## General Notes (Continued)

The results have been measured on a Bull NovaScale R440 F2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R610  
(Intel Xeon E5530, 2.40 GHz)

**SPECfp\_rate2006 = 166**

**SPECfp\_rate\_base2006 = 161**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Bull SAS

**Test date:** May-2010  
**Hardware Availability:** Mar-2009  
**Software Availability:** Dec-2009

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
  
482.sphinx3: icc -m32  
  
C++ benchmarks (except as noted below):  
icpc -m64  
  
450.soplex: icpc -m32  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R610  
(Intel Xeon E5530, 2.40 GHz)

**SPECfp\_rate2006 = 166**

**SPECfp\_rate\_base2006 = 161**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Bull SAS

**Test date:** May-2010

**Hardware Availability:** Mar-2009

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R610  
(Intel Xeon E5530, 2.40 GHz)

**SPECfp\_rate2006 = 166**

**SPECfp\_rate\_base2006 = 161**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Bull SAS

**Test date:** May-2010

**Hardware Availability:** Mar-2009

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:09:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 June 2010.