



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp®_rate2006 = 177

Motherboard X8DT3-LN4F (Intel Xeon E5640, 2.66GHz)

SPECfp_rate_base2006 = 171

CPU2006 license: 001176


Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

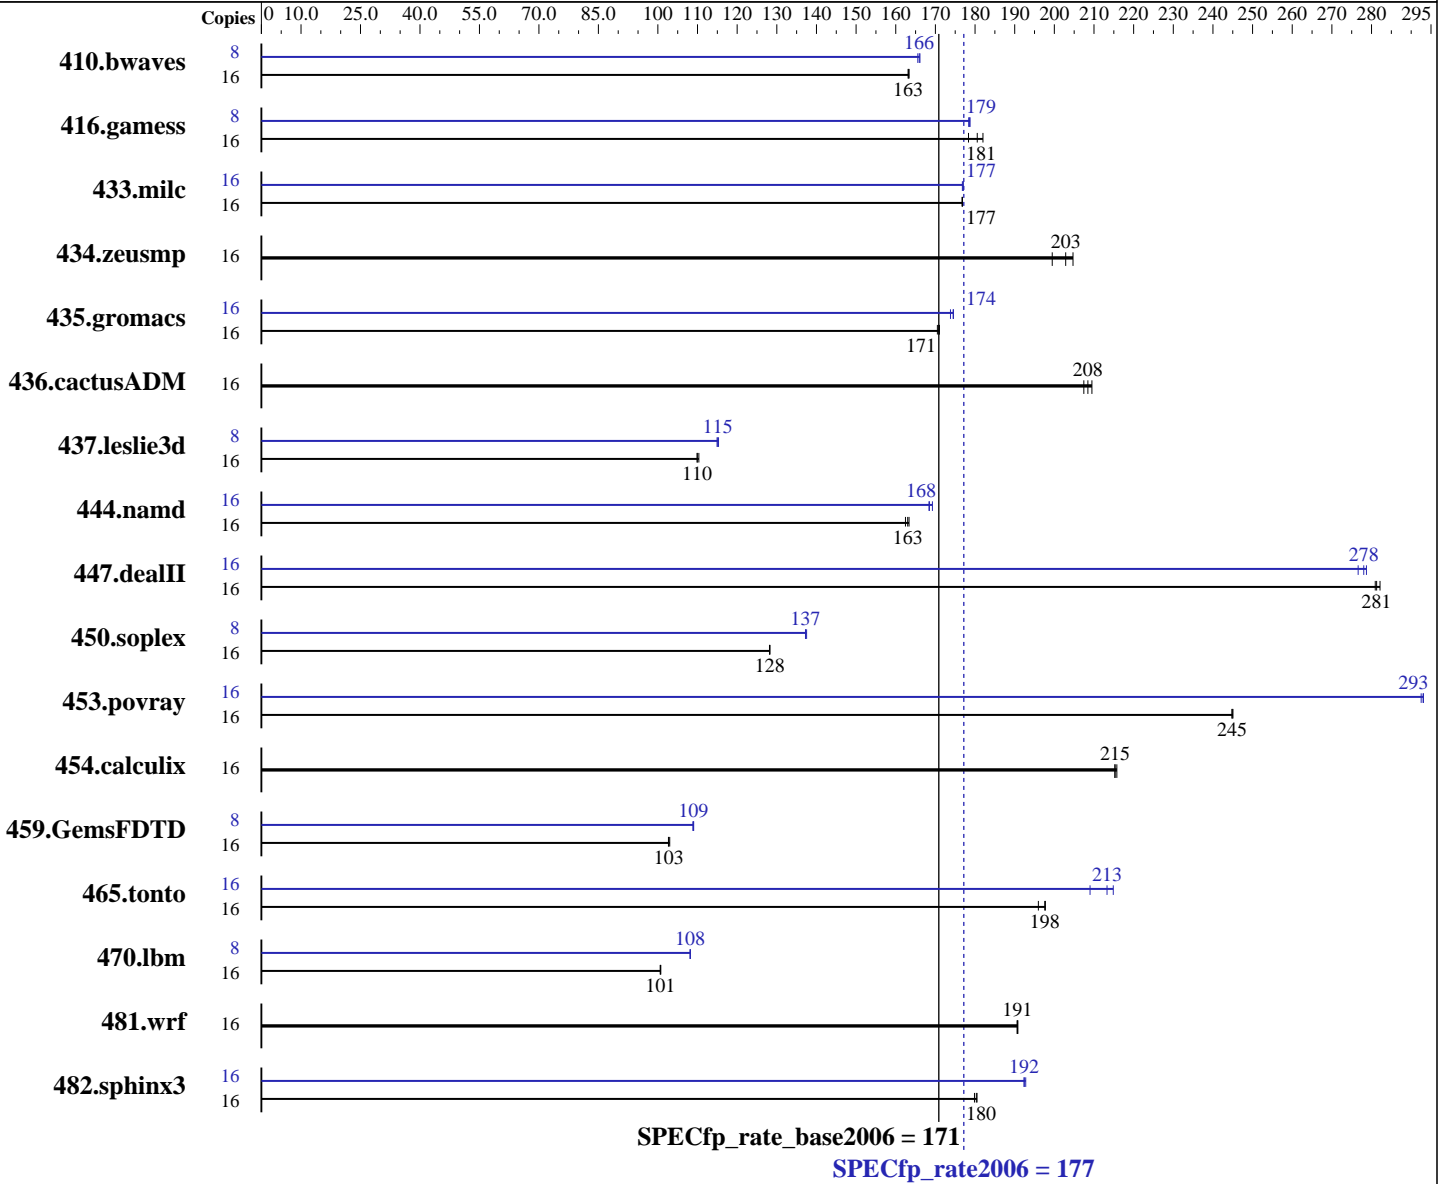

Hardware

CPU Name: Intel Xeon E5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 177

Motherboard X8DT3-LN4F (Intel Xeon E5640, 2.66GHz)

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 DDR3-1066 RDIMM, ECC, CL7)
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1331	163	1333	163	1333	163	8	657	166	655	166	655	166
416.gamess	16	1735	181	1757	178	1721	182	8	876	179	877	179	878	178
433.milc	16	831	177	831	177	831	177	16	830	177	830	177	831	177
434.zeusmp	16	718	203	730	199	711	205	16	718	203	730	199	711	205
435.gromacs	16	668	171	670	170	668	171	16	654	175	655	174	657	174
436.cactusADM	16	922	207	913	209	917	208	16	922	207	913	209	917	208
437.leslie3d	16	1368	110	1368	110	1363	110	8	654	115	653	115	652	115
444.namd	16	786	163	790	162	787	163	16	762	168	758	169	762	168
447.dealII	16	649	282	652	281	651	281	16	662	277	657	279	658	278
450.soplex	16	1040	128	1041	128	1041	128	8	486	137	486	137	485	138
453.povray	16	348	245	347	245	348	245	16	291	293	291	293	290	293
454.calculix	16	613	215	612	216	613	215	16	613	215	612	216	613	215
459.GemsFDTD	16	1653	103	1652	103	1648	103	8	780	109	779	109	779	109
465.tonto	16	797	198	803	196	796	198	16	753	209	738	213	733	215
470.lbm	16	2182	101	2184	101	2186	101	8	1016	108	1016	108	1016	108
481.wrf	16	937	191	937	191	938	191	16	937	191	937	191	938	191
482.sphinx3	16	1729	180	1728	180	1734	180	16	1618	193	1621	192	1621	192

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro CSE-745TQ-920B chassis.
The chassis is bundled with a PWS-920P-1R power supply, 2 SNK-P0038P heatsinks, as well as 2 FAN-0082L4 and 3 FAN-0074L4 cooling fans.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 177

Motherboard X8DT3-LN4F (Intel Xeon E5640, 2.66GHz)

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 177

Motherboard X8DT3-LN4F (Intel Xeon E5640, 2.66GHz)

SPECfp_rate_base2006 = 171

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.deallI: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 177

Motherboard X8DT3-LN4F (Intel Xeon E5640, 2.66GHz)

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 177

Motherboard X8DT3-LN4F (Intel Xeon E5640, 2.66GHz)

SPECfp_rate_base2006 = 171

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:10:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2010.