SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX223 (Intel Xeon X5650)

SPECint®_rate2006 = 326

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

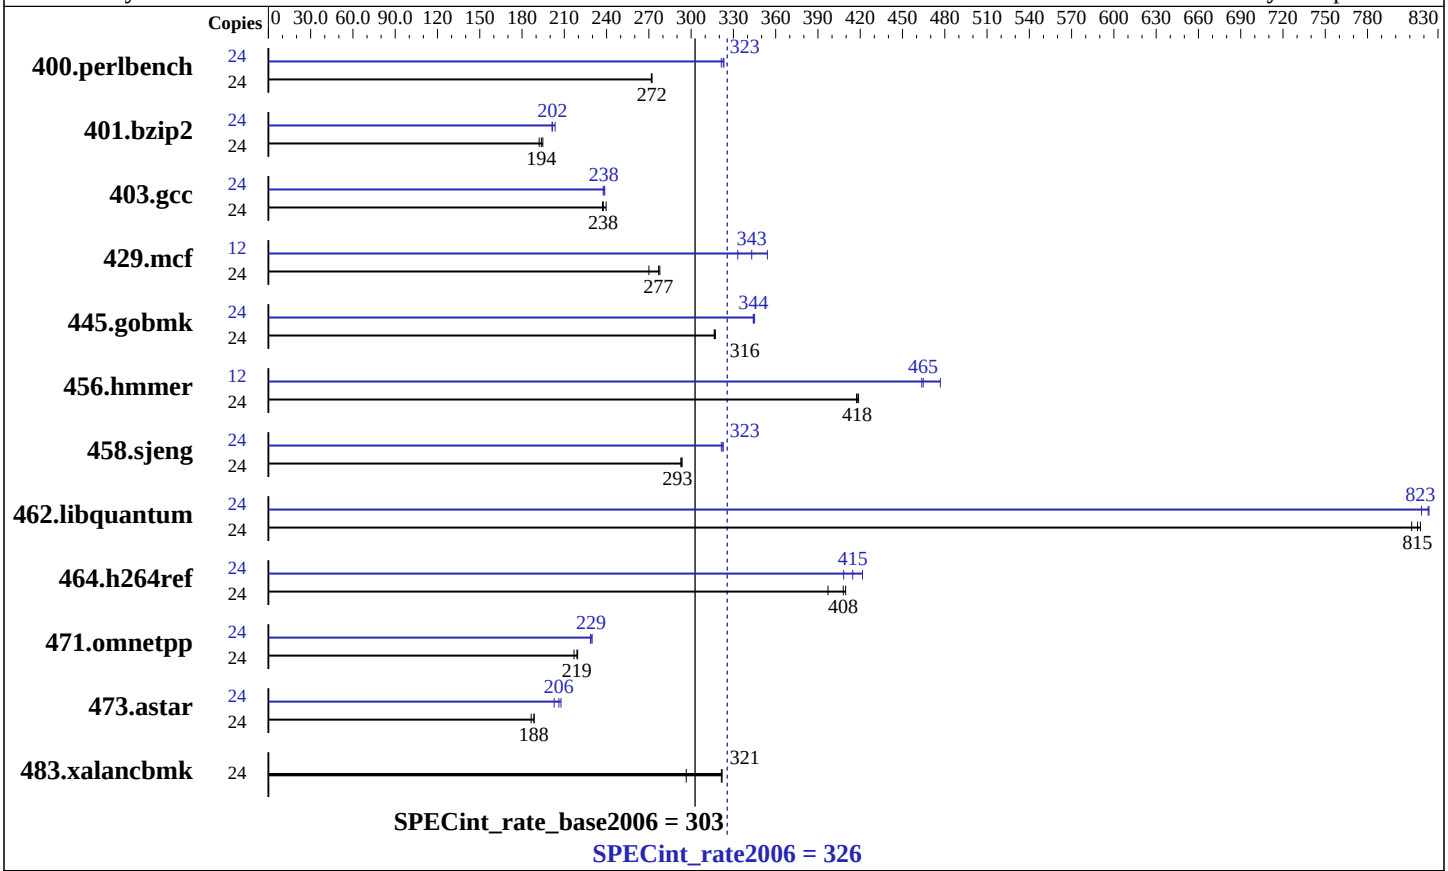

Hardware

CPU Name:	Intel Xeon X5650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.06 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4GB, DDR3-1333, Dual Rank, CL 9, ECC)
Disk Subsystem:	1 x 160 GB SATA-2, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler:	Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l_cproc_p_11.1.072
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX223 (Intel Xeon X5650)

SPECint_rate2006 = 326

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	862	272	**862**	**272**	863	272	24	725	323	**726**	**323**	730	321
401.bzip2	24	1205	192	1189	195	**1196**	**194**	24	1150	201	1138	203	**1149**	**202**
403.gcc	24	806	240	**813**	**238**	815	237	24	809	239	813	238	**811**	**238**
429.mcf	24	811	270	788	278	**790**	**277**	12	329	333	**319**	**343**	309	354
445.gobmk	24	**796**	**316**	794	317	796	316	24	730	345	**731**	**344**	732	344
456.hmmer	24	535	419	**536**	**418**	536	417	12	241	464	235	477	**241**	**465**
458.sjeng	24	989	294	**990**	**293**	992	293	24	900	323	**900**	**323**	904	321
462.libquantum	24	613	811	**610**	**815**	608	818	24	608	818	**604**	**823**	604	824
464.h264ref	24	1297	410	**1302**	**408**	1337	397	24	1260	422	1301	408	**1281**	**415**
471.omnetpp	24	692	217	**685**	**219**	683	219	24	653	230	656	229	**655**	**229**
473.astar	24	903	186	893	189	**894**	**188**	24	831	203	**817**	**206**	811	208
483.xalancbmk	24	558	297	**515**	**321**	514	322	24	558	297	**515**	**321**	514	322

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
```

General Notes

```
This result was measured on the Servidor Itautec MX223.
The Servidor Itautec MX203 and the Servidor Itautec MX223 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/opt/sh/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

473.astar (continued):
`-L/opt/sh/SmartHeap_8/lib -lsmartheap64`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:23:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.