



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec


SPECint®\_rate2006 = 221

Servidor Itautec MX223 (Intel Xeon E5620)

SPECint\_rate\_base2006 = 207

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Jun-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

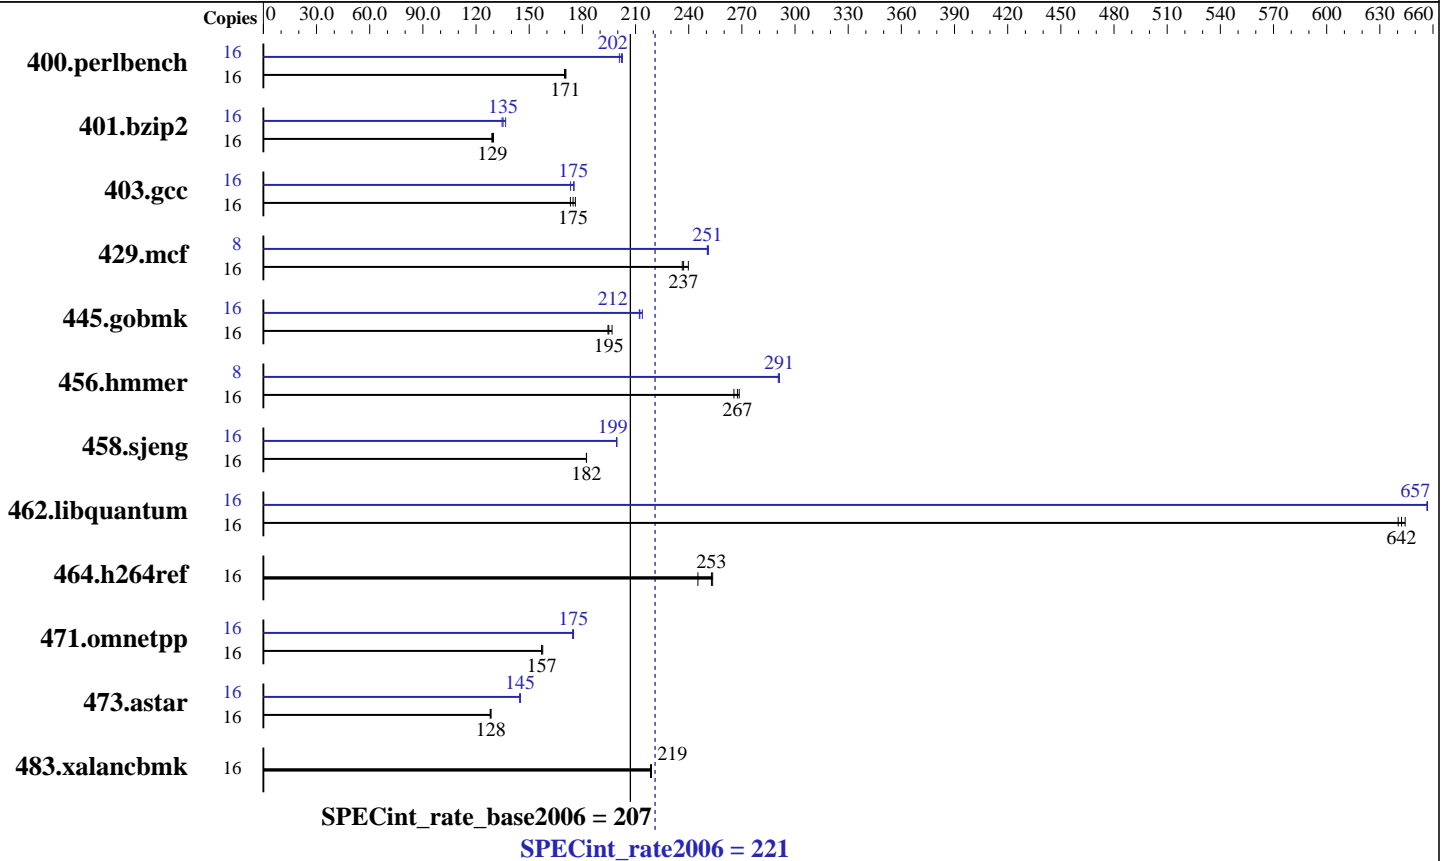

### Hardware

CPU Name: Intel Xeon E5620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4GB, DDR3-1066, Dual Rank, CL 7, ECC)  
 Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l\_cproc\_p\_11.1.072  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 221

Servidor Itautec MX223 (Intel Xeon E5620)

SPECint\_rate\_base2006 = 207

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Jun-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	920	170	916	171	<b>916</b>	<b>171</b>	16	<b>774</b>	<b>202</b>	778	201	772	203
401.bzip2	16	<b>1194</b>	<b>129</b>	1189	130	1198	129	16	1129	137	<b>1142</b>	<b>135</b>	1146	135
403.gcc	16	732	176	743	173	<b>737</b>	<b>175</b>	16	743	173	<b>736</b>	<b>175</b>	735	175
429.mcf	16	617	236	609	240	<b>615</b>	<b>237</b>	8	<b>291</b>	<b>251</b>	291	251	291	250
445.gobmk	16	853	197	863	194	<b>861</b>	<b>195</b>	16	791	212	<b>790</b>	<b>212</b>	785	214
456.hammer	16	562	266	<b>558</b>	<b>267</b>	556	269	8	257	291	<b>256</b>	<b>291</b>	256	291
458.sjeng	16	<b>1062</b>	<b>182</b>	1062	182	1062	182	16	972	199	<b>971</b>	<b>199</b>	970	200
462.libquantum	16	<b>516</b>	<b>642</b>	518	640	515	644	16	505	657	<b>505</b>	<b>657</b>	505	657
464.h264ref	16	1444	245	1397	254	<b>1400</b>	<b>253</b>	16	1444	245	1397	254	<b>1400</b>	<b>253</b>
471.omnetpp	16	637	157	<b>637</b>	<b>157</b>	634	158	16	571	175	<b>572</b>	<b>175</b>	573	174
473.astar	16	<b>876</b>	<b>128</b>	878	128	874	128	16	<b>776</b>	<b>145</b>	777	145	774	145
483.xalancbmk	16	505	218	<b>505</b>	<b>219</b>	504	219	16	505	218	<b>505</b>	<b>219</b>	504	219

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

## General Notes

This result was measured on the Servidor Itautec MX223.  
The Servidor Itautec MX203 and the Servidor Itautec MX223 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 221

Servidor Itautec MX223 (Intel Xeon E5620)

SPECint\_rate\_base2006 = 207

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Jun-2010

Hardware Availability: Apr-2010

Software Availability: Apr-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 221

Servidor Itautec MX223 (Intel Xeon E5620)

SPECint\_rate\_base2006 = 207

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Jun-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8.1/lib -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/opt/sh/SmartHeap\_8/lib -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 221

Servidor Itaotec MX223 (Intel Xeon E5620)

SPECint\_rate\_base2006 = 207

CPU2006 license: 9001

Test date: Jun-2010

Test sponsor: Itaotec

Hardware Availability: Apr-2010

Tested by: Itaotec

Software Availability: Apr-2010

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.1-linux64-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:25:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2010.