



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3


Test date: Jun-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

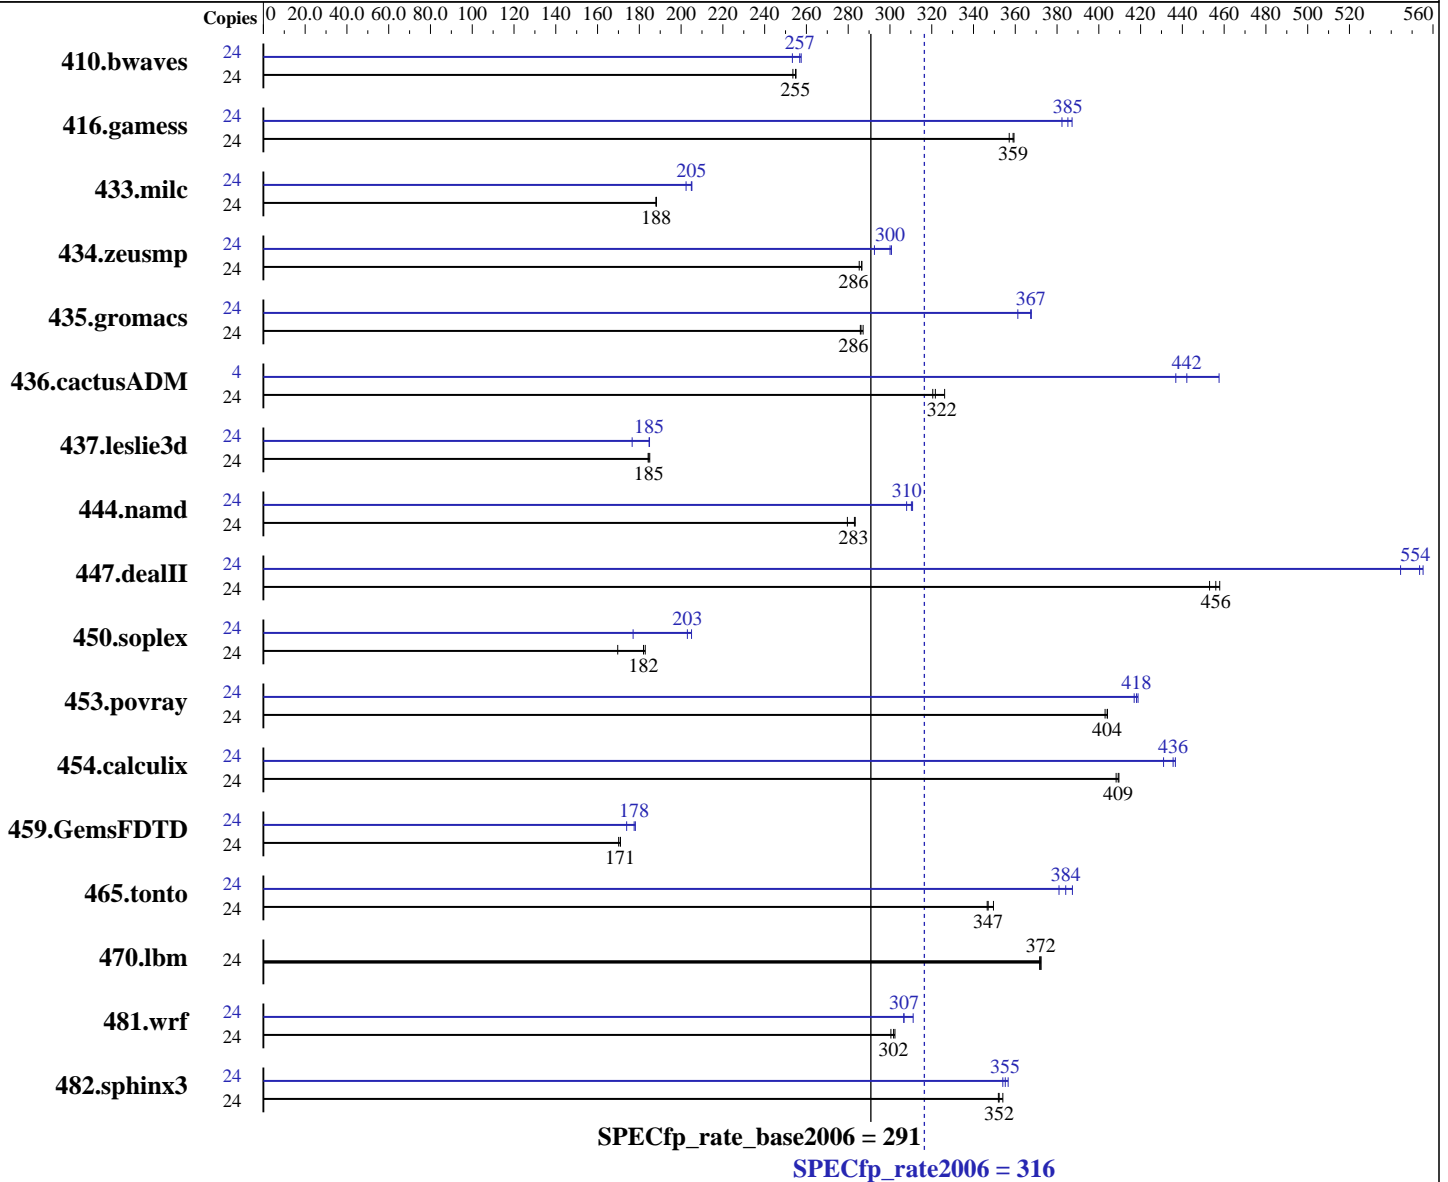

Hardware

CPU Name: AMD Opteron 6176 SE
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
 Compiler: x86 Open64 4.2.3 Compiler Suite
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3

Test date: Jun-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB, 2Rx8 PC3-10600R, CL9, ECC)
Disk Subsystem: 1 x 146 GB 10 K SAS
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1287	254	<u>1280</u>	<u>255</u>	1279	255	24	<u>1270</u>	<u>257</u>	1267	257	1288	253
416.gamess	24	<u>1309</u>	<u>359</u>	1316	357	1308	359	24	1214	387	1229	382	<u>1220</u>	<u>385</u>
433.milc	24	<u>1171</u>	<u>188</u>	1171	188	1172	188	24	1074	205	<u>1075</u>	<u>205</u>	1089	202
434.zeusmp	24	<u>762</u>	<u>286</u>	762	287	766	285	24	<u>728</u>	<u>300</u>	726	301	746	293
435.gromacs	24	600	286	<u>599</u>	<u>286</u>	597	287	24	474	361	<u>466</u>	<u>367</u>	466	368
436.cactusADM	24	<u>891</u>	<u>322</u>	895	320	879	326	4	<u>108</u>	<u>442</u>	109	437	104	458
437.leslie3d	24	1219	185	<u>1222</u>	<u>185</u>	1225	184	24	1220	185	<u>1222</u>	<u>185</u>	1278	177
444.namd	24	688	280	<u>680</u>	<u>283</u>	679	283	24	625	308	<u>620</u>	<u>310</u>	619	311
447.dealII	24	<u>602</u>	<u>456</u>	606	453	600	458	24	494	555	<u>496</u>	<u>554</u>	504	544
450.soplex	24	1180	170	<u>1100</u>	<u>182</u>	1095	183	24	1131	177	976	205	<u>986</u>	<u>203</u>
453.povray	24	317	403	<u>316</u>	<u>404</u>	316	404	24	306	417	<u>305</u>	<u>418</u>	305	419
454.calculix	24	483	410	<u>484</u>	<u>409</u>	485	408	24	453	437	<u>455</u>	<u>436</u>	459	431
459.GemsFDTD	24	1497	170	<u>1490</u>	<u>171</u>	1490	171	24	1430	178	<u>1434</u>	<u>178</u>	1464	174
465.tonto	24	676	350	681	347	<u>681</u>	<u>347</u>	24	610	387	620	381	<u>615</u>	<u>384</u>
470.lbm	24	886	372	<u>886</u>	<u>372</u>	887	372	24	886	372	<u>886</u>	<u>372</u>	887	372
481.wrf	24	887	302	892	300	<u>888</u>	<u>302</u>	24	862	311	<u>874</u>	<u>307</u>	874	307
482.sphinx3	24	1321	354	<u>1328</u>	<u>352</u>	1329	352	24	1312	357	1321	354	<u>1317</u>	<u>355</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Mar-2010

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-revA-libs/64:/cpu2006/amd1002mc-rate-revA-libs/32"
OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
 opencc

C++ benchmarks:
 openCC

Fortran benchmarks:
 openf95

Benchmarks using both Fortran and C:
 opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3

Test date: Jun-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3

Test date: Jun-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
 -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
 -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
 -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
 -CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
 -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
 -LNO:blocking=off -LNO:prefetch_ahead=5
 -LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3

Test date: Jun-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0

-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256

-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2

-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1

-HP

465.tonto: -march=barcelona -mso -Ofast

-OPT:alias=no_f90_pointer_alias -LNO:blocking=off

-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1

-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0

-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on

-LNO:prefetch_ahead=30 -WOPT:unroll=2

-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:prefetch_ahead=10 -LANG:copyinout=off

-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow

-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.html>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.xml>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 316

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECfp_rate_base2006 = 291

CPU2006 license: 3

Test date: Jun-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:20:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.