



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 253

PowerEdge R910 (Intel Xeon L7545, 1.87 GHz)

SPECint\_rate\_base2006 = 234

CPU2006 license: 55


Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

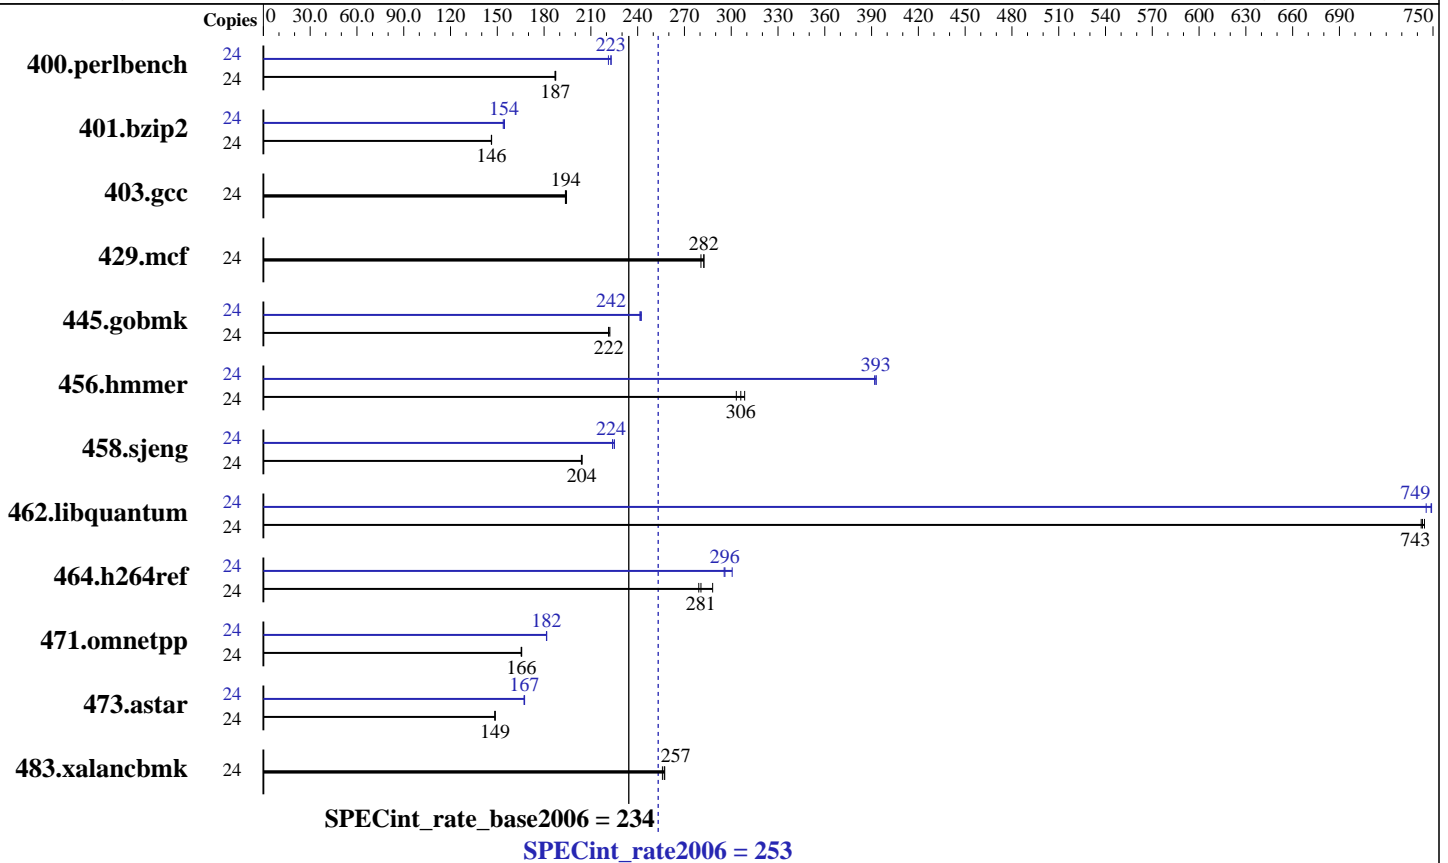

## Hardware

CPU Name: Intel Xeon L7545  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (32 x 4 GB DDR3-1066 QR RDIMM, CL7, ECC, downclocked to 978 MHz)  
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS 6Gb  
 Other Hardware: None

## Software

Operating System: Red Hat Linux Enterprise Linux 5 (x86\_64) Update 4 errata kernel (RHEL 5.4.z) kernel-2.6.18-164.9.1.el5.x86\_64  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 253

PowerEdge R910 (Intel Xeon L7545, 1.87 GHz)

SPECint\_rate\_base2006 = 234

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	1251	187	1254	187	<u>1252</u>	<u>187</u>	24	1060	221	1051	223	<u>1052</u>	<u>223</u>		
401.bzip2	24	1582	146	1584	146	<u>1584</u>	<u>146</u>	24	1498	155	1506	154	<u>1501</u>	<u>154</u>		
403.gcc	24	998	194	<u>997</u>	<u>194</u>	994	194	24	998	194	<u>997</u>	<u>194</u>	994	194		
429.mcf	24	775	283	780	281	<u>775</u>	<u>282</u>	24	775	283	780	281	<u>775</u>	<u>282</u>		
445.gobmk	24	1138	221	1133	222	<u>1136</u>	<u>222</u>	24	<u>1041</u>	<u>242</u>	1043	241	1039	242		
456.hammer	24	726	309	738	303	<u>731</u>	<u>306</u>	24	<u>570</u>	<u>393</u>	571	392	570	393		
458.sjeng	24	1422	204	1424	204	<u>1422</u>	<u>204</u>	24	1297	224	<u>1296</u>	<u>224</u>	1290	225		
462.libquantum	24	<u>669</u>	<u>743</u>	668	745	670	742	24	<u>664</u>	<u>749</u>	667	746	664	749		
464.h264ref	24	1844	288	<u>1893</u>	<u>281</u>	1902	279	24	1798	295	1767	301	<u>1795</u>	<u>296</u>		
471.omnetpp	24	907	165	<u>906</u>	<u>166</u>	906	166	24	826	182	<u>826</u>	<u>182</u>	826	182		
473.astar	24	1134	149	1135	148	<u>1134</u>	<u>149</u>	24	1006	168	<u>1007</u>	<u>167</u>	1008	167		
483.xalancbmk	24	<u>644</u>	<u>257</u>	647	256	643	257	24	<u>644</u>	<u>257</u>	647	256	643	257		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

vm.zone\_reclaim\_mode = 1 in /etc/sysctl.conf file  
BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R910 and  
the Bull NovaScale R480 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R910 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 253

PowerEdge R910 (Intel Xeon L7545, 1.87 GHz)

SPECint\_rate\_base2006 = 234

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 253

PowerEdge R910 (Intel Xeon L7545, 1.87 GHz)

SPECint\_rate\_base2006 = 234

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 253

PowerEdge R910 (Intel Xeon L7545, 1.87 GHz)

SPECint\_rate\_base2006 = 234

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:26:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2010.