



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 120

PRIMERGY BX922 S2, Intel Xeon L5609, 1.87 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

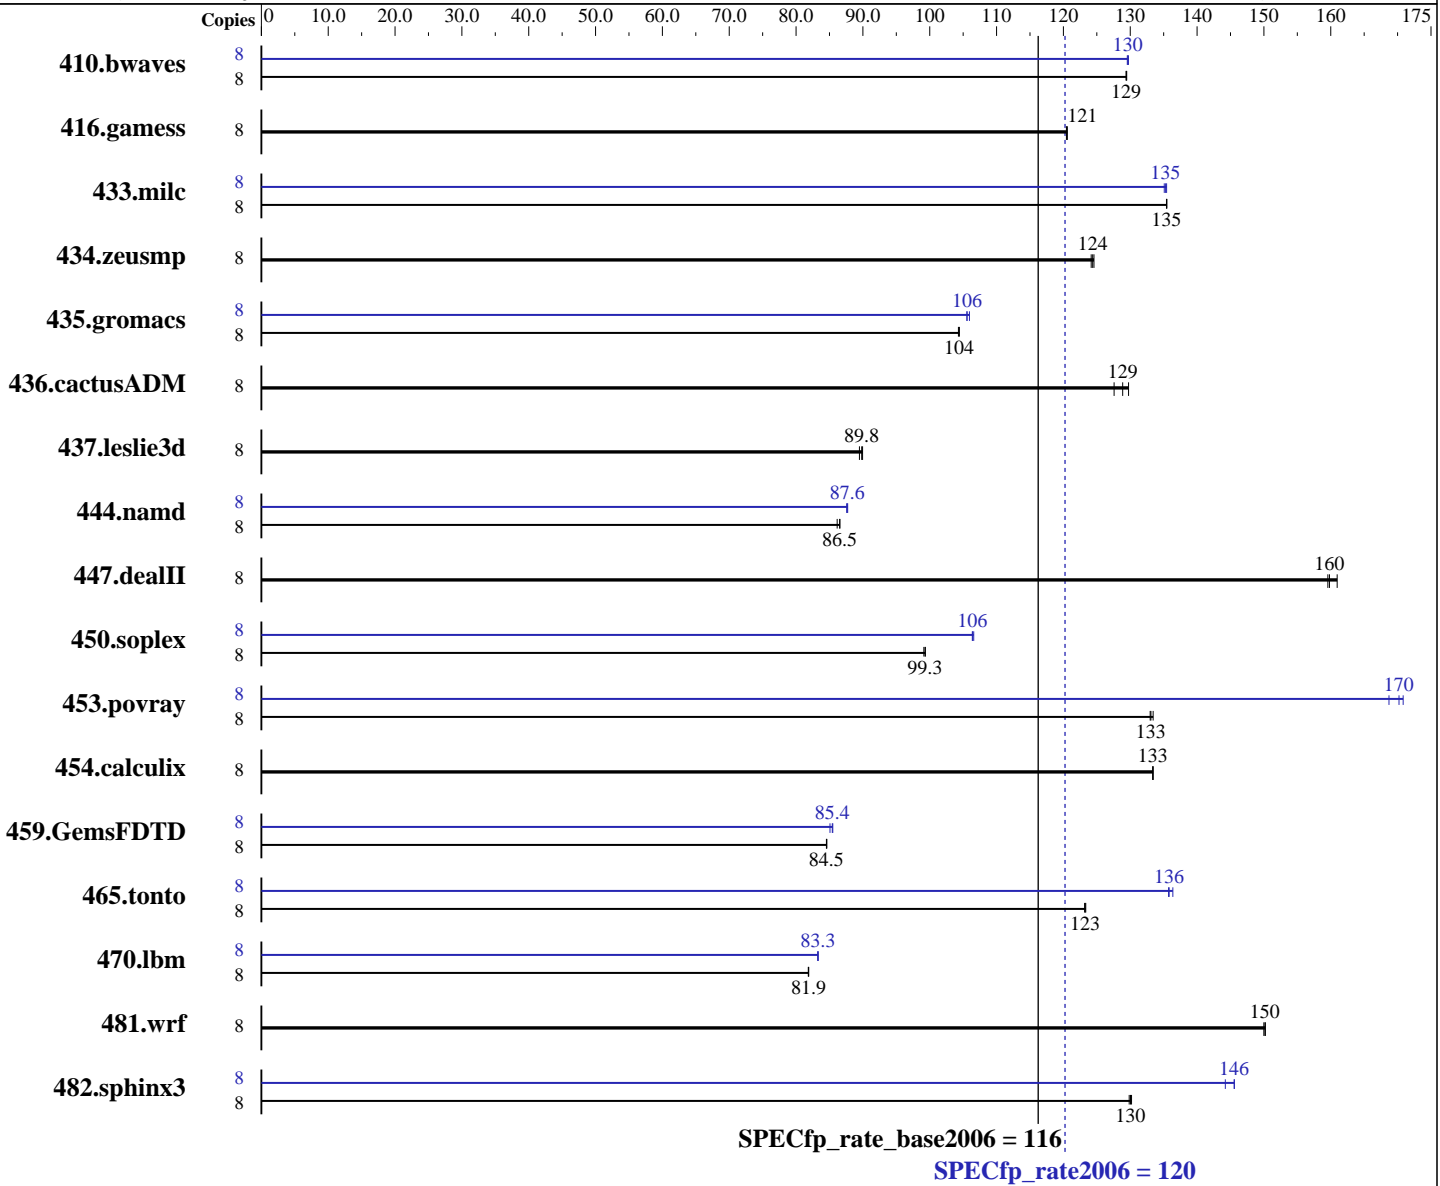

### Hardware

CPU Name: Intel Xeon L5609  
 CPU Characteristics:  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **120**

PRIMERGY BX922 S2, Intel Xeon L5609, 1.87 GHz

SPECfp\_rate\_base2006 = **116**

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
Disk Subsystem: 1 x SSD SATA, 64 GB  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	840	129	<b>840</b>	<b>129</b>	840	129	8	839	130	838	130	<b>839</b>	<b>130</b>
416.gamess	8	<b>1300</b>	<b>121</b>	1300	120	1299	121	8	<b>1300</b>	<b>121</b>	1300	120	1299	121
433.milc	8	542	135	542	135	<b>542</b>	<b>135</b>	8	<b>543</b>	<b>135</b>	542	135	544	135
434.zeusmp	8	584	125	586	124	<b>585</b>	<b>124</b>	8	584	125	586	124	<b>585</b>	<b>124</b>
435.gromacs	8	547	104	<b>547</b>	<b>104</b>	548	104	8	<b>541</b>	<b>106</b>	541	106	539	106
436.cactusADM	8	749	128	737	130	<b>742</b>	<b>129</b>	8	749	128	737	130	<b>742</b>	<b>129</b>
437.leslie3d	8	836	90.0	<b>837</b>	<b>89.8</b>	840	89.5	8	836	90.0	<b>837</b>	<b>89.8</b>	840	89.5
444.namd	8	745	86.2	741	86.6	<b>742</b>	<b>86.5</b>	8	733	87.6	731	87.7	<b>732</b>	<b>87.6</b>
447.dealII	8	574	160	569	161	<b>573</b>	<b>160</b>	8	574	160	569	161	<b>573</b>	<b>160</b>
450.soplex	8	672	99.3	673	99.1	<b>672</b>	<b>99.3</b>	8	626	107	627	106	<b>627</b>	<b>106</b>
453.povray	8	319	133	<b>320</b>	<b>133</b>	320	133	8	249	171	<b>250</b>	<b>170</b>	252	169
454.calculix	8	495	133	495	133	<b>495</b>	<b>133</b>	8	495	133	495	133	<b>495</b>	<b>133</b>
459.GemsFDTD	8	1004	84.5	1003	84.6	<b>1004</b>	<b>84.5</b>	8	<b>994</b>	<b>85.4</b>	993	85.5	998	85.1
465.tonto	8	<b>639</b>	<b>123</b>	638	123	639	123	8	577	136	580	136	<b>580</b>	<b>136</b>
470.lbm	8	1342	81.9	1343	81.8	<b>1343</b>	<b>81.9</b>	8	1320	83.3	<b>1320</b>	<b>83.3</b>	1321	83.2
481.wrf	8	<b>595</b>	<b>150</b>	595	150	596	150	8	<b>595</b>	<b>150</b>	595	150	596	150
482.sphinx3	8	<b>1199</b>	<b>130</b>	1198	130	1201	130	8	1081	144	1071	146	<b>1071</b>	<b>146</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 1067 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY BX922 S2, Intel Xeon L5609, 1.87 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2010  
Hardware Availability: Oct-2010  
Software Availability: Jan-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY BX922 S2, Intel Xeon L5609, 1.87 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 120**

PRIMERGY BX922 S2, Intel Xeon L5609, 1.87 GHz

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2010

**Hardware Availability:** Oct-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY BX922 S2, Intel Xeon L5609, 1.87 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:30:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.