



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 210

Acer AW2000h-AW175h F1 (AMD Opteron 6124 HE)

SPECfp_rate_base2006 = 190

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

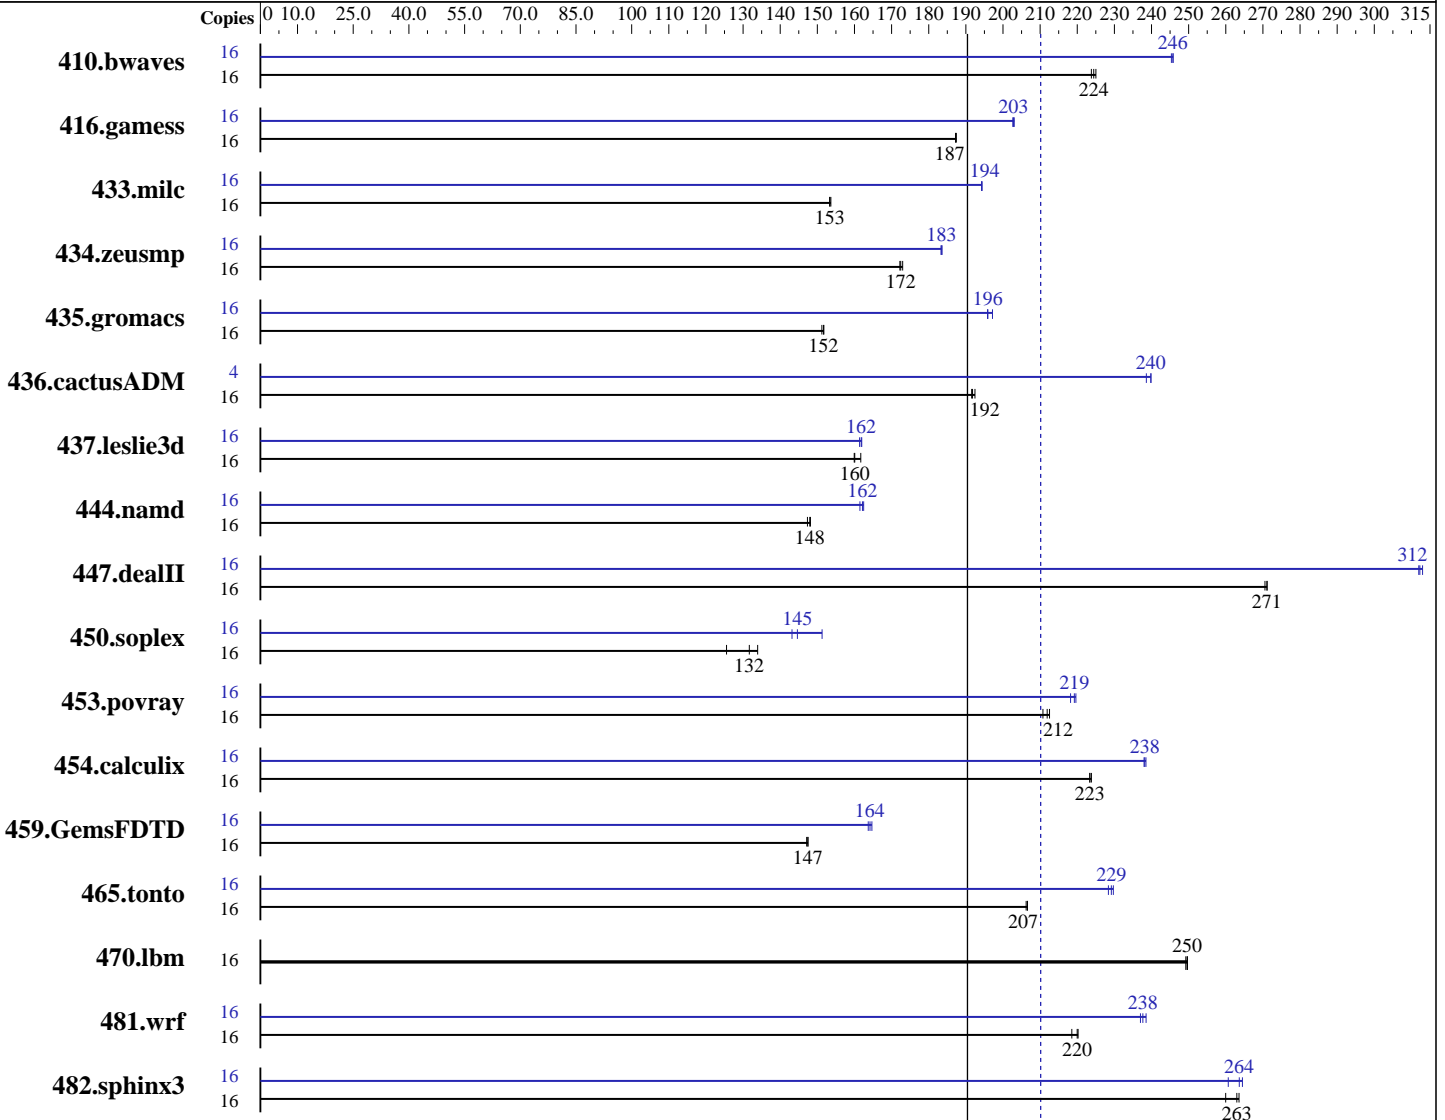

SPECfp_rate_base2006 = 190

SPECfp_rate2006 = 210

Hardware

CPU Name: AMD Opteron 6124 HE
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 210

Acer AW2000h-AW175h F1 (AMD Opteron 6124 HE)

SPECfp_rate_base2006 = 190

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2010
Hardware Availability: Aug-2010
Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB DDR3-1333 RDIMM)
Disk Subsystem: 1 x 320 GB SATA, 7200 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	972	224	<u>969</u>	<u>224</u>	966	225	16	886	245	885	246	<u>885</u>	<u>246</u>
416.gamess	16	1672	187	1673	187	<u>1673</u>	<u>187</u>	16	1543	203	<u>1545</u>	<u>203</u>	1546	203
433.milc	16	958	153	956	154	<u>958</u>	<u>153</u>	16	756	194	<u>756</u>	<u>194</u>	756	194
434.zeusmp	16	<u>844</u>	<u>172</u>	842	173	845	172	16	793	184	<u>794</u>	<u>183</u>	794	183
435.gromacs	16	753	152	755	151	<u>753</u>	<u>152</u>	16	579	197	583	196	<u>583</u>	<u>196</u>
436.cactusADM	16	<u>997</u>	<u>192</u>	993	192	998	192	4	200	239	<u>199</u>	<u>240</u>	199	240
437.leslie3d	16	940	160	<u>940</u>	<u>160</u>	930	162	16	929	162	<u>929</u>	<u>162</u>	932	161
444.namd	16	<u>867</u>	<u>148</u>	871	147	866	148	16	795	161	<u>791</u>	<u>162</u>	790	162
447.dealII	16	677	271	675	271	<u>675</u>	<u>271</u>	16	585	313	587	312	<u>586</u>	<u>312</u>
450.soplex	16	1063	126	<u>1013</u>	<u>132</u>	996	134	16	932	143	<u>923</u>	<u>145</u>	882	151
453.povray	16	<u>402</u>	<u>212</u>	400	213	404	211	16	388	220	<u>388</u>	<u>219</u>	390	218
454.calculix	16	591	223	590	224	<u>591</u>	<u>223</u>	16	555	238	553	238	<u>554</u>	<u>238</u>
459.GemsFDTD	16	1154	147	1151	147	<u>1151</u>	<u>147</u>	16	1037	164	1031	165	<u>1034</u>	<u>164</u>
465.tonto	16	763	206	762	207	<u>762</u>	<u>207</u>	16	685	230	<u>687</u>	<u>229</u>	689	228
470.lbm	16	882	249	<u>881</u>	<u>250</u>	880	250	16	882	249	<u>881</u>	<u>250</u>	880	250
481.wrf	16	818	219	812	220	<u>812</u>	<u>220</u>	16	754	237	<u>752</u>	<u>238</u>	749	239
482.sphinx3	16	1199	260	1183	264	<u>1186</u>	<u>263</u>	16	1196	261	1179	264	<u>1183</u>	<u>264</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 210

Acer AW2000h-AW175h F1 (AMD Opteron 6124 HE)

SPECfp_rate_base2006 = 190

CPU2006 license: 97

Test date: Jul-2010

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: May-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/usr/cpu2006/amd1002mc-rate-libs-revB/64:/usr/cpu2006/amd1002mc-rate-libs-revB/32"

OMP_NUM_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

This result was measured on the Gateway GW2000h-GW175h F1.

The Acer AW2000h-AW175h F1 and Gateway GW2000h-GW175h F1 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
openc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 210

Acer AW2000h-AW175h F1 (AMD Opteron 6124 HE)

SPECfp_rate_base2006 = 190

CPU2006 license: 97

Test date: Jul-2010

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: May-2010

Base Optimization Flags

C benchmarks:

`-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m`

C++ benchmarks:

`-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m`

Fortran benchmarks:

`-march=barcelona -mso -Ofast -HP`

Benchmarks using both Fortran and C:

`-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP`

Peak Compiler Invocation

C benchmarks:

`opencc`

C++ benchmarks:

`openCC`

Fortran benchmarks:

`openf95`

Benchmarks using both Fortran and C:

`opencc openf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 210

Acer AW2000h-AW175h F1 (AMD Opteron 6124 HE)

SPECfp_rate_base2006 = 190

CPU2006 license: 97

Test date: Jul-2010

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: May-2010

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 210

Acer AW2000h-AW175h F1 (AMD Opteron 6124 HE)

SPECfp_rate_base2006 = 190

CPU2006 license: 97

Test date: Jul-2010

Test sponsor: Acer Incorporated

Hardware Availability: Aug-2010

Tested by: Acer Incorporated

Software Availability: May-2010

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.20100721.html>
<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.20100721.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:39:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 August 2010.