SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.27 GHz, Intel Xeon X7560)

SPECint®_rate2006 = 757

SPECint_rate_base2006 = 703

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2010
Hardware Availability: Jun-2010
Software Availability: Mar-2010

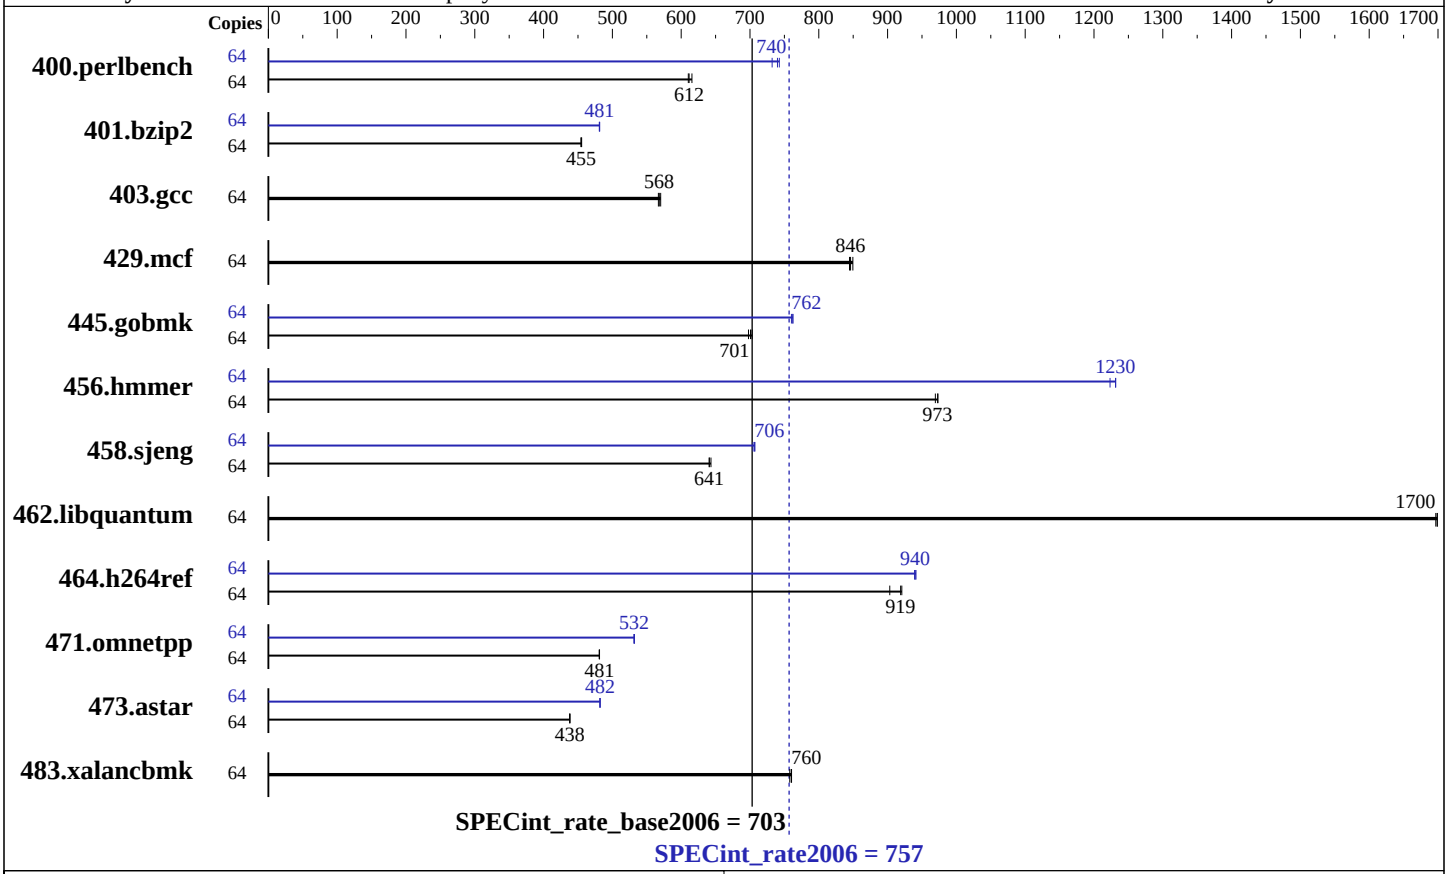

Hardware

CPU Name:	Intel Xeon X7560
CPU Characteristics:	Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	24 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (64 x 16 GB 4Rx4 PC3-8500R CL7)
Disk Subsystem:	2 x 146 GB 15 K SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.5 Advanced Platform, Kernel 2.6.18-194.el5
Compiler:	Intel C++ Compiler 11.1 for Linux Build 20090827 Package ID: l_cproc_p_11.1.056
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.17.50.0.6-12.el5

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.27 GHz, Intel Xeon X7560)

SPECint_rate2006 = 757

SPECint_rate_base2006 = 703

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2010
Hardware Availability: Jun-2010
Software Availability: Mar-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	**1023**	**612**	1024	610	1016	616	64	**845**	**740**	842	743	854	732
401.bzip2	64	1356	455	**1359**	**455**	1359	454	64	1283	481	**1283**	**481**	1284	481
403.gcc	64	**907**	**568**	904	570	909	567	64	**907**	**568**	904	570	909	567
429.mcf	64	**690**	**846**	691	845	687	850	64	**690**	**846**	691	845	687	850
445.gobmk	64	962	698	**958**	**701**	955	703	64	883	760	**881**	**762**	881	762
456.hmmer	64	616	969	614	973	**614**	**973**	64	488	1220	485	1230	**485**	**1230**
458.sjeng	64	1209	641	**1208**	**641**	1204	643	64	**1096**	**706**	1099	704	1095	707
462.libquantum	64	**781**	**1700**	781	1700	782	1700	64	**781**	**1700**	781	1700	782	1700
464.h264ref	64	1538	921	**1541**	**919**	1568	903	64	1508	939	1505	941	**1506**	**940**
471.omnetpp	64	831	481	832	481	**831**	**481**	64	**752**	**532**	752	532	753	531
473.astar	64	**1025**	**438**	1025	438	1026	438	64	**932**	**482**	932	482	932	482
483.xalancbmk	64	**581**	**760**	583	758	581	760	64	**581**	**760**	583	758	581	760

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
 Power Profile set to Maximum Performance
 Thermal Configuration set to Increased Cooling
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.1/056/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.1/056/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.1/056/bin/intel64/icc

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.html`
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.xml`
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:50:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.