



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon L5640)

**SPECfp®\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 193**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

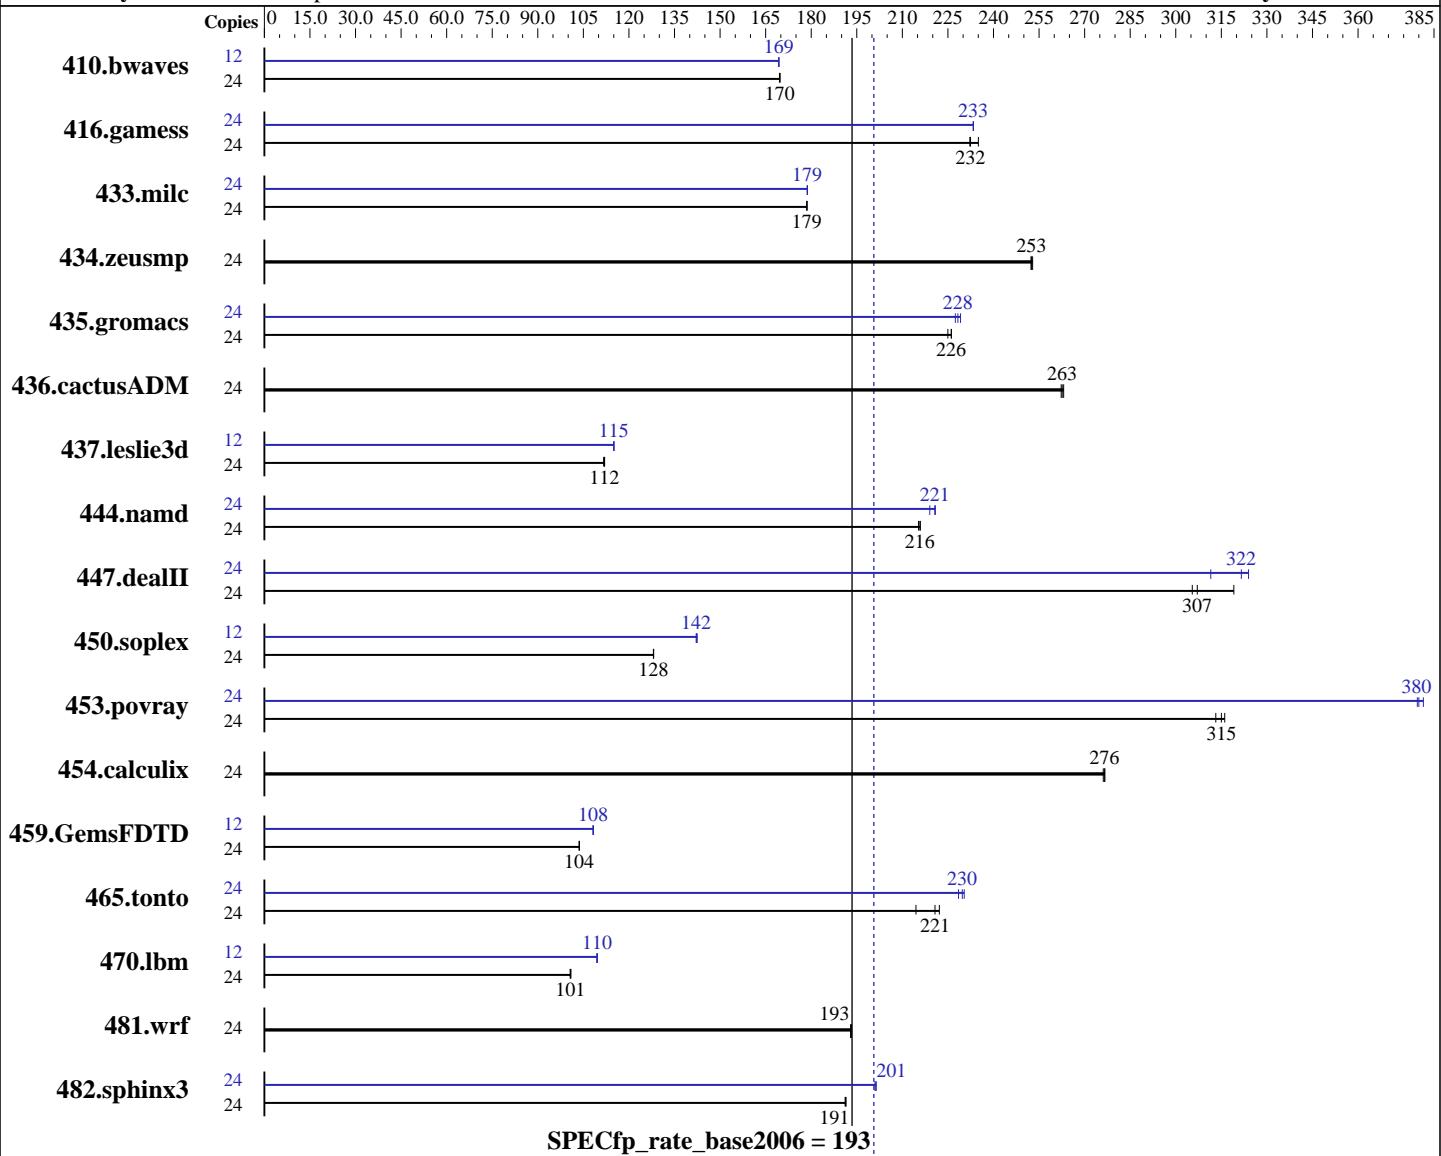

CPU Name: Intel Xeon L5640  
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
CPU MHz: 2267  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Hardware

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

### Software

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon L5640)

**SPECfp\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB PC3L-10600R, 2 rank, CL9, ECC)  
Disk Subsystem: 1x160 GB SATA, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>1923</b>	<b>170</b>	1924	170	1921	170	12	963	169	<b>963</b>	<b>169</b>	963	169
416.gamess	24	2024	232	<b>2022</b>	<b>232</b>	1999	235	24	2013	233	2014	233	<b>2014</b>	<b>233</b>
433.milc	24	1234	179	1234	179	<b>1234</b>	<b>179</b>	24	1233	179	1233	179	<b>1233</b>	<b>179</b>
434.zeusmp	24	<b>865</b>	<b>253</b>	866	252	864	253	24	<b>865</b>	<b>253</b>	866	252	864	253
435.gromacs	24	758	226	<b>758</b>	<b>226</b>	762	225	24	<b>751</b>	<b>228</b>	748	229	753	227
436.cactusADM	24	<b>1092</b>	<b>263</b>	1093	262	1090	263	24	<b>1092</b>	<b>263</b>	1093	262	1090	263
437.leslie3d	24	2014	112	2020	112	<b>2015</b>	<b>112</b>	12	981	115	980	115	<b>980</b>	<b>115</b>
444.namd	24	<b>892</b>	<b>216</b>	894	215	891	216	24	871	221	879	219	<b>872</b>	<b>221</b>
447.dealII	24	<b>894</b>	<b>307</b>	860	319	899	305	24	881	312	<b>854</b>	<b>322</b>	848	324
450.soplex	24	1562	128	<b>1562</b>	<b>128</b>	1563	128	12	<b>704</b>	<b>142</b>	702	142	704	142
453.povray	24	408	313	<b>405</b>	<b>315</b>	404	316	24	335	382	<b>336</b>	<b>380</b>	336	380
454.calculix	24	717	276	716	277	<b>716</b>	<b>276</b>	24	717	276	716	277	<b>716</b>	<b>276</b>
459.GemsFDTD	24	2457	104	<b>2457</b>	<b>104</b>	2456	104	12	<b>1176</b>	<b>108</b>	1177	108	1176	108
465.tonto	24	1063	222	1101	214	<b>1070</b>	<b>221</b>	24	1034	228	1025	230	<b>1028</b>	<b>230</b>
470.lbm	24	3268	101	<b>3274</b>	<b>101</b>	3275	101	12	1504	110	<b>1505</b>	<b>110</b>	1507	109
481.wrf	24	1389	193	<b>1389</b>	<b>193</b>	1387	193	24	1389	193	<b>1389</b>	<b>193</b>	1387	193
482.sphinx3	24	<b>2446</b>	<b>191</b>	2443	191	2447	191	24	2323	201	<b>2324</b>	<b>201</b>	2327	201

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
Performance/Watt: Traditional  
Memory Voltage: Normal



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon L5640)

**SPECfp\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 9006

**Test date:** Jul-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2010

**Tested by:** NEC Corporation

**Software Availability:** Dec-2009

## General Notes

The Express5800/R120b-1 and  
the Express5800/R120b-2 models are electronically equivalent.  
The results have been measured on the Express5800/R120b-1 model.

## Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
    433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
    444.namd: `-DSPEC_CPU_LP64`  
    447.dealII: `-DSPEC_CPU_LP64`  
    450.soplex: `-DSPEC_CPU_LP64`  
    453.povray: `-DSPEC_CPU_LP64`  
    454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
    465.tonto: `-DSPEC_CPU_LP64`  
    470.lbm: `-DSPEC_CPU_LP64`  
    481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon L5640)

**SPECfp\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon L5640)

**SPECfp\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -opt-prefetch
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3 -ansi-alias -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -ansi-alias -scalar-rep-
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Obo -ansi-alias -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static
```

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Obo
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon L5640)

**SPECfp\_rate2006 = 201**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 9006

**Test date:** Jul-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2010

**Tested by:** NEC Corporation

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100823.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100823.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:31:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 August 2010.