



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 492

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = 447

CPU2006 license: 11


Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

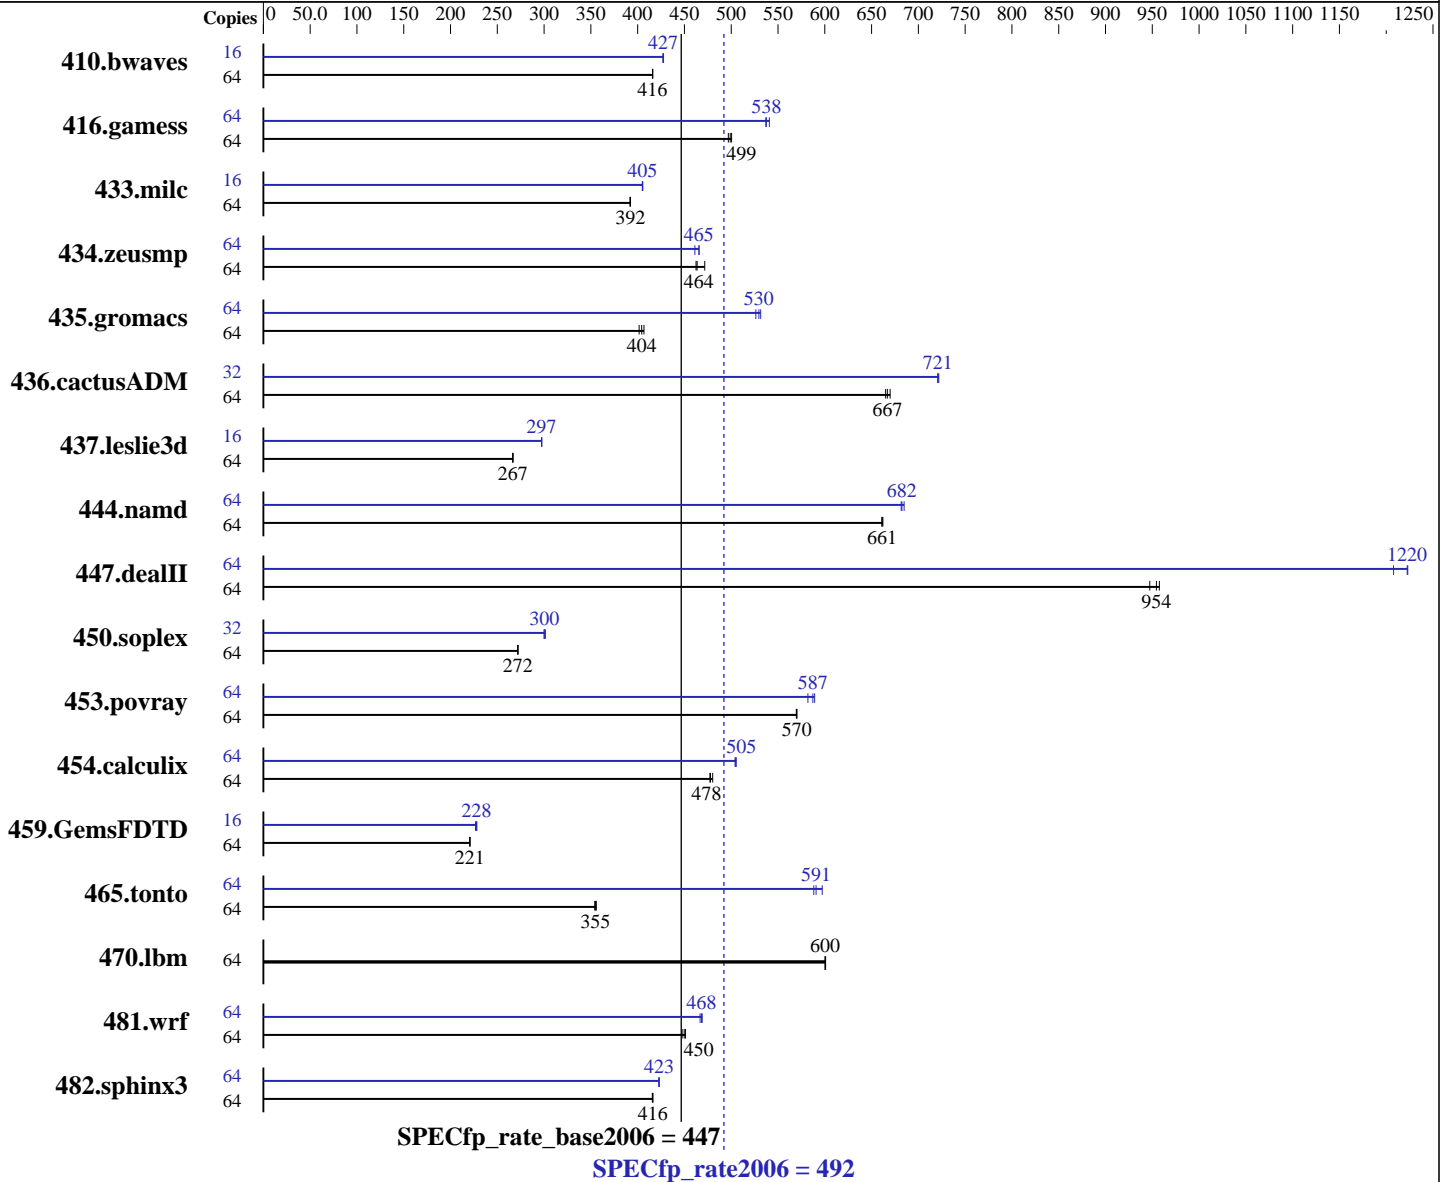

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz
 CPU MHz: 3556
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 16 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (ppc64), Kernel 2.6.32.12-0.7-ppc64
 Compiler: IBM XL C/C++ for Linux, V11.1
 IBM XL Fortran for Linux, V13.1
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **492**

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = **447**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2010
Hardware Availability: Sep-2010
Software Availability: Aug-2010

Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 256 GB (32x8 GB) DDR3 1066 MHz
Disk Subsystem: 2x146.8 GB SAS SFF 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3
-MicroQuill SmartHeap 9
-Apache C++ Standard Library V4.2.1

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	2090	416	2091	416	<u>2091</u>	<u>416</u>	16	509	427	<u>509</u>	<u>427</u>	508	428		
416.gamess	64	2522	497	2504	500	<u>2512</u>	<u>499</u>	64	2334	537	<u>2331</u>	<u>538</u>	2317	541		
433.milc	64	<u>1498</u>	<u>392</u>	1500	392	1497	392	16	363	405	<u>363</u>	<u>405</u>	362	406		
434.zeusmp	64	1235	472	1259	462	<u>1256</u>	<u>464</u>	64	<u>1251</u>	<u>465</u>	1263	461	1251	466		
435.gromacs	64	<u>1130</u>	<u>404</u>	1138	402	1123	407	64	<u>863</u>	<u>530</u>	860	531	868	526		
436.cactusADM	64	1150	665	1142	670	<u>1147</u>	<u>667</u>	32	531	721	<u>530</u>	<u>721</u>	530	722		
437.leslie3d	64	<u>2257</u>	<u>267</u>	2256	267	2257	267	16	<u>506</u>	<u>297</u>	505	298	506	297		
444.namd	64	<u>776</u>	<u>661</u>	776	661	775	662	64	750	685	753	682	<u>752</u>	<u>682</u>		
447.dealII	64	765	958	<u>767</u>	<u>954</u>	773	947	64	599	1220	<u>599</u>	<u>1220</u>	606	1210		
450.soplex	64	1962	272	1964	272	<u>1962</u>	<u>272</u>	32	<u>889</u>	<u>300</u>	886	301	890	300		
453.povray	64	597	570	598	570	<u>597</u>	<u>570</u>	64	585	582	<u>580</u>	<u>587</u>	578	589		
454.calculix	64	1106	477	<u>1105</u>	<u>478</u>	1100	480	64	1045	505	1047	504	<u>1046</u>	<u>505</u>		
459.GemsFDTD	64	<u>3076</u>	<u>221</u>	3076	221	3079	221	16	749	227	<u>745</u>	<u>228</u>	744	228		
465.tonto	64	1778	354	<u>1774</u>	<u>355</u>	1770	356	64	<u>1066</u>	<u>591</u>	1071	588	1054	597		
470.lbm	64	1465	600	1463	601	<u>1464</u>	<u>600</u>	64	1465	600	1463	601	<u>1464</u>	<u>600</u>		
481.wrf	64	1598	447	<u>1590</u>	<u>450</u>	1585	451	64	1524	469	<u>1527</u>	<u>468</u>	1532	467		
482.sphinx3	64	3001	416	2997	416	<u>2998</u>	<u>416</u>	64	2949	423	<u>2950</u>	<u>423</u>	2951	423		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for:
433.milc 435.gromacs 450.soplex 482.sphinx3
with options -O4 -nodp
434.zeusmp
with options -O4 -vrox -nodp
437.leslie3d 444.namd
with options -O3 -lu -l -nodp -sdp 9
465.tonto
with options -O4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 492

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = 447

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

Submit Notes

The config file option 'submit' was used.
Benchmarks bound to a processor using numactl on the submit command.

Operating System Notes

ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
echo 4224 > /proc/sys/vm/nr_hugepages
The following environment variables were set before the runspec command:
export XLFRTIOPTS=intrinthds=1
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export HUGETLB_ELFMAP=RW

General Notes

447.dealIII (peak): "apache_stdccxx_4_2_1" src.alt was used.
447.dealIII (base): "apache_stdccxx_4_2_1" src.alt was used.

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdccxx.apache.org/download.html> using:
gmake BUILDTYPE=8d CONFIG=gcc.config

Base Compiler Invocation

C benchmarks:
xlc -qlanglvl=extc99

C++ benchmarks:
xlC

Fortran benchmarks:
xlf95

Benchmarks using both Fortran and C:
xlc -qlanglvl=extc99 xlf95

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 492

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = 447

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

Base Portability Flags (Continued)

437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

C++ benchmarks:

-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lhugetlbfs

Fortran benchmarks:

-O5 -qarch=pwr7 -qtune=pwr7 -qsmallstack=dynlenonheap -qalias=nostd
-lhugetlbfs

Benchmarks using both Fortran and C:

-O5 -qarch=pwr7 -qtune=pwr7 -qsmallstack=dynlenonheap -qalias=nostd
-lhugetlbfs

Base Other Flags

C benchmarks:

-qipa=threads

C++ benchmarks:

-qipa=threads

Fortran benchmarks:

-qipa=threads

Benchmarks using both Fortran and C:

-qipa=threads

Peak Compiler Invocation

C benchmarks:

xlC -qlanglvl=extc99

C++ benchmarks:

xlC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 492

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = 447

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

Peak Compiler Invocation (Continued)

Fortran benchmarks:

xlf95

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 xlf95

Peak Portability Flags

410.bwaves: -qfixed
 416.gamess: -qfixed
 434.zeusmp: -qfixed
 435.gromacs: -qfixed -qextname
 436.cactusADM: -qfixed -qextname
 437.leslie3d: -qfixed
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -qfixed -qextname
 481.wrf: -DNOUNDERSCORE
 482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -Wl, -q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

470.lbm: basepeak = yes

482.sphinx3: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs

C++ benchmarks:

444.namd: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs

447.dealIII: -O4 -qarch=pwr7 -qtune=pwr7 -qrtti
-qcpp_stdinc=/autobench/sources/stdcxx-4.2.1/dist/include/ansi:/autobench/sources/stdcxx-4.2.1/dist/include
-lsmartheap -L/autobench/sources/stdcxx-4.2.1/dist/lib
-R/autobench/sources/stdcxx-4.2.1/dist/lib -lstl8d

450.soplex: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs

453.povray: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -qsimd -q64 -lsmartheap64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 492

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = 447

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7 -qtune=pwr7
-qsmallstack=dynlenonheap -q64 -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7 -qtune=pwr7
-qalias=nostd -lhugetlbfs

434.zeusmp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -qalias=nostd -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-align

437.leslie3d: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -q64
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

459.GemsFDTD: -O4 -qarch=pwr7 -qtune=pwr7 -qsimd
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

465.tonto: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -qsimd -lhugetlbfs

Benchmarks using both Fortran and C:

435.gromacs: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -qsimd -lhugetlbfs

436.cactusADM: -O5 -qarch=pwr7 -qtune=pwr7 -qnostrict
-qsmallstack=dynlenonheap -qalias=nostd -lhugetlbfs

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7 -qtune=pwr7
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

481.wrf: -O3 -qarch=pwr7 -qtune=pwr7 -q64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-qipa=threads

C++ benchmarks:

-qipa=threads

Fortran benchmarks:

-qipa=threads

Benchmarks using both Fortran and C:

-qipa=threads



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 492

IBM Power 740 Express (3.55 GHz, 16 core, SLES)

SPECfp_rate_base2006 = 447

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:13:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.