



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp®_rate2006 = 175

Tyan YR190B8228, AMD Opteron 4180

SPECfp_rate_base2006 = 162

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jul-2010

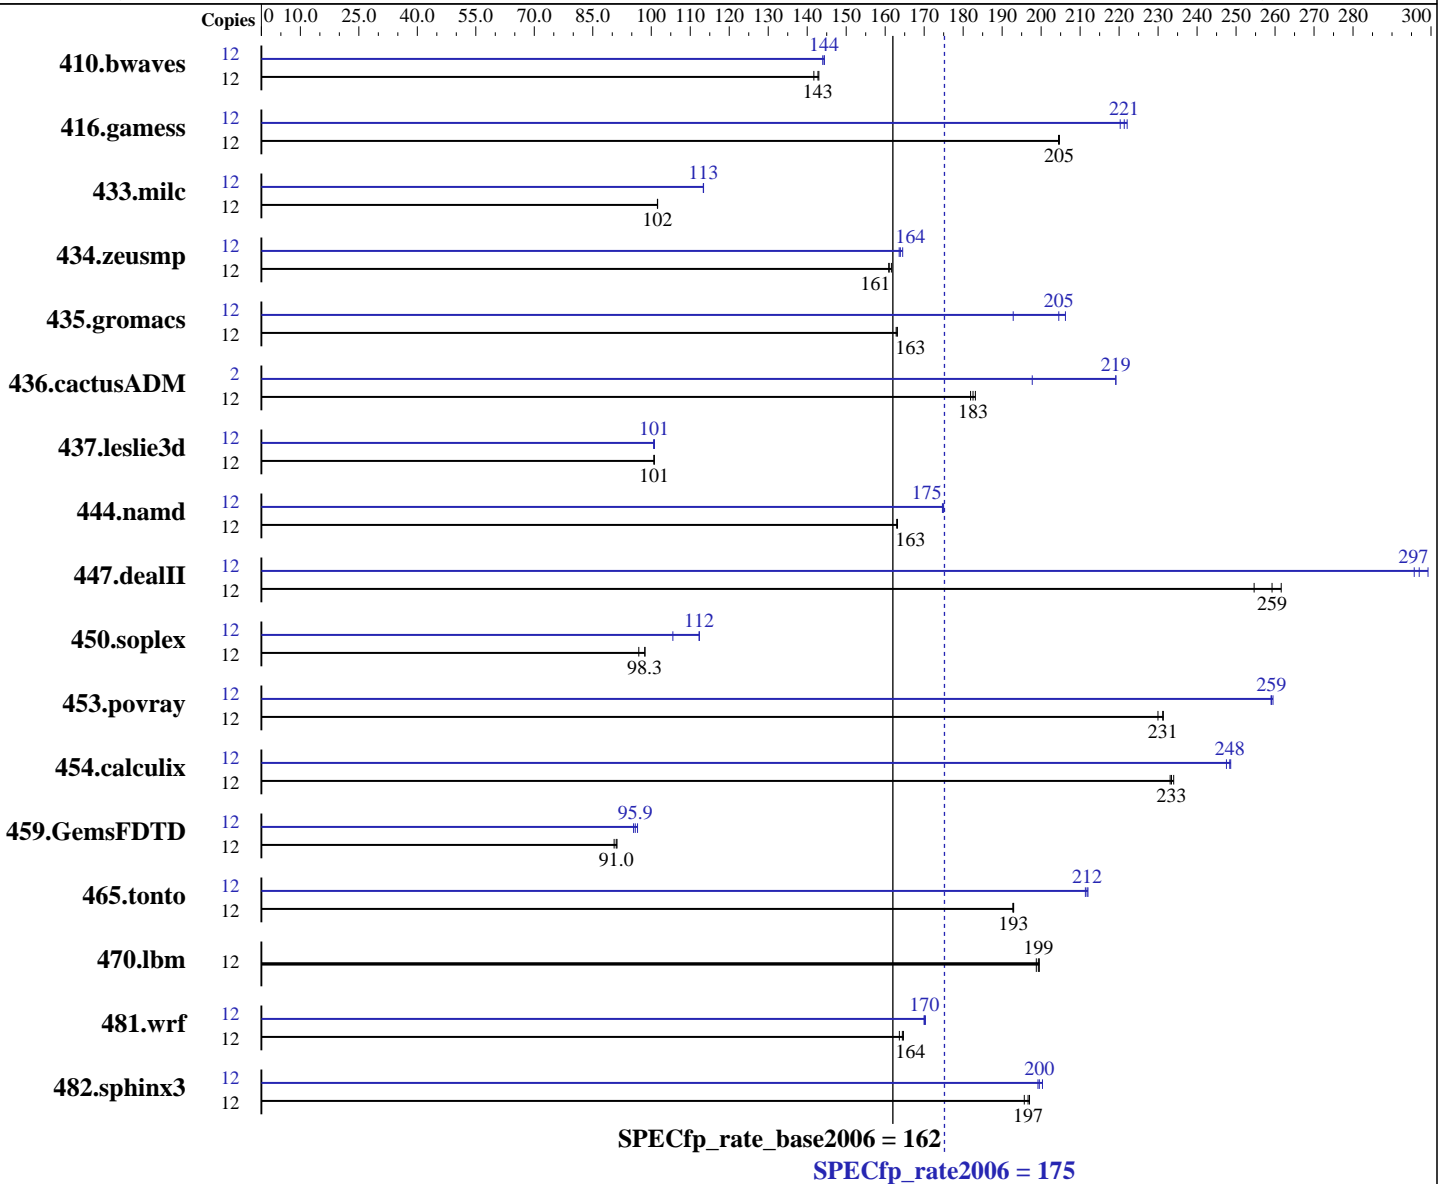

Hardware

CPU Name: AMD Opteron 4180
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 175

Tyan YR190B8228, AMD Opteron 4180

SPECfp_rate_base2006 = 162

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jul-2010

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB, DDR3-1333, CL9, Reg, Dual Rank)
Disk Subsystem: 1 x 128 GB SATA SSD,
Western Digital SiliconEdge Blue SSC-D0128SC-2100
Other Hardware: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	12	1151	142	1140	143	1142	143	12	1133	144	1129	144	1130	144		
416.gamess	12	1149	204	1148	205	1148	205	12	1062	221	1067	220	1058	222		
433.milc	12	1084	102	1085	102	1084	102	12	971	113	972	113	972	113		
434.zeusmp	12	679	161	678	161	676	162	12	668	164	664	164	666	164		
435.gromacs	12	526	163	525	163	525	163	12	444	193	419	205	415	206		
436.cactusADM	12	783	183	788	182	786	183	2	109	219	121	198	109	219		
437.leslie3d	12	1120	101	1120	101	1120	101	12	1119	101	1121	101	1120	101		
444.namd	12	590	163	590	163	590	163	12	551	175	551	175	550	175		
447.dealII	12	525	262	530	259	539	255	12	464	296	459	299	462	297		
450.soplex	12	1034	96.8	1017	98.4	1018	98.3	12	948	106	891	112	891	112		
453.povray	12	276	231	278	230	276	231	12	247	259	246	259	246	259		
454.calculix	12	425	233	424	233	423	234	12	400	248	398	249	399	248		
459.GemsFDTD	12	1396	91.2	1407	90.5	1399	91.0	12	1334	95.5	1320	96.5	1328	95.9		
465.tonto	12	612	193	612	193	613	193	12	558	212	559	211	557	212		
470.lbm	12	830	199	827	199	826	200	12	830	199	827	199	826	200		
481.wrf	12	815	164	814	165	819	164	12	789	170	787	170	788	170		
482.sphinx3	12	1187	197	1189	197	1195	196	12	1172	200	1174	199	1167	200		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 175

Tyan YR190B8228, AMD Opteron 4180

SPECfp_rate_base2006 = 162

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jul-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002li-rate-libs-revC/64:/root/work/cpu2006/amd1002li-rate-libs-revC/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 175

Tyan YR190B8228, AMD Opteron 4180

SPECfp_rate_base2006 = 162

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jul-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdtd=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdtd=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdtd=2m -HP

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 175

Tyan YR190B8228, AMD Opteron 4180

SPECfp_rate_base2006 = 162

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jul-2010

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 175

Tyan YR190B8228, AMD Opteron 4180

SPECfp_rate_base2006 = 162

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:16:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 August 2010.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 6