



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


SPECint®2006 = 24.6

IBM System x3690 X5 (Intel Xeon E7530)

SPECint_base2006 = 22.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2010
Hardware Availability: Aug-2010
Software Availability: Jan-2010

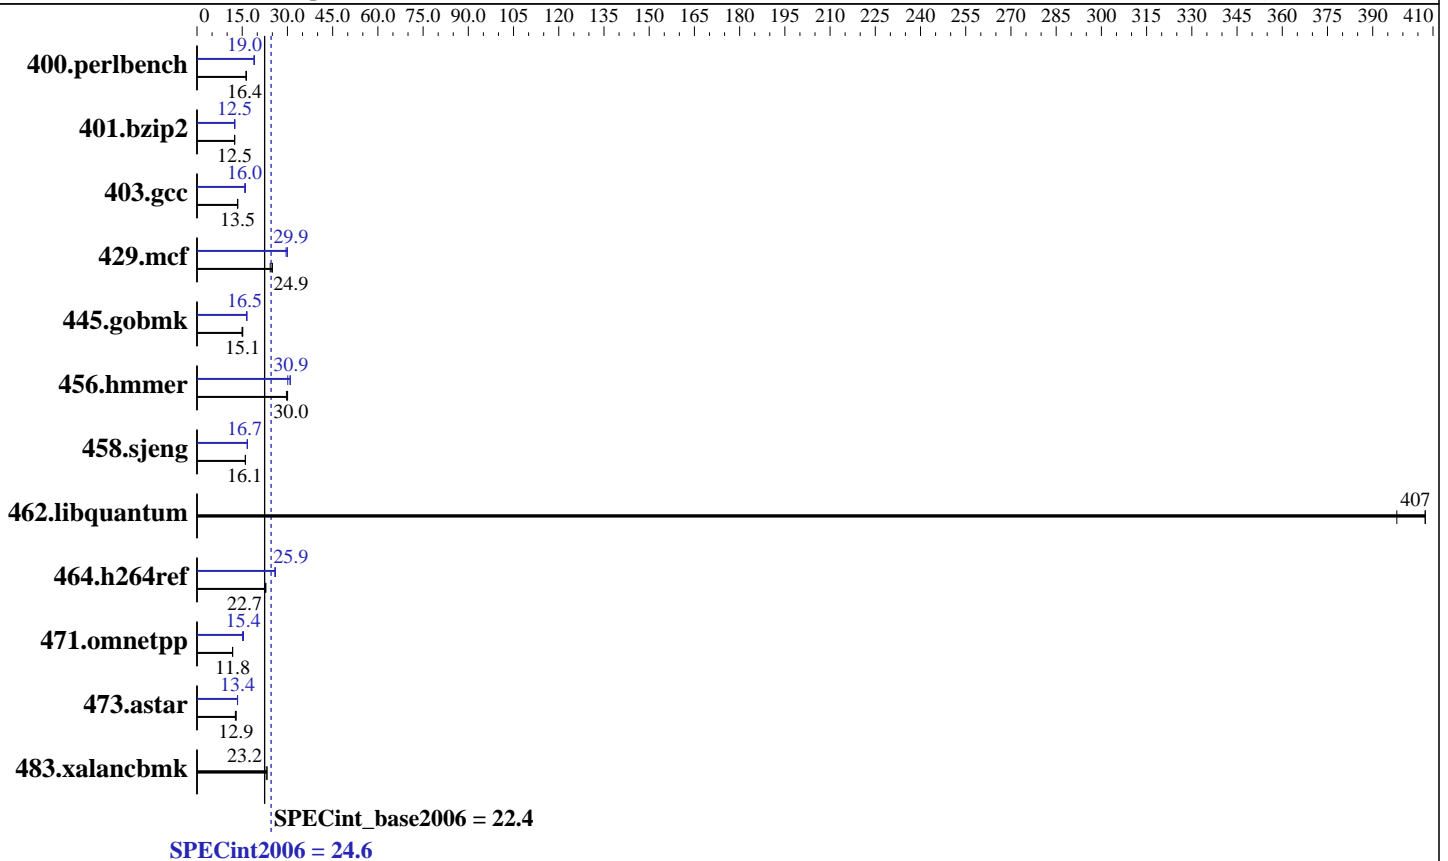

Hardware

CPU Name: Intel Xeon E7530
CPU Characteristics: Intel Turbo Boost Technology up to 2.13 GHz
CPU MHz: 1867
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (32 x 4 GB PC3-8500R CL7, Quad Rank, running at 978 MHz)
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 24.6

IBM System x3690 X5 (Intel Xeon E7530)

SPECint_base2006 = 22.4

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	601	16.2	595	16.4	<u>597</u>	<u>16.4</u>	<u>515</u>	<u>19.0</u>	517	18.9	512	19.1
401.bzip2	771	12.5	<u>774</u>	<u>12.5</u>	775	12.5	768	12.6	<u>772</u>	<u>12.5</u>	774	12.5
403.gcc	599	13.4	<u>598</u>	<u>13.5</u>	595	13.5	<u>505</u>	<u>16.0</u>	507	15.9	502	16.0
429.mcf	<u>366</u>	<u>24.9</u>	375	24.3	364	25.0	304	30.0	309	29.5	<u>305</u>	<u>29.9</u>
445.gobmk	691	15.2	<u>694</u>	<u>15.1</u>	702	14.9	636	16.5	635	16.5	<u>636</u>	<u>16.5</u>
456.hammer	310	30.0	<u>311</u>	<u>30.0</u>	314	29.7	<u>302</u>	<u>30.9</u>	310	30.1	302	30.9
458.sjeng	<u>753</u>	<u>16.1</u>	755	16.0	753	16.1	723	16.7	<u>725</u>	<u>16.7</u>	726	16.7
462.libquantum	50.9	407	52.1	398	<u>50.9</u>	<u>407</u>	50.9	407	52.1	398	<u>50.9</u>	<u>407</u>
464.h264ref	969	22.8	<u>973</u>	<u>22.7</u>	973	22.7	855	25.9	852	26.0	<u>854</u>	<u>25.9</u>
471.omnetpp	529	11.8	<u>530</u>	<u>11.8</u>	530	11.8	406	15.4	<u>406</u>	<u>15.4</u>	413	15.1
473.astar	552	12.7	<u>544</u>	<u>12.9</u>	541	13.0	523	13.4	521	13.5	<u>522</u>	<u>13.4</u>
483.xalancbmk	297	23.2	307	22.5	<u>298</u>	<u>23.2</u>	297	23.2	307	22.5	<u>298</u>	<u>23.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

```
Turbo Boost set to Traditional
```

General Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

```
C benchmarks:
  icc -m64

C++ benchmarks:
  icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 24.6

IBM System x3690 X5 (Intel Xeon E7530)

SPECint_base2006 = 22.4

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 24.6

IBM System x3690 X5 (Intel Xeon E7530)

SPECint_base2006 = 22.4

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation (Continued)

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation SPECint2006 = 24.6

IBM System x3690 X5 (Intel Xeon E7530) SPECint_base2006 = 22.4

CPU2006 license: 11	Test date: Jul-2010
Test sponsor: IBM Corporation	Hardware Availability: Aug-2010
Tested by: IBM Corporation	Software Availability: Jan-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:06:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.