SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS22 (Intel Xeon L5638)

SPECint®_rate2006 = 264

SPECint_rate_base2006 = 247

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Aug-2010
Software Availability: Jan-2010

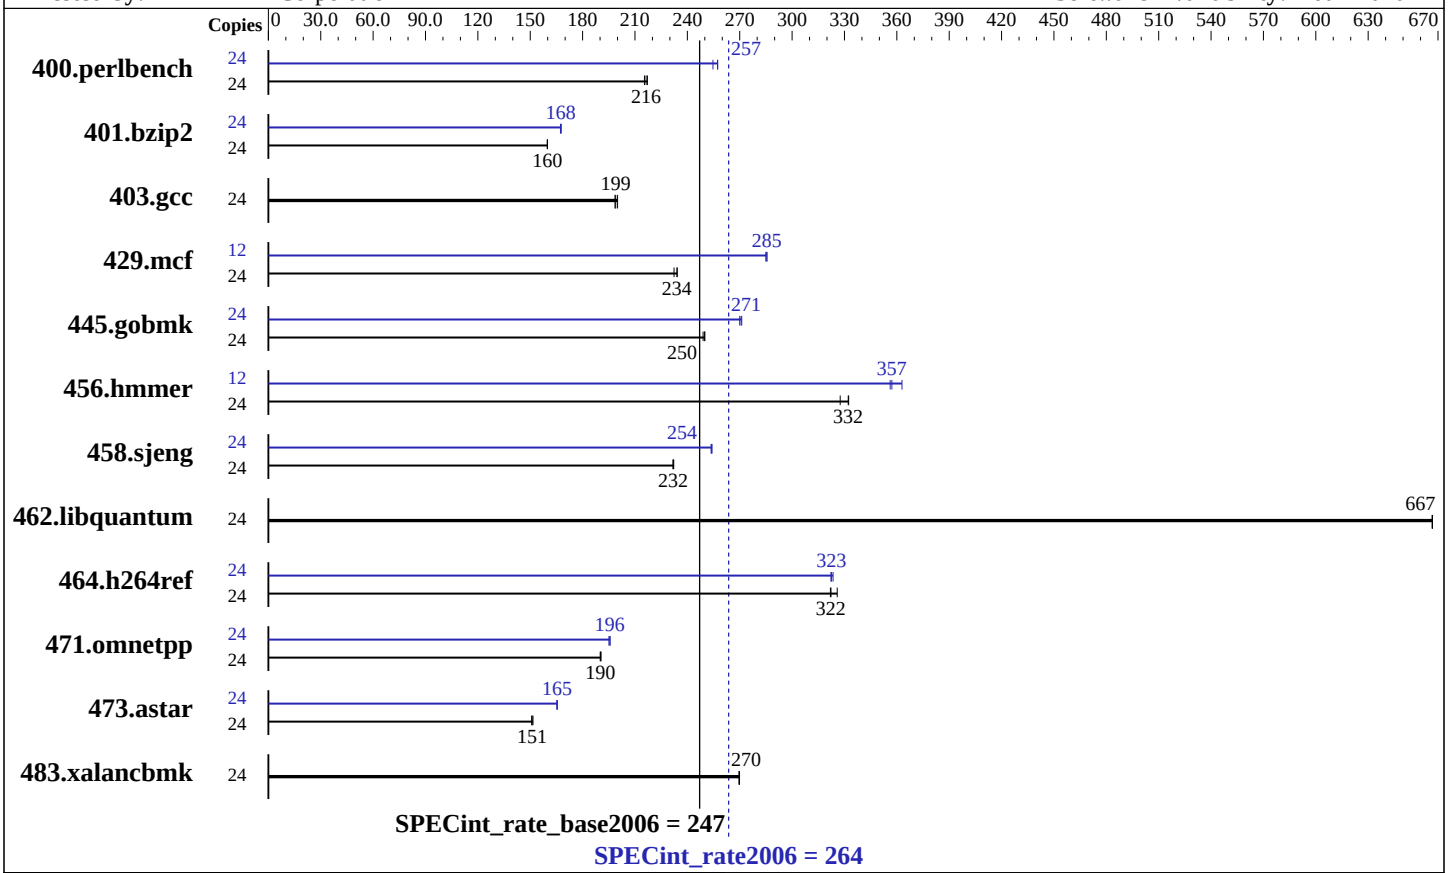

Hardware

CPU Name:	Intel Xeon L5638
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
Disk Subsystem:	1 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS22 (Intel Xeon L5638)

SPECint_rate2006 = 264

SPECint_rate_base2006 = 247

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Aug-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	1088	215	1080	217	**1084**	**216**	24	911	257	921	255	**911**	**257**
401.bzip2	24	1450	160	1449	160	**1449**	**160**	24	1384	167	1381	168	**1382**	**168**
403.gcc	24	966	200	973	199	**971**	**199**	24	966	200	973	199	**971**	**199**
429.mcf	24	942	232	935	234	**935**	**234**	12	384	285	**383**	**285**	383	286
445.gobmk	24	1007	250	**1007**	**250**	1011	249	24	928	271	933	270	**930**	**271**
456.hmmer	24	674	332	**674**	**332**	684	328	12	**313**	**357**	308	363	314	356
458.sjeng	24	**1252**	**232**	1253	232	1251	232	24	**1144**	**254**	1143	254	1145	254
462.libquantum	24	**746**	**667**	746	667	746	667	24	**746**	**667**	746	667	746	667
464.h264ref	24	1630	326	1650	322	**1648**	**322**	24	1642	323	**1646**	**323**	1648	322
471.omnetpp	24	789	190	**788**	**190**	787	191	24	766	196	**767**	**196**	769	195
473.astar	24	**1115**	**151**	1117	151	1112	152	24	1018	165	1019	165	**1018**	**165**
483.xalancbmk	24	614	270	614	270	**614**	**270**	24	614	270	614	270	**614**	**270**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Platform Notes

```
 Turbo Mode enabled
 Turbo Boost set to Traditional
 Power C-states enabled
 Demand Scrub disabled
```

General Notes

```
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:25:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.