



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 6150**

**IBM Power 795 (4.25 GHz, 128 core)**

**SPECint\_rate\_base2006 = 5330**

**CPU2006 license:** 11


**Test date:** Aug-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Sep-2010

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

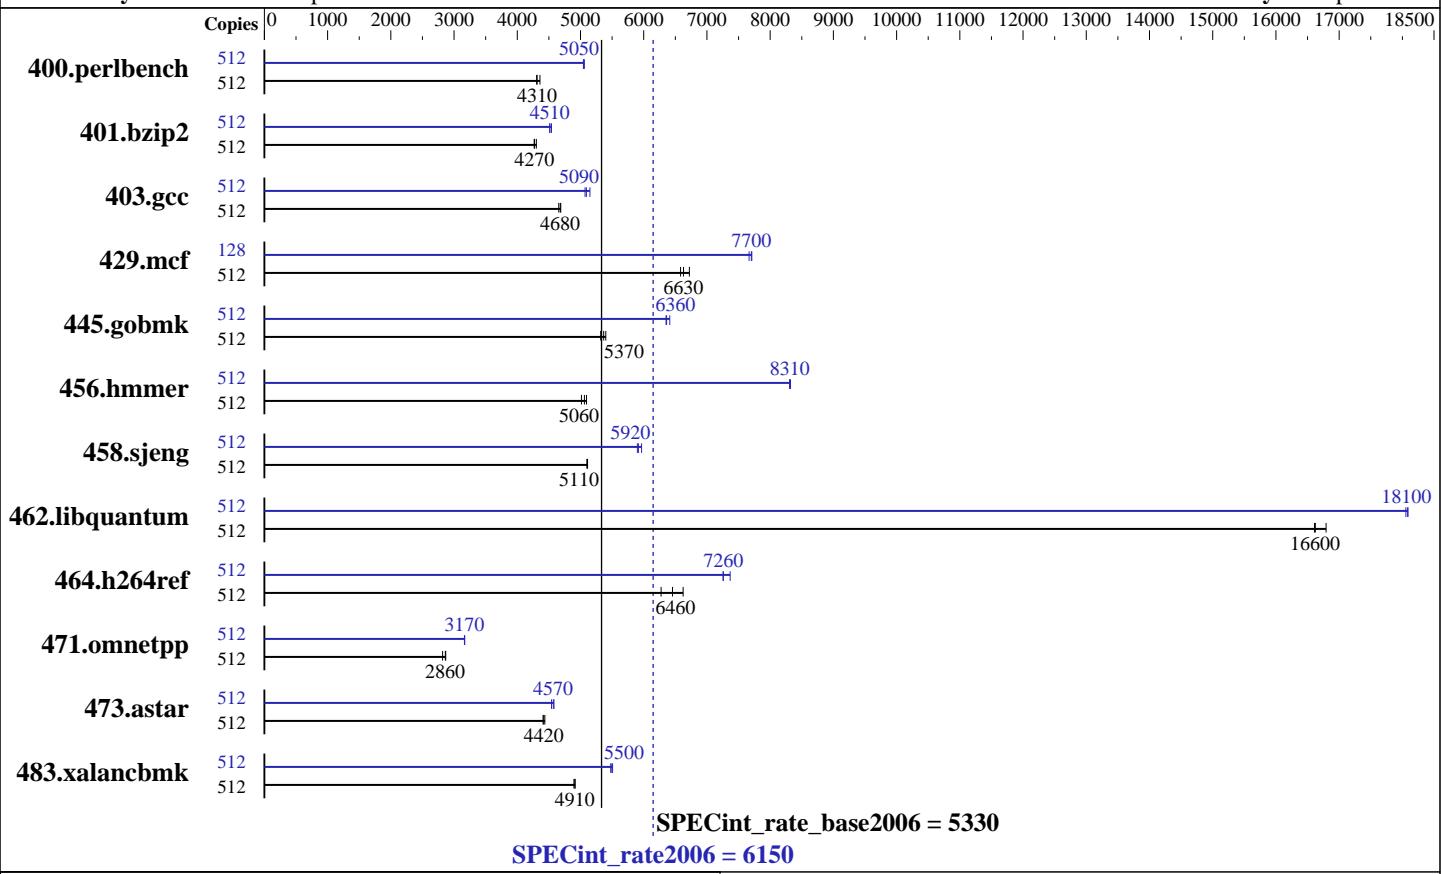

## Hardware

CPU Name: POWER7  
CPU Characteristics: TurboCore mode  
CPU MHz: 4256  
FPU: Integrated  
CPU(s) enabled: 128 cores, 32 chips, 4 cores/chip, 4 threads/core  
CPU(s) orderable: 48 - 128 cores  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 4 MB I+D on chip per core  
Other Cache: 16 MB I+D on chip per chip  
Memory: 2 TB (256 x 8 GB) DDR3 1066 MHz  
Disk Subsystem: 38 x 146.8 GB Raid0 SAS SFF 15K RPM  
Other Hardware: None

## Software

Operating System: IBM AIX V7.1  
Compiler: IBM XL C/C++ for AIX, V11.1  
Version: 11.01.0000.0002  
Auto Parallel: No  
File System: AIX/JFS2  
System State: Multi-user  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 6150**

**IBM Power 795 (4.25 GHz, 128 core)**

**SPECint\_rate\_base2006 = 5330**

**CPU2006 license:** 11

**Test date:** Aug-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Sep-2010

**Tested by:** IBM Corporation

**Software Availability:** Sep-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	512	<b>1160</b>	<b>4310</b>	1162	4310	1148	4360	512	<b>990</b>	<b>5050</b>	991	5050	988	5060
401.bzip2	512	<b>1156</b>	<b>4270</b>	1149	4300	1158	4270	512	1088	4540	1094	4510	<b>1094</b>	<b>4510</b>
403.gcc	512	885	4660	<b>881</b>	<b>4680</b>	879	4690	512	813	5070	<b>809</b>	<b>5090</b>	800	5150
429.mcf	512	709	6580	<b>704</b>	<b>6630</b>	695	6720	128	152	7670	151	7710	<b>152</b>	<b>7700</b>
445.gobmk	512	<b>1001</b>	<b>5370</b>	995	5400	1010	5320	512	845	6350	838	6410	<b>844</b>	<b>6360</b>
456.hammer	512	<b>944</b>	<b>5060</b>	953	5020	937	5100	512	<b>575</b>	<b>8310</b>	575	8310	574	8320
458.sjeng	512	1212	5110	1214	5100	<b>1213</b>	<b>5110</b>	512	1038	5970	1050	5900	<b>1047</b>	<b>5920</b>
462.libquantum	512	632	16800	<b>638</b>	<b>16600</b>	639	16600	512	<b>587</b>	<b>18100</b>	586	18100	588	18100
464.h264ref	512	1806	6280	<b>1755</b>	<b>6460</b>	1711	6620	512	<b>1561</b>	<b>7260</b>	1538	7370	1562	7250
471.omnetpp	512	1116	2870	<b>1118</b>	<b>2860</b>	1135	2820	512	1010	3170	1011	3160	<b>1010</b>	<b>3170</b>
473.astar	512	<b>813</b>	<b>4420</b>	815	4410	810	4440	512	<b>787</b>	<b>4570</b>	791	4540	785	4580
483.xalancbmk	512	719	4910	<b>719</b>	<b>4910</b>	722	4900	512	<b>643</b>	<b>5500</b>	645	5480	641	5510

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

```

fdpr binary optimization tool used for 401.bzip2
with options -04 -sdp 9 -rtb -vrox -nodp -m power7
fdpr binary optimization tool used for 403.gcc
with options -03 -m power7
fdpr binary optimization tool used for 429.mcf
with options -03 -m power7
fdpr binary optimization tool used for 445.gobmk
with options -03 -m power7
fdpr binary optimization tool used for 456.hammer
with options -03 -lu -1 -nodp -sdp 9 -m power7
fdpr binary optimization tool used for 458.sjeng
with options -03 -m power7
fdpr binary optimization tool used for 462.libquantum
with options -04 -nodp -m power7
fdpr binary optimization tool used for 471.omnetpp
with options -04 -nodp -m power7 -vrox
fdpr binary optimization tool used for 473.astar
with options -04 -sdp 9 -vrox -dp -m power7

```

## Submit Notes

The config file option 'submit' was used  
to assign benchmark copy to specific kernel thread using  
the "bindprocessor" command (see flags file for details).



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 6150**

IBM Power 795 (4.25 GHz, 128 core)

**SPECint\_rate\_base2006 = 5330**

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

## Operating System Notes

all ulimits set to unlimited.  
84600 16M large pages defined with vmo command

## General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"  
MEMORY\_AFFINITY = "MCM"  
XLF RTEOPTS = "intrinthds=1"

## Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_AIX

## Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage -qsimd -qvecnvol  
-D\_ILS\_MACROS -qalias=noansi -qalloc -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -O5 -qlargepage -D\_ILS\_MACROS  
-qrtti=all -D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -blpdata

## Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 6150

IBM Power 795 (4.25 GHz, 128 core)

SPECint\_rate\_base2006 = 5330

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

## Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_AIX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -D\_ILS\_MACROS  
-qalias=noansi -blpdata -btextpsize:64K  
  
401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qsimd -qvecnvol -qlargepage  
-D\_ILS\_MACROS -blpdata -btextpsize:64K  
  
403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage  
-D\_ILS\_MACROS -qalloc -blpdata -btextpsize:64K  
  
429.mcf: Same as 401.bzip2  
  
445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd  
-qvecnvol -qlargepage -D\_ILS\_MACROS -blpdata  
-btextpsize:64K  
  
456.hmmer: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign  
-D\_ILS\_MACROS -blpdata -btextpsize:64K  
  
458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-D\_ILS\_MACROS -blpdata -btextpsize:64K  
  
462.libquantum: -O5 -q64 -qlargepage -D\_ILS\_MACROS -blpdata  
-btextpsize:64K  
  
464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd  
-qvecnvol -D\_ILS\_MACROS -blpdata -btextpsize:64K

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 6150

IBM Power 795 (4.25 GHz, 128 core)

SPECint\_rate\_base2006 = 5330

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
             -qpdf2(pass 2) -O4 -D_ILS_MACROS -qalign=natural
             -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
             -blpdata -btextpsize:64K
```

```
473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
             -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qinlglue
             -qalign=natural -blpdata -btextpsize:64K
```

```
483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
                 -qpdf2(pass 2) -O4 -qsimd -qvecnvol -qarch=pwr5
                 -qtune=pwr5 -qlargepage -D_ILS_MACROS -qinlglue
                 -D__IBM_FAST_VECTOR -blpdata -btextpsize:64K
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-qipa=noobject -qsuppress=1500-036
```

```
400.perlbench: -qsuppress=1500-036
```

```
403.gcc: -qsuppress=1500-036
```

```
462.libquantum: -qsuppress=1500-036
```

C++ benchmarks (except as noted below):

```
-qipa=noobject -qsuppress=1500-036
```

```
471.omnetpp: -qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 6150**

IBM Power 795 (4.25 GHz, 128 core)

**SPECint\_rate\_base2006 = 5330**

**CPU2006 license:** 11

**Test date:** Aug-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Sep-2010

**Tested by:** IBM Corporation

**Software Availability:** Sep-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:44:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 September 2010.