



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 470

PowerEdge R815 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint_rate_base2006 = 409

CPU2006 license: 55


Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

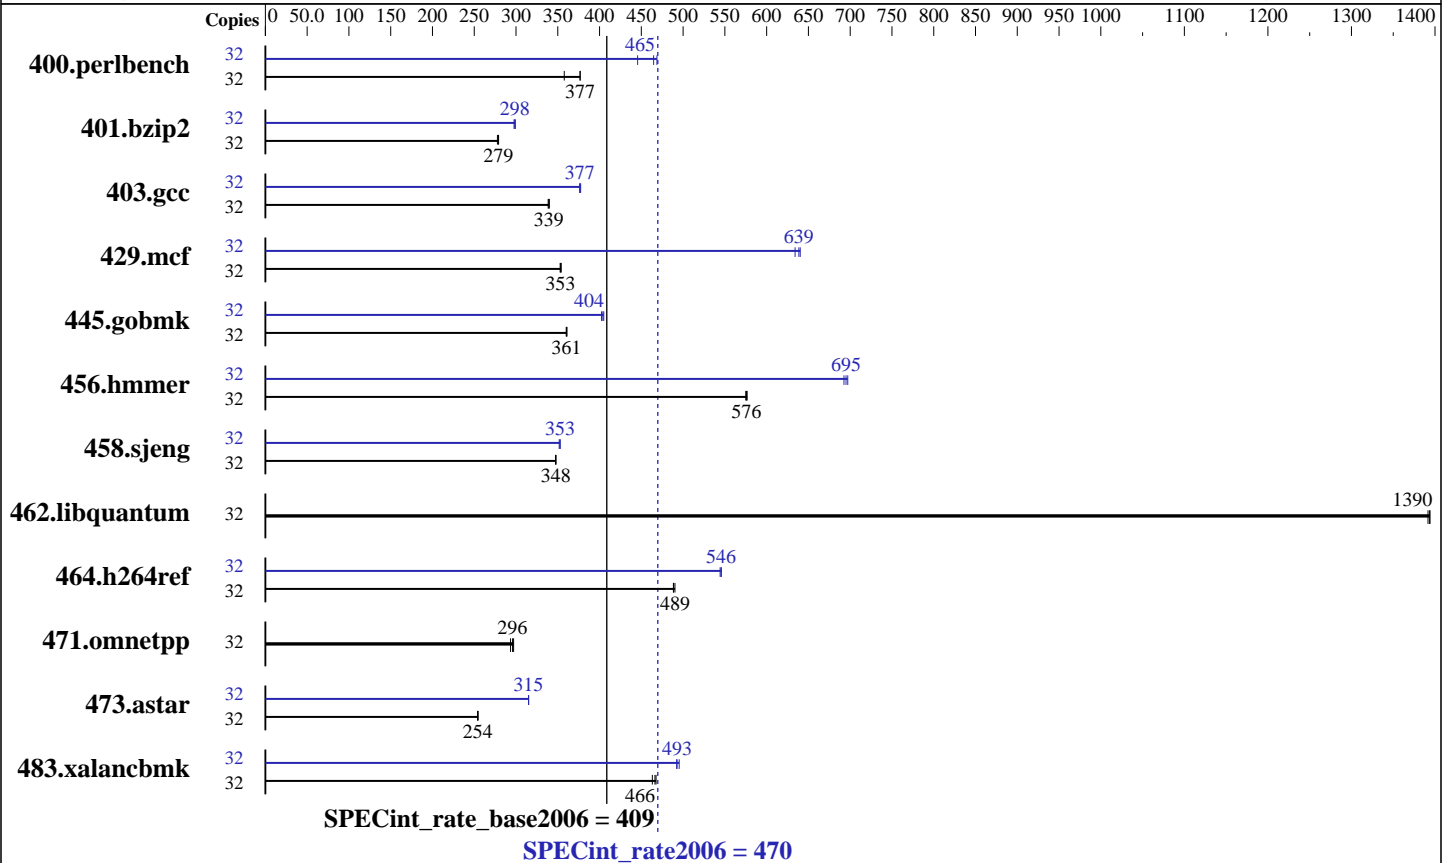

Hardware

CPU Name: AMD Opteron 6124 HE
 CPU Characteristics: 1800
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores
 Other Cache: None
 Memory: 128 GB (32 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
 Disk Subsystem: 1 x 146 GB SAS 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 470

PowerEdge R815 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint_rate_base2006 = 409

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Aug-2010
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	874	358	830	377	830	377	32	702	446	667	469	673	465
401.bzip2	32	1112	278	1107	279	1106	279	32	1037	298	1032	299	1035	298
403.gcc	32	758	340	759	339	761	338	32	685	376	684	377	683	377
429.mcf	32	824	354	827	353	826	353	32	456	640	457	639	460	634
445.gobmk	32	932	360	931	361	930	361	32	831	404	834	402	829	405
456.hammer	32	519	575	518	576	518	577	32	430	695	428	697	431	693
458.sjeng	32	1114	348	1115	347	1114	348	32	1101	352	1098	353	1098	353
462.libquantum	32	476	1390	476	1390	476	1390	32	476	1390	476	1390	476	1390
464.h264ref	32	1450	488	1449	489	1444	490	32	1298	546	1298	546	1301	544
471.omnetpp	32	673	297	676	296	682	293	32	673	297	676	296	682	293
473.astar	32	882	255	884	254	884	254	32	713	315	713	315	713	315
483.xalancbmk	32	477	463	472	468	474	466	32	448	493	449	492	446	495

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 470

PowerEdge R815 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint_rate_base2006 = 409

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Aug-2010
Software Availability: Jul-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 470

PowerEdge R815 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint_rate_base2006 = 409

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
 -LNO:ignore_feedback=off -CG:p2align=on
 -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
 -OPT:alias=disjoint -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:local_sched_alg=1 -CG:cflow=0
 -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 470

PowerEdge R815 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint_rate_base2006 = 409

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Aug-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
          -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
          -IPA:pu_reorder=2 -CG:ptr_load_use=0
          -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

462.libquantum: basepeak = yes

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
            -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
            -CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -GRA:optimize_boundary=on
          -OPT:alias=disjoint -INLINE:aggressive=on
          -IPA:small_pu=3000 -IPA:plimit=3000 -m32
          -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
              -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
              -fno-emit-exceptions
              -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:04:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.