



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 380

PowerEdge R715 (AMD Opteron 6172, 2.10 GHz)

SPECint_rate_base2006 = 328

CPU2006 license: 55


Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

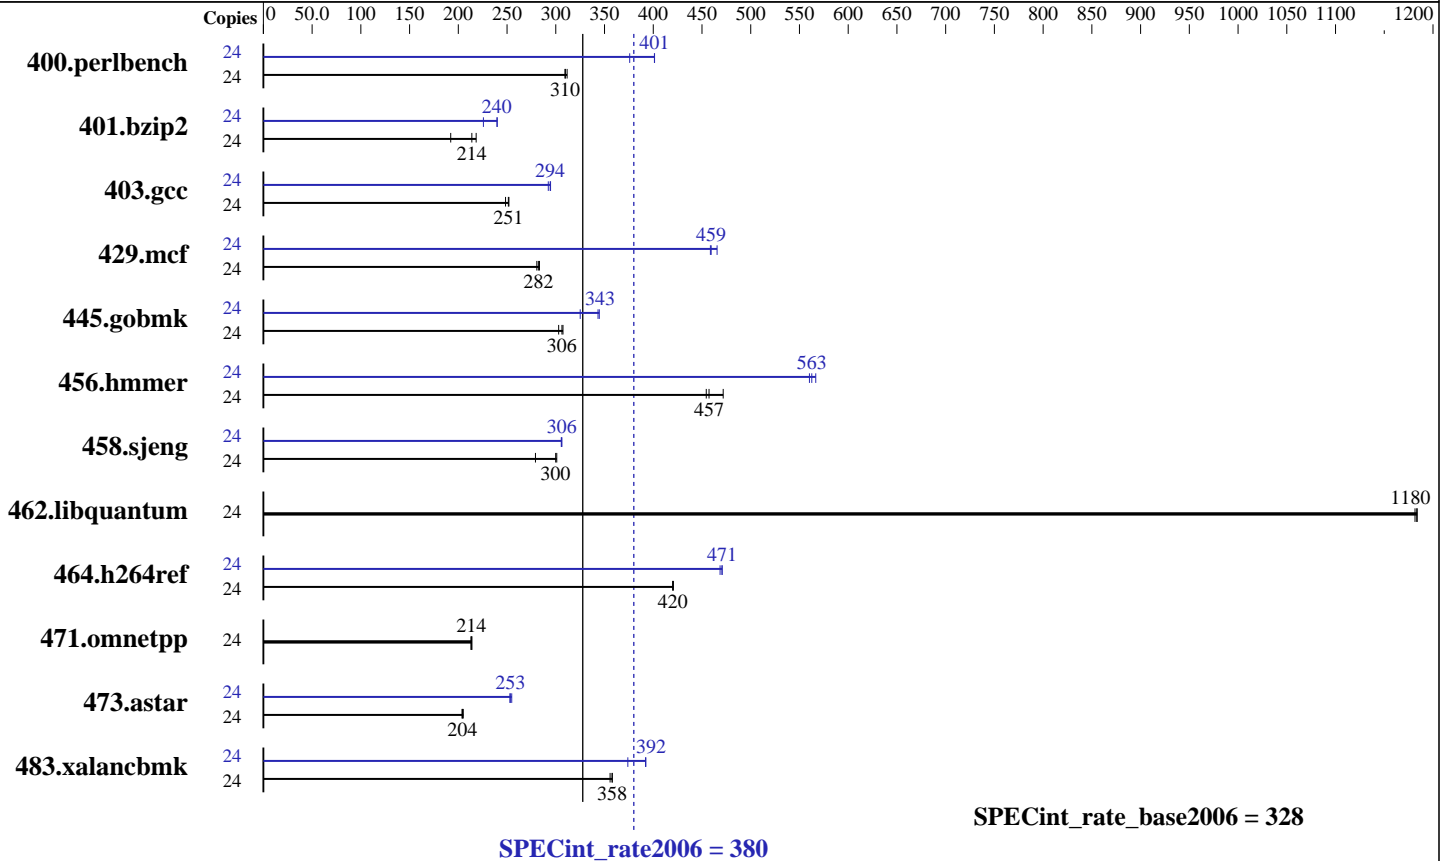

Hardware

CPU Name: AMD Opteron 6172
 CPU Characteristics:
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
 Disk Subsystem: 1 x 146 GB SAS 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 380

PowerEdge R715 (AMD Opteron 6172, 2.10 GHz)

SPECint_rate_base2006 = 328

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	758	309	<u>757</u>	<u>310</u>	752	312	24	624	376	<u>584</u>	<u>401</u>	584	401
401.bzip2	24	<u>1083</u>	<u>214</u>	1205	192	1061	218	24	1026	226	965	240	<u>966</u>	<u>240</u>
403.gcc	24	<u>769</u>	<u>251</u>	767	252	778	248	24	656	295	661	292	<u>657</u>	<u>294</u>
429.mcf	24	773	283	<u>776</u>	<u>282</u>	780	281	24	477	459	470	466	<u>476</u>	<u>459</u>
445.gobmk	24	819	307	831	303	<u>822</u>	<u>306</u>	24	731	345	<u>733</u>	<u>343</u>	775	325
456.hammer	24	493	454	<u>490</u>	<u>457</u>	475	472	24	<u>398</u>	<u>563</u>	400	560	395	567
458.sjeng	24	1040	279	<u>968</u>	<u>300</u>	965	301	24	950	306	<u>949</u>	<u>306</u>	948	306
462.libquantum	24	<u>420</u>	<u>1180</u>	420	1180	421	1180	24	<u>420</u>	<u>1180</u>	420	1180	421	1180
464.h264ref	24	<u>1264</u>	<u>420</u>	1265	420	1263	421	24	1134	469	<u>1129</u>	<u>471</u>	1128	471
471.omnetpp	24	701	214	705	213	<u>702</u>	<u>214</u>	24	701	214	705	213	<u>702</u>	<u>214</u>
473.astar	24	827	204	<u>825</u>	<u>204</u>	822	205	24	666	253	661	255	<u>665</u>	<u>253</u>
483.xalancbmk	24	463	358	<u>463</u>	<u>358</u>	466	356	24	443	374	<u>422</u>	<u>392</u>	422	392

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 380

PowerEdge R715 (AMD Opteron 6172, 2.10 GHz)

SPECint_rate_base2006 = 328

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 380

PowerEdge R715 (AMD Opteron 6172, 2.10 GHz)

SPECint_rate_base2006 = 328

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
 -LNO:ignore_feedback=off -CG:p2align=on
 -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
 -OPT:alias=disjoint -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:local_sched_alg=1 -CG:cflow=0
 -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 380

PowerEdge R715 (AMD Opteron 6172, 2.10 GHz)

SPECint_rate_base2006 = 328

CPU2006 license: 55

Test date: Aug-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
          -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
          -IPA:pu_reorder=2 -CG:ptr_load_use=0
          -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

462.libquantum: basepeak = yes

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
            -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
            -CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -GRA:optimize_boundary=on
          -OPT:alias=disjoint -INLINE:aggressive=on
          -IPA:small_pu=3000 -IPA:plimit=3000 -m32
          -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
              -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
              -fno-emit-exceptions
              -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:54:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.