



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®2006 = 21.7

BladeSymphony BS320 (Intel Xeon E5503)

SPECint_base2006 = 19.3

CPU2006 license: 872


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

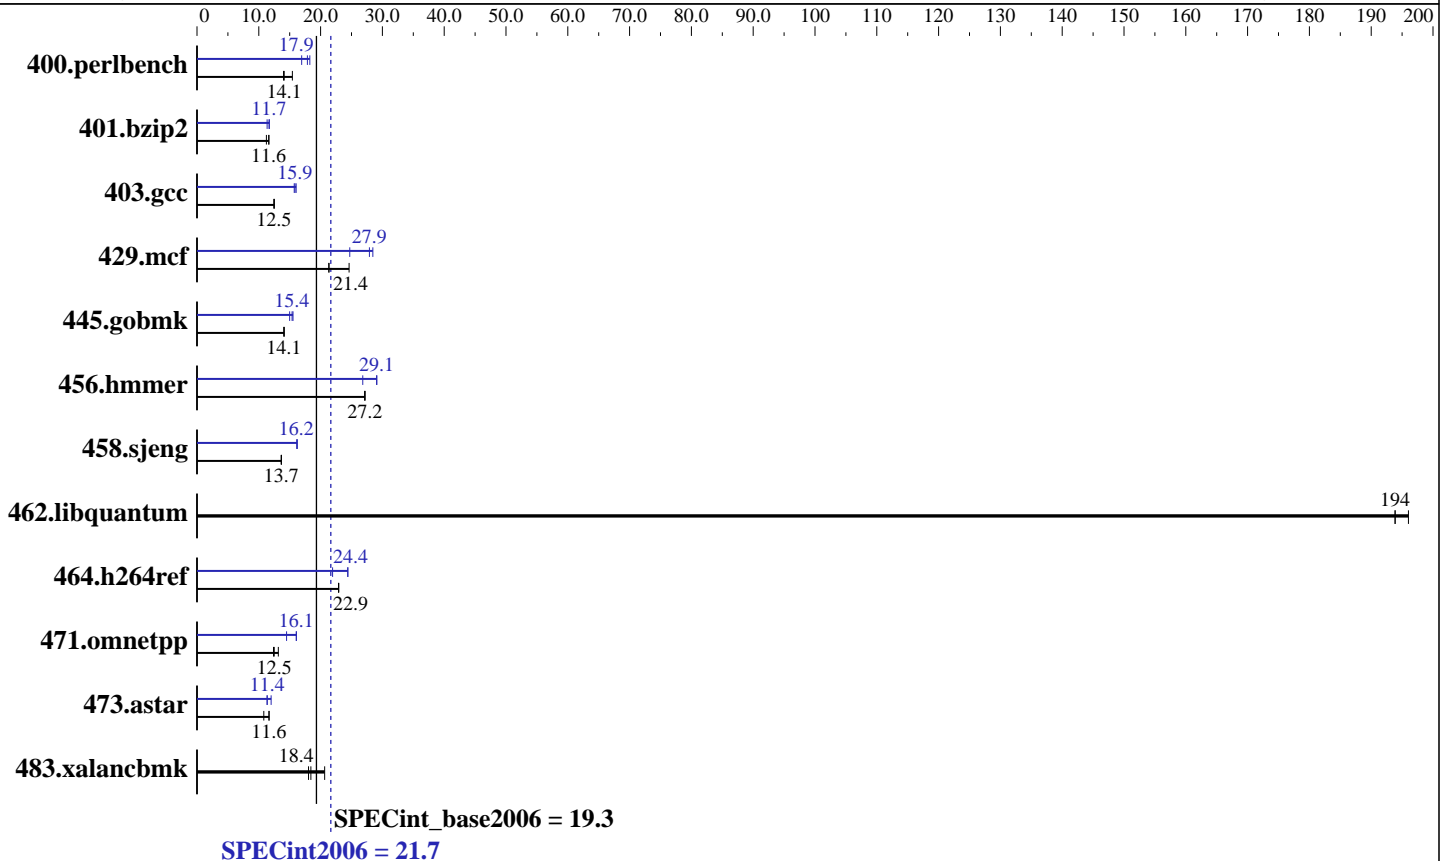

Hardware

CPU Name: Intel Xeon E5503
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 rank, CL9-9-9)
 Disk Subsystem: 1 x 73 GB 10000 rpm SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
 Compiler: Intel C++ Compiler 11.1 for Linux Build 20091012 Package ID: l_cproc_p_11.1.059
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = **21.7**

BladeSymphony BS320 (Intel Xeon E5503)

SPECint_base2006 = **19.3**

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>692</u>	<u>14.1</u>	698	14.0	633	15.4	<u>547</u>	<u>17.9</u>	535	18.3	577	16.9
401.bzip2	<u>832</u>	<u>11.6</u>	859	11.2	829	11.6	<u>827</u>	<u>11.7</u>	850	11.3	825	11.7
403.gcc	645	12.5	646	12.5	<u>645</u>	<u>12.5</u>	<u>507</u>	<u>15.9</u>	512	15.7	502	16.0
429.mcf	371	24.6	<u>427</u>	<u>21.4</u>	428	21.3	369	24.7	<u>327</u>	<u>27.9</u>	321	28.5
445.gobmk	745	14.1	745	14.1	<u>745</u>	<u>14.1</u>	700	15.0	675	15.5	<u>682</u>	<u>15.4</u>
456.hmmmer	343	27.2	<u>343</u>	<u>27.2</u>	344	27.1	348	26.8	321	29.1	<u>321</u>	<u>29.1</u>
458.sjeng	<u>886</u>	<u>13.7</u>	885	13.7	888	13.6	<u>748</u>	<u>16.2</u>	748	16.2	747	16.2
462.libquantum	107	194	106	196	<u>107</u>	<u>194</u>	107	194	106	196	<u>107</u>	<u>194</u>
464.h264ref	966	22.9	965	22.9	<u>966</u>	<u>22.9</u>	<u>907</u>	<u>24.4</u>	907	24.4	1009	21.9
471.omnetpp	<u>500</u>	<u>12.5</u>	475	13.2	505	12.4	431	14.5	389	16.1	<u>389</u>	<u>16.1</u>
473.astar	649	10.8	<u>603</u>	<u>11.6</u>	601	11.7	585	12.0	<u>618</u>	<u>11.4</u>	619	11.3
483.xalancbmk	<u>374</u>	<u>18.4</u>	382	18.0	334	20.7	<u>374</u>	<u>18.4</u>	382	18.0	334	20.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 21.7

BladeSymphony BS320 (Intel Xeon E5503)

SPECint_base2006 = 19.3

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Base Portability Flags (Continued)

471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/bsc/smartheap/lib -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 21.7

BladeSymphony BS320 (Intel Xeon E5503)

SPECint_base2006 = 19.3

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Portability Flags (Continued)

403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/home/bsc/smartheap/lib -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 21.7

BladeSymphony BS320 (Intel Xeon E5503)

SPECint_base2006 = 19.3

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/bsc/smartheap/lib -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:46:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.