



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

### SPECint®\_rate2006 = 346

### Cisco UCS C210 M2 (Intel Xeon X5650, 2.67 GHz)

### SPECint\_rate\_base2006 = 324

CPU2006 license: 9019


Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

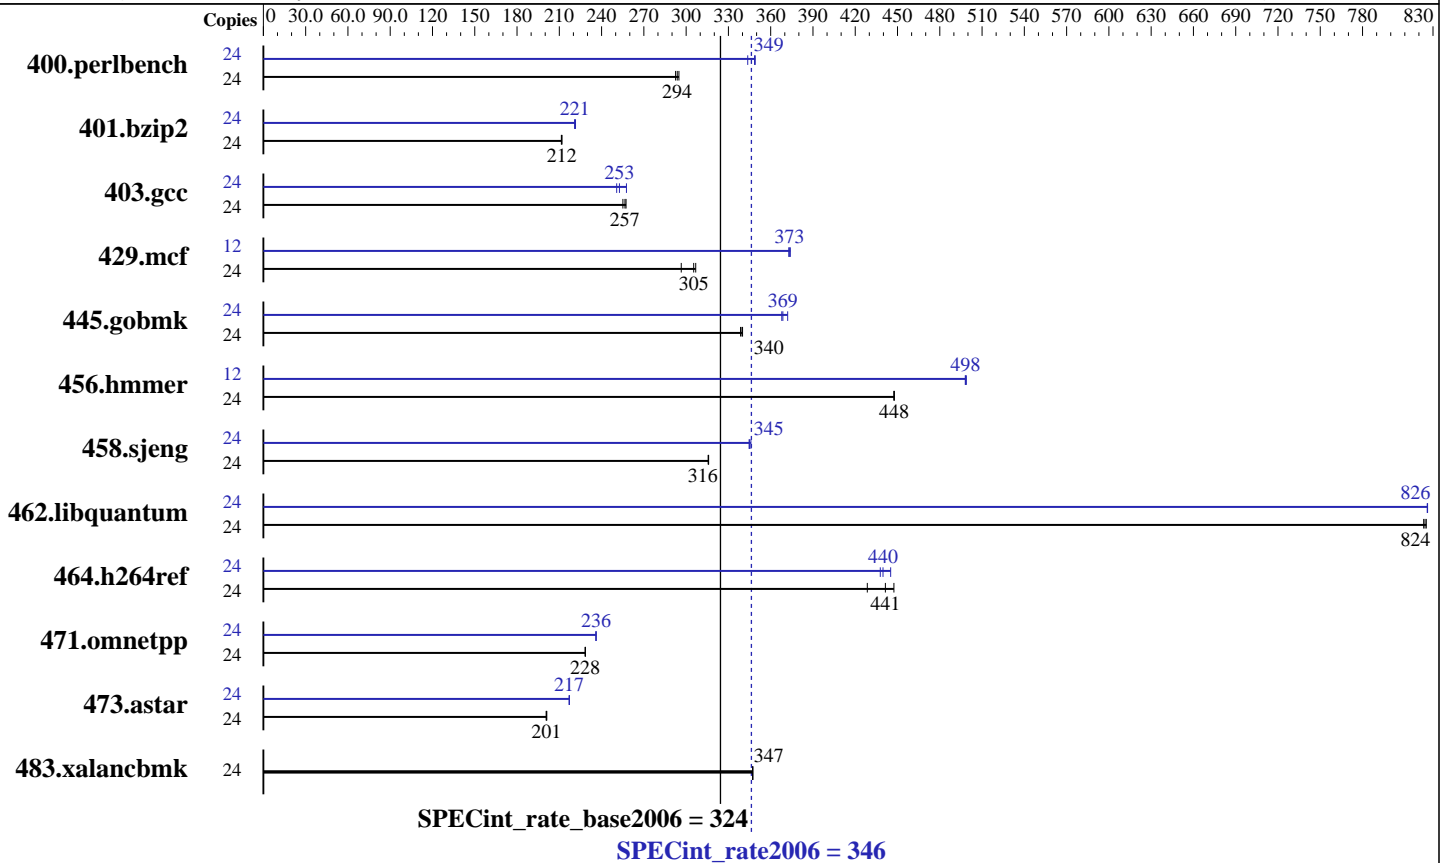

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4GB DDR3-1333 MHz DR RDIMM, CL9, ECC)  
 Disk Subsystem: 146 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: SuSe Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27-15-2-default, RC4  
 Compiler: Intel C++ and Fortran Compiler 11.1 IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064 L\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library V8.1 (64-bit)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint\_rate2006 = 346

Cisco UCS C210 M2 (Intel Xeon X5650, 2.67 GHz)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Sep-2010  
Hardware Availability: Apr-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	<b><u>798</u></b>	<b><u>294</u></b>	802	293	795	295	24	<b><u>673</u></b>	<b><u>349</u></b>	672	349	682	344		
401.bzip2	24	1095	211	<b><u>1094</u></b>	<b><u>212</u></b>	1093	212	24	1048	221	1046	221	<b><u>1048</u></b>	<b><u>221</u></b>		
403.gcc	24	751	257	757	255	<b><u>753</u></b>	<b><u>257</u></b>	24	750	258	<b><u>765</u></b>	<b><u>253</u></b>	771	251		
429.mcf	24	738	297	<b><u>717</u></b>	<b><u>305</u></b>	713	307	12	<b><u>293</u></b>	<b><u>373</u></b>	293	374	294	373		
445.gobmk	24	740	340	744	339	<b><u>741</u></b>	<b><u>340</u></b>	24	677	372	684	368	<b><u>683</u></b>	<b><u>369</u></b>		
456.hammer	24	500	448	500	447	<b><u>500</u></b>	<b><u>448</u></b>	12	<b><u>225</u></b>	<b><u>498</u></b>	225	498	224	499		
458.sjeng	24	920	316	919	316	<b><u>919</u></b>	<b><u>316</u></b>	24	839	346	<b><u>842</u></b>	<b><u>345</u></b>	842	345		
462.libquantum	24	603	825	<b><u>603</u></b>	<b><u>824</u></b>	604	823	24	602	826	602	826	<b><u>602</u></b>	<b><u>826</u></b>		
464.h264ref	24	1187	447	1239	429	<b><u>1203</u></b>	<b><u>441</u></b>	24	<b><u>1208</u></b>	<b><u>440</u></b>	1193	445	1213	438		
471.omnetpp	24	656	229	<b><u>657</u></b>	<b><u>228</u></b>	657	228	24	<b><u>635</u></b>	<b><u>236</u></b>	635	236	636	236		
473.astar	24	<b><u>838</u></b>	<b><u>201</u></b>	838	201	840	201	24	<b><u>776</u></b>	<b><u>217</u></b>	776	217	776	217		
483.xalancbmk	24	<b><u>477</u></b>	<b><u>347</u></b>	477	347	477	347	24	<b><u>477</u></b>	<b><u>347</u></b>	477	347	477	347		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 346

Cisco UCS C210 M2 (Intel Xeon X5650, 2.67 GHz)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 346

Cisco UCS C210 M2 (Intel Xeon X5650, 2.67 GHz)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmarheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 346

Cisco UCS C210 M2 (Intel Xeon X5650, 2.67 GHz)

SPECint\_rate\_base2006 = 324

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100929.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100929.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:37:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 October 2010.