



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint<sup>®</sup>\_rate2006 = 154

PRIMERGY TX200 S6, Intel Xeon E5507, 2.26 GHz

### SPECint\_rate\_base2006 = 144

CPU2006 license: 19


Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: May-2010

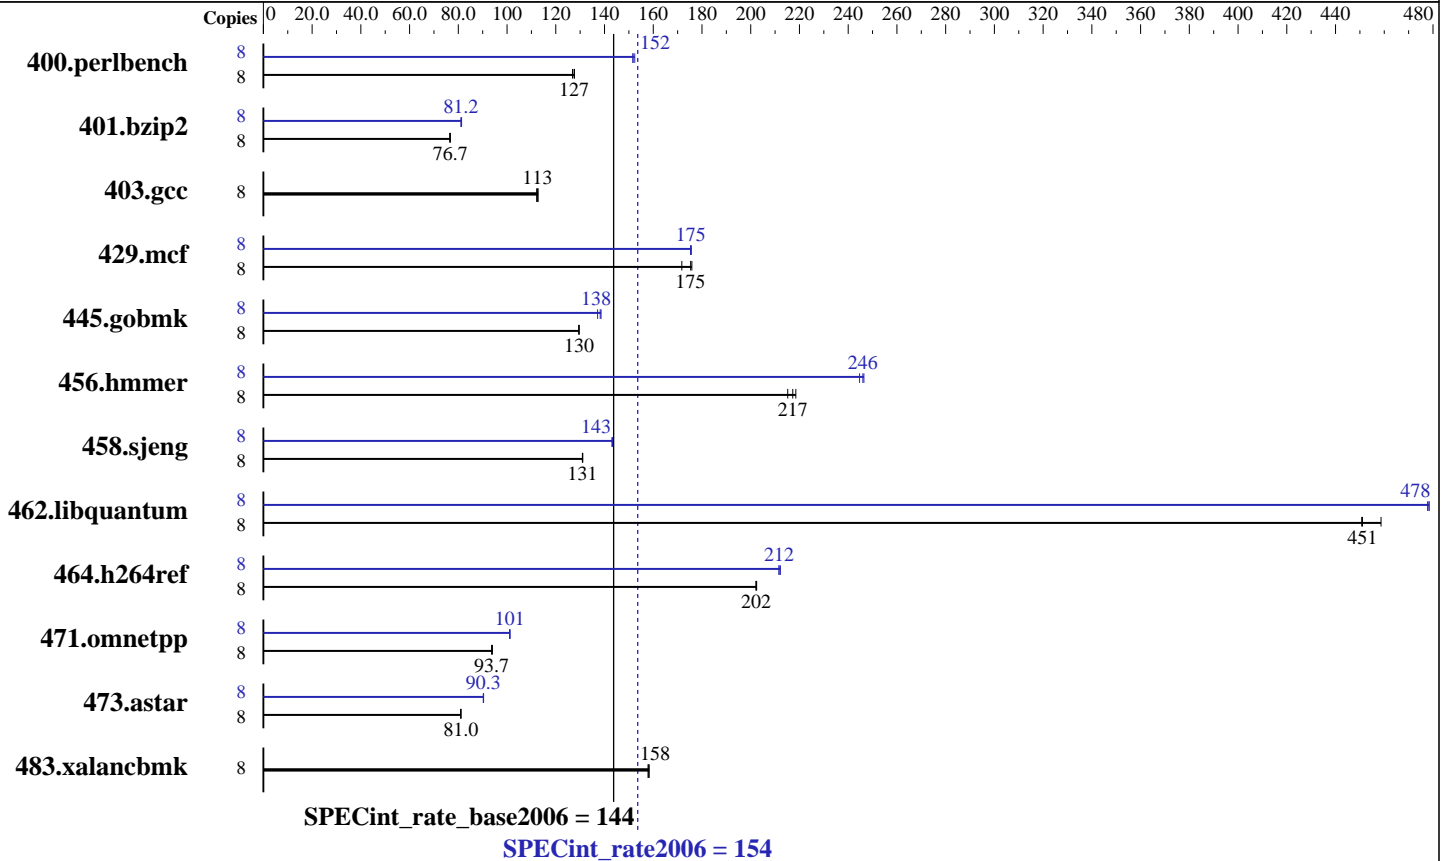

### Hardware

CPU Name: Intel Xeon E5507  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SATA, 160 GB, 5.4 krpm  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 154

PRIMERGY TX200 S6, Intel Xeon E5507, 2.26 GHz

SPECint\_rate\_base2006 = 144

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: May-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	612	128	<b>613</b>	<b>127</b>	616	127	8	516	152	513	152	<b>515</b>	<b>152</b>
401.bzip2	8	<b>1007</b>	<b>76.7</b>	1007	76.7	1009	76.5	8	949	81.3	<b>951</b>	<b>81.2</b>	952	81.1
403.gcc	8	<b>572</b>	<b>113</b>	571	113	574	112	8	<b>572</b>	<b>113</b>	571	113	574	112
429.mcf	8	425	172	415	176	<b>416</b>	<b>175</b>	8	415	176	416	175	<b>416</b>	<b>175</b>
445.gobmk	8	648	130	<b>648</b>	<b>130</b>	648	129	8	<b>607</b>	<b>138</b>	612	137	606	139
456.hammer	8	347	215	342	219	<b>344</b>	<b>217</b>	8	303	246	305	245	<b>303</b>	<b>246</b>
458.sjeng	8	<b>739</b>	<b>131</b>	738	131	739	131	8	<b>676</b>	<b>143</b>	676	143	677	143
462.libquantum	8	368	451	<b>367</b>	<b>451</b>	361	459	8	347	478	346	478	<b>347</b>	<b>478</b>
464.h264ref	8	875	202	<b>875</b>	<b>202</b>	876	202	8	834	212	<b>837</b>	<b>212</b>	837	212
471.omnetpp	8	532	94.0	534	93.7	<b>533</b>	<b>93.7</b>	8	<b>495</b>	<b>101</b>	494	101	495	101
473.astar	8	694	81.0	<b>693</b>	<b>81.0</b>	692	81.1	8	<b>622</b>	<b>90.3</b>	622	90.3	621	90.4
483.xalancbmk	8	350	158	349	158	<b>350</b>	<b>158</b>	8	350	158	349	158	<b>350</b>	<b>158</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 800 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 154

PRIMERGY TX200 S6, Intel Xeon E5507, 2.26 GHz

SPECint\_rate\_base2006 = 144

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: May-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 154

PRIMERGY TX200 S6, Intel Xeon E5507, 2.26 GHz

SPECint\_rate\_base2006 = 144

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: May-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: basepeak = yes  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 154

PRIMERGY TX200 S6, Intel Xeon E5507, 2.26 GHz

SPECint\_rate\_base2006 = 144

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: May-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:38:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 October 2010.