



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint[®]_rate2006 = 2740

IBM Power 780 (3.86 GHz, 64 core, RedHat)

SPECint_rate_base2006 = 2440

CPU2006 license: 11


Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

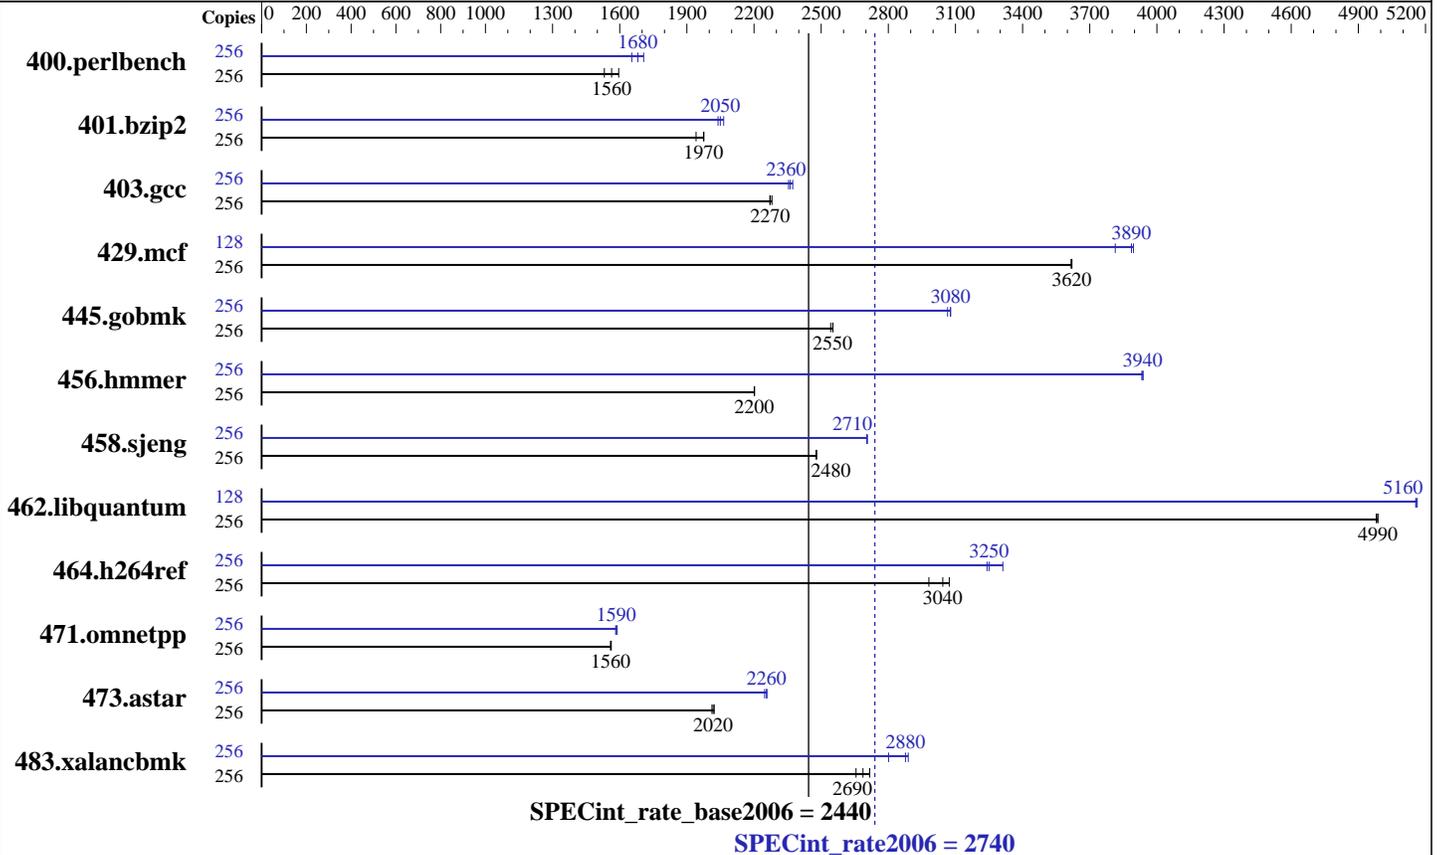

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.94 GHz
 CPU MHz: 3860
 FPU: Integrated
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 8,16,24,32,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz
 Disk Subsystem: 3x146.8 GB Software RAID-0 SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.0 (ppc64), Kernel 2.6.32-71.el6.ppc64
 Compiler: IBM XL C/C++ for Linux, V11.1 Updated with the Nov2010 PTF
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3
 -MicroQuill SmartHeap 9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2740

IBM Power 780 (3.86 GHz, 64 core, RedHat)

SPECint_rate_base2006 = 2440

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	1633	1530	1568	1600	<u>1599</u>	<u>1560</u>	256	1512	1650	<u>1488</u>	<u>1680</u>	1465	1710
401.bzip2	256	1250	1980	<u>1251</u>	<u>1970</u>	1273	1940	256	1197	2060	1211	2040	<u>1205</u>	<u>2050</u>
403.gcc	256	908	2270	<u>907</u>	<u>2270</u>	904	2280	256	<u>873</u>	<u>2360</u>	868	2370	875	2350
429.mcf	256	646	3620	645	3620	<u>645</u>	<u>3620</u>	128	300	3900	306	3810	<u>300</u>	<u>3890</u>
445.gobmk	256	1052	2550	1056	2540	<u>1052</u>	<u>2550</u>	256	872	3080	<u>872</u>	<u>3080</u>	876	3060
456.hmmer	256	<u>1085</u>	<u>2200</u>	1085	2200	1084	2200	256	607	3940	<u>607</u>	<u>3940</u>	607	3930
458.sjeng	256	1250	2480	1249	2480	<u>1250</u>	<u>2480</u>	256	1146	2700	<u>1145</u>	<u>2710</u>	1145	2710
462.libquantum	256	<u>1064</u>	<u>4990</u>	1065	4980	1064	4990	128	514	5160	<u>514</u>	<u>5160</u>	514	5160
464.h264ref	256	1900	2980	<u>1862</u>	<u>3040</u>	1844	3070	256	1711	3310	<u>1743</u>	<u>3250</u>	1748	3240
471.omnetpp	256	<u>1026</u>	<u>1560</u>	1026	1560	1024	1560	256	1011	1580	<u>1009</u>	<u>1590</u>	1007	1590
473.astar	256	893	2010	889	2020	<u>891</u>	<u>2020</u>	256	796	2260	<u>797</u>	<u>2260</u>	800	2250
483.xalanbmk	256	665	2660	650	2720	<u>657</u>	<u>2690</u>	256	631	2800	<u>614</u>	<u>2880</u>	611	2890

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

IBM Post-Link Optimization tool with options "-O4 -omullX" used for
 400.perlbench
 options "-O4 -vrox" used for
 401.bzip2
 options "-O4 -nodp -rtb"
 403.gcc
 options "-O3" used for
 429.mcf 445.gobmk 458.sjeng 473.astar
 options "-O4 -nodp -m power7" used for
 456.hmmer
 options "-O4 -vrox -nodp" used for
 462.libquantum
 options "-O4 -vrox -nodp -rtb" used for
 464.h264ref
 options "-O3 -lu -l -nodp -sdp 9" used for
 471.omnetpp
 options "-O3 -m power7" used for
 483.xalanbmk
 Whenever option "-omullX" was used during the optimization phase,
 option "-imullX" was also used during the instrumentation phase.

Submit Notes

The config file option 'submit' was used.
 Benchmarks bound to a processor using numactl on the submit command.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2740

IBM Power 780 (3.86 GHz, 64 core, RedHat)

SPECint_rate_base2006 = 2440

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

Operating System Notes

ulimit -s (stack) set to 1048576.

Large pages reserved as follows by root user:

```
echo 18000 > /proc/sys/vm/nr_hugepages
```

The following environment variables were set before the runspec command:

```
XLFRTEOPTS=intrinths=1
```

```
HUGETLB_VERBOSE=0
```

```
HUGETLB_MORECORE=yes
```

```
HUGETLB_ELFMAP=RW
```

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlC
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
464.h264ref: -qchars=signed
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-O5 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qalloca -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lsmartheap
```

Base Other Flags

C benchmarks:

```
-qipa=threads
```

C++ benchmarks:

```
-qipa=threads
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2740

IBM Power 780 (3.86 GHz, 64 core, RedHat)

SPECint_rate_base2006 = 2440

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

x1C

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -qalias=noansi -qipa=level=2 -lsmartheap
401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs
403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -qalloca -lhugetlbfs
429.mcf: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs
445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs
456.hmmer: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -qsimd
-qassert=refalign -qipa=inline=threshold=2888
-qipa=inline=limit=11880 -lhugetlbfs
458.sjeng: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs
462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -q64 -lhugetlbfs
464.h264ref: Same as 458.sjeng

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2740

IBM Power 780 (3.86 GHz, 64 core, RedHat)

SPECint_rate_base2006 = 2440

CPU2006 license: 11

Test date: Nov-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

471.omnetpp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7
-qtune=pwr7 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7
-qtune=pwr7 -lhugetlbfs -lsmartheap

483.xalancbmk: -Wl,-q -O4 -qarch=pwr7 -qtune=pwr7 -qipa=partition=large
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-qipa=threads

C++ benchmarks:

-qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:26:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2010.