



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

J.P Sa Couto S.A.

SPECint®_rate2006 = Not Run

TSUNAMI Tidal S6016BUB server system (Intel Xeon X5520)

SPECint_rate_base2006 = 25.5

CPU2006 license: 4105


Test date: Dec-2010

Test sponsor: J.P Sa Couto S.A.

Hardware Availability: Nov-2010

Tested by: J.P Sa Couto S.A.

Software Availability: Nov-2010

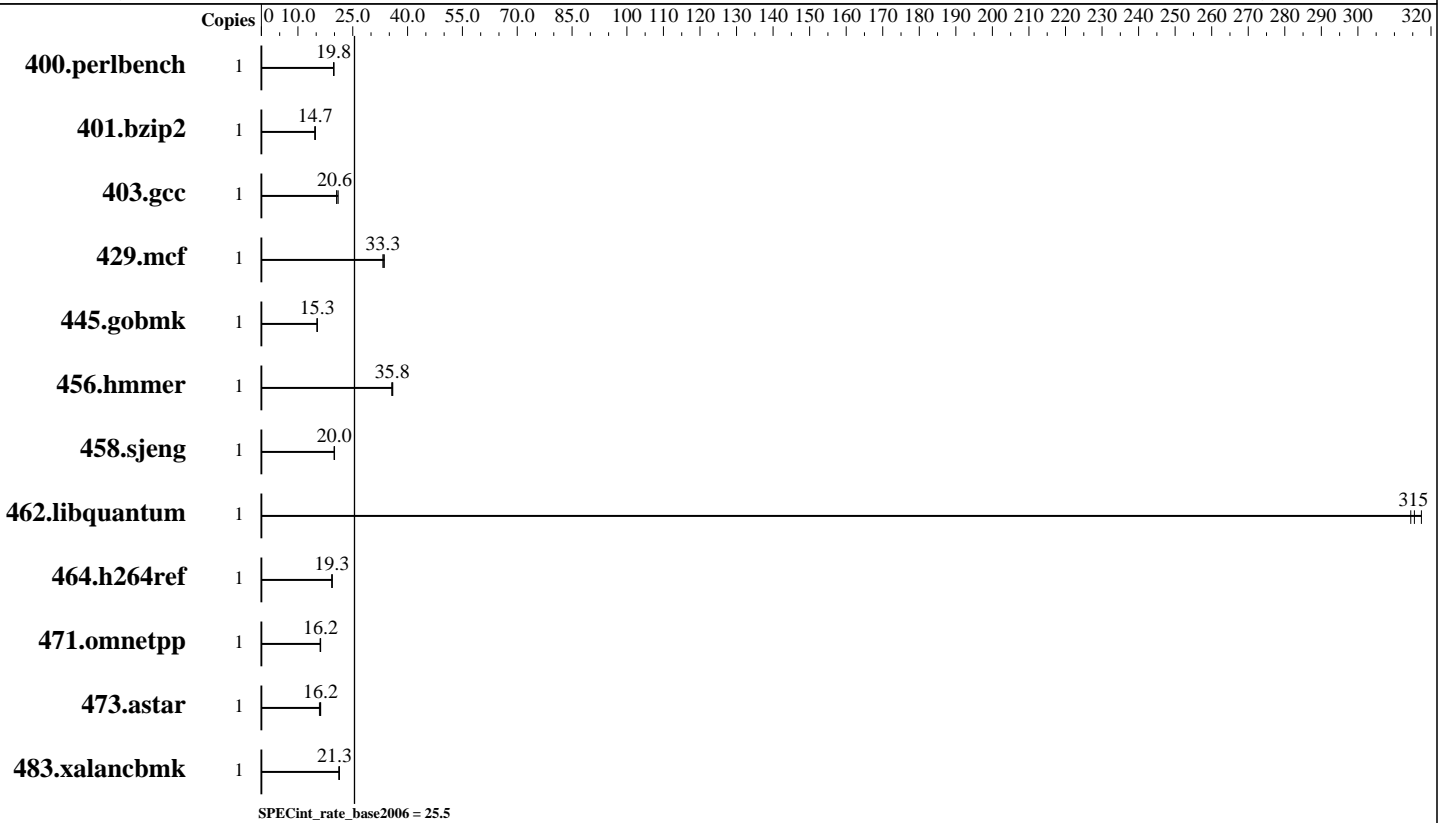

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2266
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB PC3-10600R-9, ECC)
 Disk Subsystem: INTEL X25-M SATA SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ CompilerXE for Intel 64, Version 12.0 Package ID: l_ccomp_xe_intel64_2011.0.084
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

J.P Sa Couto S.A.

SPECint_rate2006 = Not Run

TSUNAMI Tidal S6016BUB server system (Intel Xeon X5520)

SPECint_rate_base2006 = 25.5

CPU2006 license: 4105

Test date: Dec-2010

Test sponsor: J.P Sa Couto S.A.

Hardware Availability: Nov-2010

Tested by: J.P Sa Couto S.A.

Software Availability: Nov-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1	494	19.8	492	19.9	495	19.8							
401.bzip2	1	654	14.8	655	14.7	661	14.6							
403.gcc	1	391	20.6	383	21.0	390	20.6							
429.mcf	1	271	33.6	274	33.3	274	33.3							
445.gobmk	1	687	15.3	687	15.3	687	15.3							
456.hmmer	1	260	35.8	260	35.9	262	35.7							
458.sjeng	1	605	20.0	605	20.0	608	19.9							
462.libquantum	1	65.9	314	65.3	317	65.7	315							
464.h264ref	1	1142	19.4	1145	19.3	1148	19.3							
471.omnetpp	1	386	16.2	386	16.2	389	16.1							
473.astar	1	434	16.2	433	16.2	442	15.9							
483.xalancbmk	1	326	21.2	323	21.4	324	21.3							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

J.P Sa Couto S.A.

SPECint_rate2006 = Not Run

TSUNAMI Tidal S6016BUB server system (Intel Xeon X5520)

SPECint_rate_base2006 = 25.5

CPU2006 license: 4105

Test date: Dec-2010

Test sponsor: J.P Sa Couto S.A.

Hardware Availability: Nov-2010

Tested by: J.P Sa Couto S.A.

Software Availability: Nov-2010

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:13:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 December 2010.