



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HIBQRF, AMD Opteron 6174

SPECint[®]_rate2006 = 388

SPECint_rate_base2006 = 341

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

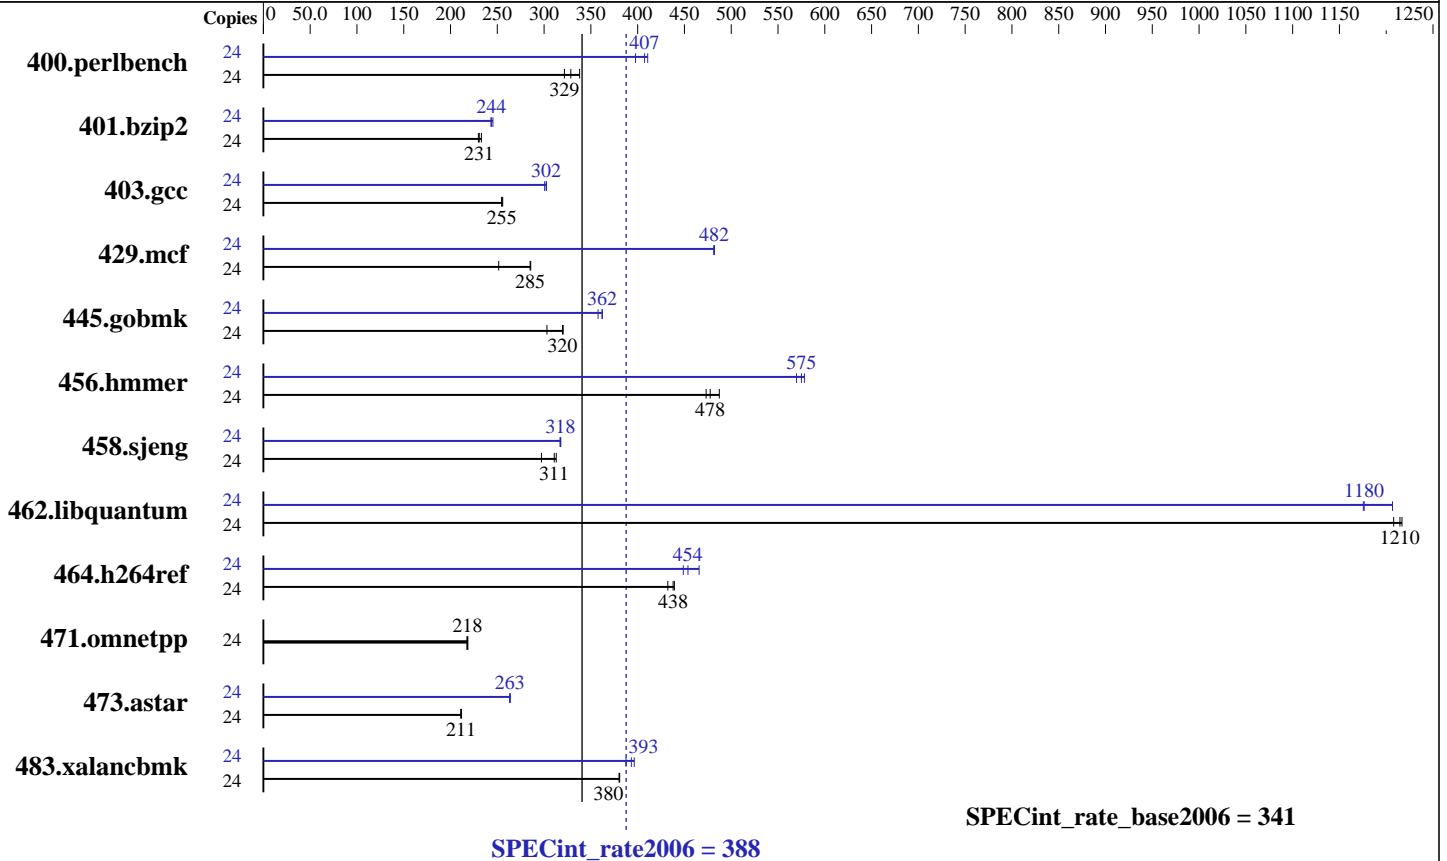

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1, Kernel 2.6.32.12-0.7-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18, SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HIBQRF, AMD Opteron 6174

SPECint_rate2006 = 388

SPECint_rate_base2006 = 341

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	694	338	<u>714</u>	<u>329</u>	729	322	24	590	398	571	411	<u>576</u>	<u>407</u>
401.bzip2	24	994	233	<u>1004</u>	<u>231</u>	1008	230	24	<u>950</u>	<u>244</u>	944	245	952	243
403.gcc	24	758	255	755	256	<u>758</u>	<u>255</u>	24	639	303	<u>639</u>	<u>302</u>	643	301
429.mcf	24	766	286	870	251	<u>768</u>	<u>285</u>	24	454	482	<u>454</u>	<u>482</u>	455	481
445.gobmk	24	<u>788</u>	<u>320</u>	786	320	831	303	24	704	358	695	362	<u>696</u>	<u>362</u>
456.hammer	24	460	487	<u>469</u>	<u>478</u>	473	473	24	393	570	387	578	<u>389</u>	<u>575</u>
458.sjeng	24	928	313	977	297	<u>934</u>	<u>311</u>	24	916	317	<u>914</u>	<u>318</u>	914	318
462.libquantum	24	<u>409</u>	<u>1210</u>	409	1220	412	1210	24	412	1210	<u>423</u>	<u>1180</u>	423	1180
464.h264ref	24	1209	439	<u>1213</u>	<u>438</u>	1229	432	24	1141	466	<u>1170</u>	<u>454</u>	1184	449
471.omnetpp	24	686	219	<u>688</u>	<u>218</u>	689	218	24	686	219	<u>688</u>	<u>218</u>	689	218
473.astar	24	799	211	796	212	<u>797</u>	<u>211</u>	24	<u>640</u>	<u>263</u>	640	263	639	264
483.xalancbmk	24	<u>435</u>	<u>380</u>	436	380	435	381	24	418	396	<u>421</u>	<u>393</u>	427	388

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
openc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HIBQRF, AMD Opteron 6174

SPECint_rate2006 = 388

SPECint_rate_base2006 = 341

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HIBQRF, AMD Opteron 6174

SPECint_rate2006 = 388

SPECint_rate_base2006 = 341

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HIBQRF, AMD Opteron 6174

SPECint_rate2006 = 388

SPECint_rate_base2006 = 341

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

Peak Optimization Flags (Continued)

458.sjeng (continued):

-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:45:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.