



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SPECint®\_rate2006 = 416

SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)

SPECint\_rate\_base2006 = 384

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

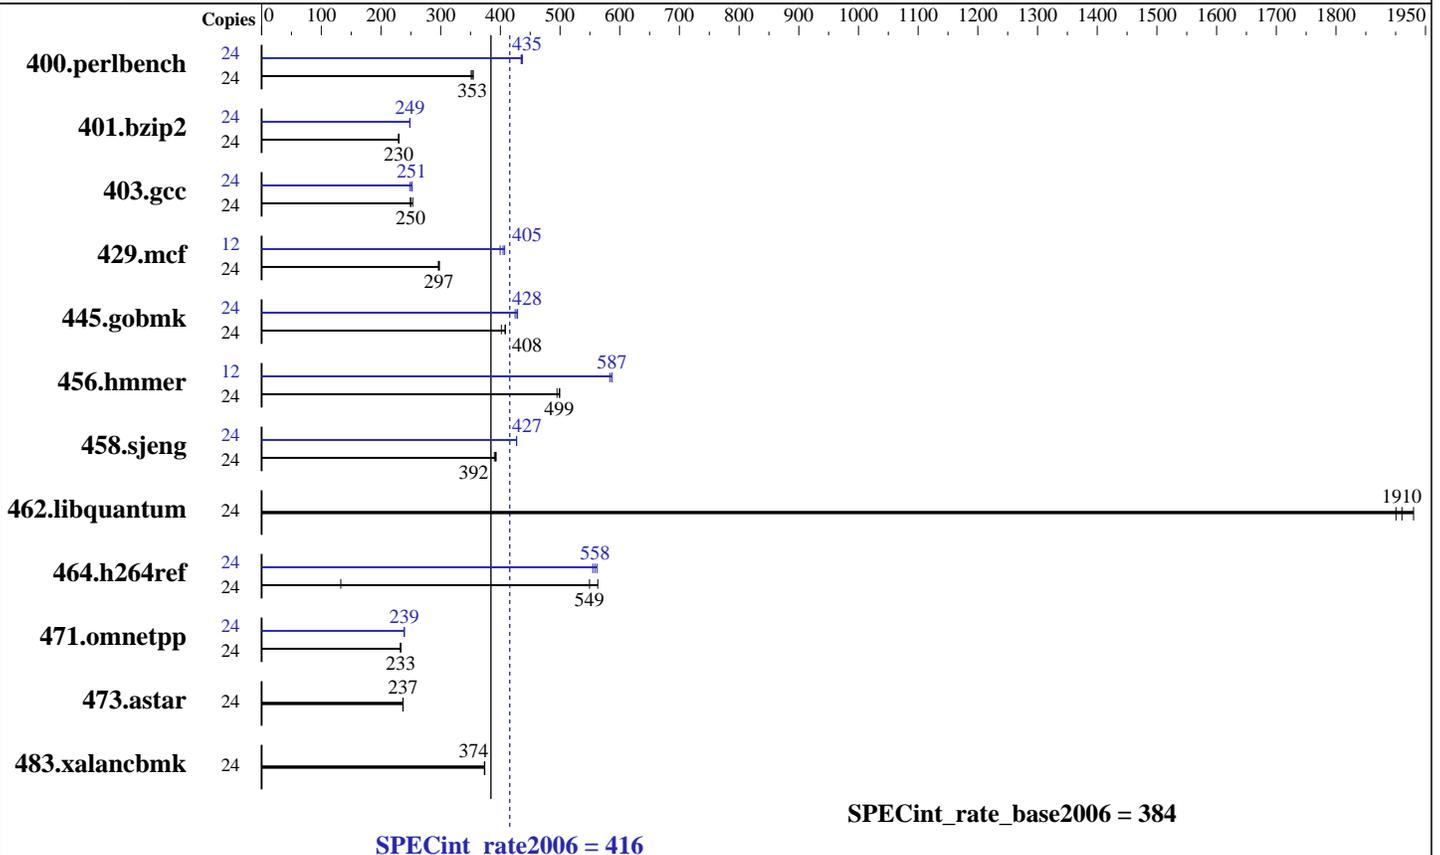

### Hardware

CPU Name: Intel Xeon X5690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
 CPU MHz: 3467  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 8.8 TB RAID 5  
 60 x 146 GB SAS (Seagate Cheetah 15k.5)  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.13-0.4-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: NFSv3 IPoIB  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SPECint\_rate2006 = 416

SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)

SPECint\_rate\_base2006 = 384

CPU2006 license: 4

Test date: Mar-2011

Test sponsor: SGI

Hardware Availability: Feb-2011

Tested by: SGI

Software Availability: Dec-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>665</b>	<b>353</b>	661	355	668	351	24	539	435	537	437	<b>539</b>	<b>435</b>
401.bzip2	24	1009	230	<b>1009</b>	<b>230</b>	1007	230	24	931	249	<b>932</b>	<b>249</b>	933	248
403.gcc	24	774	249	<b>774</b>	<b>250</b>	763	253	24	776	249	766	252	<b>768</b>	<b>251</b>
429.mcf	24	735	298	739	296	<b>737</b>	<b>297</b>	12	269	407	<b>270</b>	<b>405</b>	274	400
445.gobmk	24	616	408	<b>617</b>	<b>408</b>	627	402	24	<b>588</b>	<b>428</b>	587	429	593	425
456.hammer	24	448	499	452	495	<b>449</b>	<b>499</b>	12	<b>191</b>	<b>587</b>	192	583	191	587
458.sjeng	24	<b>741</b>	<b>392</b>	739	393	745	390	24	680	427	680	427	<b>680</b>	<b>427</b>
462.libquantum	24	258	1930	<b>260</b>	<b>1910</b>	262	1900	24	258	1930	<b>260</b>	<b>1910</b>	262	1900
464.h264ref	24	<b>967</b>	<b>549</b>	4003	133	943	563	24	945	562	<b>951</b>	<b>558</b>	957	555
471.omnetpp	24	<b>644</b>	<b>233</b>	644	233	644	233	24	<b>628</b>	<b>239</b>	628	239	628	239
473.astar	24	711	237	<b>711</b>	<b>237</b>	712	237	24	711	237	<b>711</b>	<b>237</b>	712	237
483.xalancbmk	24	443	374	444	373	<b>443</b>	<b>374</b>	24	443	374	444	373	<b>443</b>	<b>374</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Set 10800 in /proc/sys/vm/nr\_hugepages  
mount -t hugetlbfs nodev /tmp/hugepages

## General Notes

Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 416**

SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)

**SPECint\_rate\_base2006 = 384**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Dec-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 416**

SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)

**SPECint\_rate\_base2006 = 384**

**CPU2006 license:** 4

**Test date:** Mar-2011

**Test sponsor:** SGI

**Hardware Availability:** Feb-2011

**Tested by:** SGI

**Software Availability:** Dec-2010

## Peak Portability Flags (Continued)

456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 416**

SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)

**SPECint\_rate\_base2006 = 384**

**CPU2006 license:** 4

**Test date:** Mar-2011

**Test sponsor:** SGI

**Hardware Availability:** Feb-2011

**Tested by:** SGI

**Software Availability:** Dec-2010

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:50:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 April 2011.