



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C2112-4TY14 (Intel Xeon X5675, 3.07 GHz)

SPECint®\_rate2006 = 397

SPECint\_rate\_base2006 = 367

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

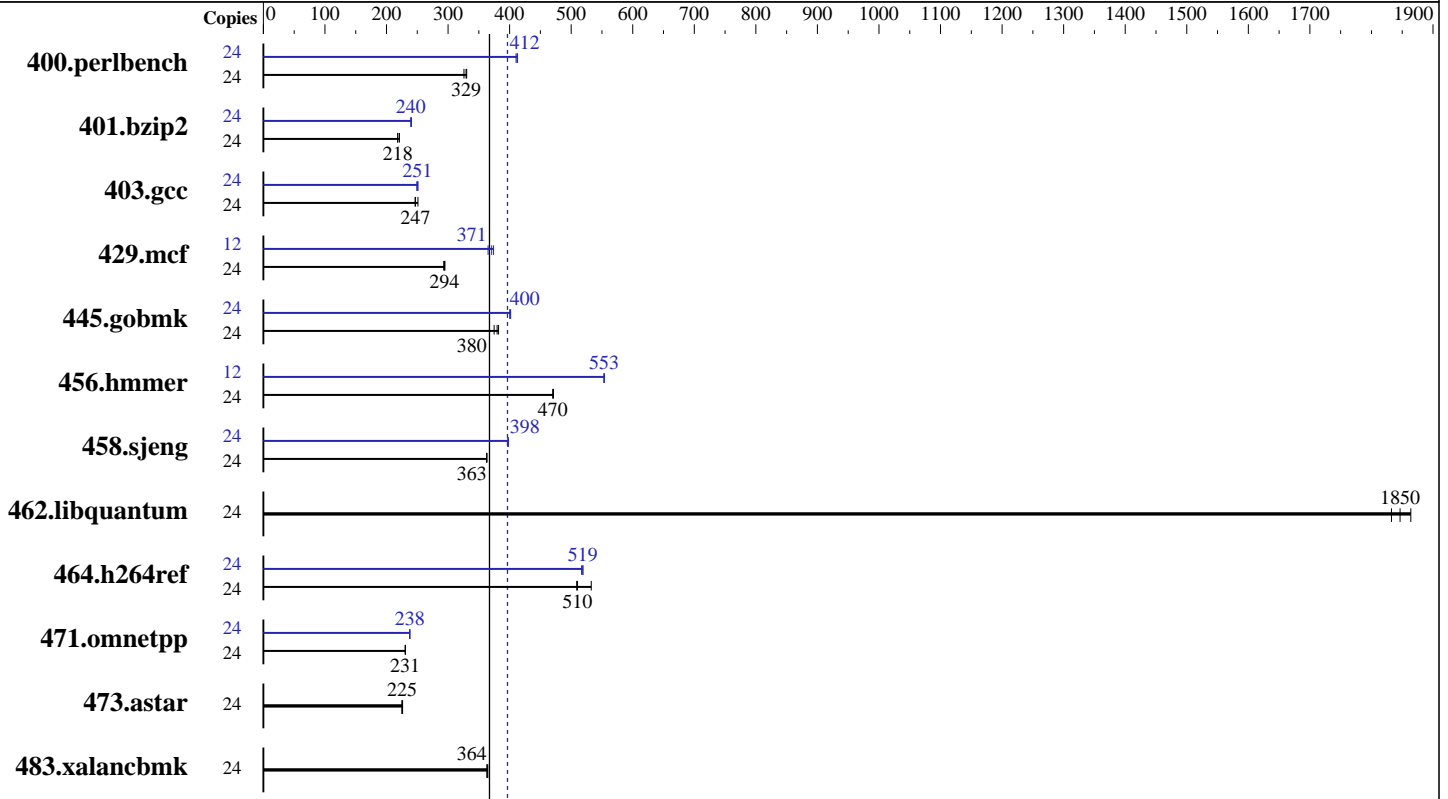

SPECint\_rate2006 = 397

SPECint\_rate\_base2006 = 367

### Hardware

CPU Name: Intel Xeon X5675  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
 CPU MHz: 3067  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 2 x 300 GB SATA, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, kernel 2.6.32.27-0.2-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C2112-4TY14 (Intel Xeon X5675, 3.07 GHz)

SPECint\_rate2006 = 397

SPECint\_rate\_base2006 = 367

CPU2006 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Mar-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	720	326	<u>712</u>	<u>329</u>	710	330	24	571	410	568	413	<u>569</u>	<u>412</u>
401.bzip2	24	1048	221	<u>1061</u>	<u>218</u>	1061	218	24	966	240	963	240	<u>966</u>	<u>240</u>
403.gcc	24	769	251	784	246	<u>782</u>	<u>247</u>	24	775	249	769	251	<u>771</u>	<u>251</u>
429.mcf	24	742	295	<u>744</u>	<u>294</u>	747	293	12	<u>295</u>	<u>371</u>	300	365	293	374
445.gobmk	24	659	382	<u>663</u>	<u>380</u>	672	375	24	<u>629</u>	<u>400</u>	627	402	629	400
456.hammer	24	475	471	<u>476</u>	<u>470</u>	476	470	12	202	553	<u>202</u>	<u>553</u>	202	554
458.sjeng	24	800	363	800	363	<u>800</u>	<u>363</u>	24	<u>730</u>	<u>398</u>	731	397	730	398
462.libquantum	24	267	1860	<u>269</u>	<u>1850</u>	271	1830	24	267	1860	<u>269</u>	<u>1850</u>	271	1830
464.h264ref	24	<u>1041</u>	<u>510</u>	1044	509	997	533	24	1028	517	<u>1024</u>	<u>519</u>	1023	519
471.omnetpp	24	650	231	651	231	<u>651</u>	<u>231</u>	24	630	238	631	238	<u>631</u>	<u>238</u>
473.astar	24	749	225	745	226	<u>747</u>	<u>225</u>	24	749	225	745	226	<u>747</u>	<u>225</u>
483.xalancbmk	24	<u>455</u>	<u>364</u>	454	365	456	363	24	<u>455</u>	<u>364</u>	454	365	456	363

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Set 10800 in /proc/sys/vm/nr\_hugepages  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**SGI**

SGI Rackable C2112-4TY14 (Intel Xeon X5675, 3.07 GHz)

**SPECint\_rate2006 = 397**

**SPECint\_rate\_base2006 = 367**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C2112-4TY14 (Intel Xeon X5675, 3.07 GHz)

SPECint\_rate2006 = 397

SPECint\_rate\_base2006 = 367

CPU2006 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Mar-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C2112-4TY14 (Intel Xeon X5675, 3.07 GHz)

SPECint\_rate2006 = 397

SPECint\_rate\_base2006 = 367

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:55:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 April 2011.