



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 23.6

PowerEdge R910 (Intel Xeon E7-4807, 1.87 GHz)

SPECint\_base2006 = 22.1

CPU2006 license: 55


Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

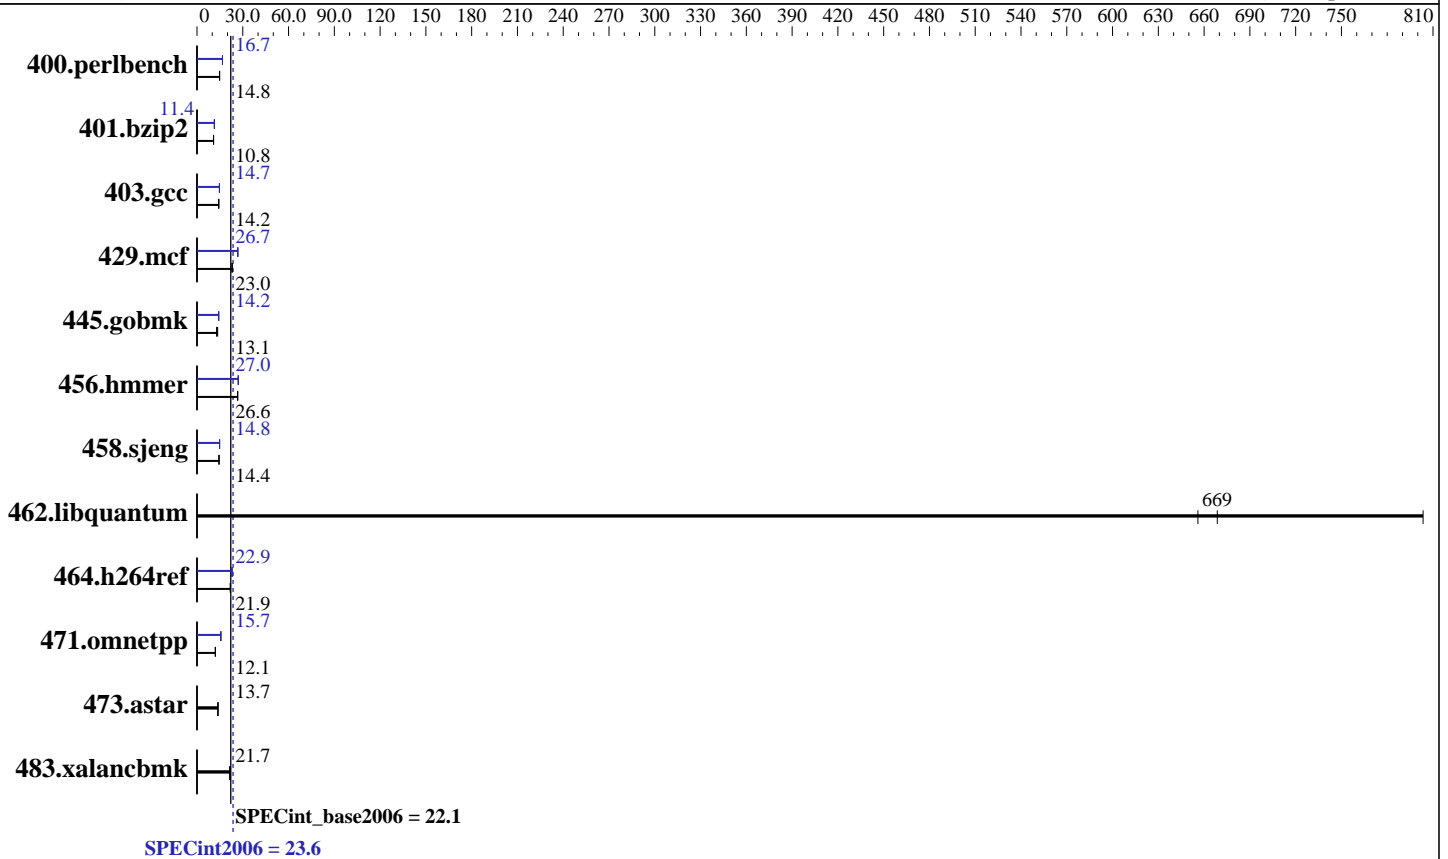

## Hardware

CPU Name: Intel Xeon E7-4807  
 CPU Characteristics: None  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 800 MHz)  
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

PowerEdge R910 (Intel Xeon E7-4807, 1.87 GHz)

SPECint\_base2006 = 22.1

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Mar-2011  
Hardware Availability: Apr-2011  
Software Availability: Apr-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	659	14.8	662	14.8	<b>660</b>	<b>14.8</b>	584	16.7	586	16.7	<b>586</b>	<b>16.7</b>
401.bzip2	889	10.8	<b>890</b>	<b>10.8</b>	890	10.8	845	11.4	849	11.4	<b>849</b>	<b>11.4</b>
403.gcc	566	14.2	564	14.3	<b>566</b>	<b>14.2</b>	548	14.7	<b>547</b>	<b>14.7</b>	547	14.7
429.mcf	395	23.1	397	23.0	<b>396</b>	<b>23.0</b>	340	26.8	<b>341</b>	<b>26.7</b>	342	26.7
445.gobmk	<b>801</b>	<b>13.1</b>	817	12.8	774	13.6	738	14.2	738	14.2	<b>738</b>	<b>14.2</b>
456.hammer	351	26.6	350	26.7	<b>350</b>	<b>26.6</b>	<b>345</b>	<b>27.0</b>	345	27.0	345	27.0
458.sjeng	838	14.4	<b>838</b>	<b>14.4</b>	839	14.4	816	14.8	818	14.8	<b>818</b>	<b>14.8</b>
462.libquantum	<b>31.0</b>	<b>669</b>	31.6	656	25.8	804	<b>31.0</b>	<b>669</b>	31.6	656	25.8	804
464.h264ref	<b>1012</b>	<b>21.9</b>	1010	21.9	1013	21.8	965	22.9	964	23.0	<b>965</b>	<b>22.9</b>
471.omnetpp	523	12.0	<b>518</b>	<b>12.1</b>	517	12.1	403	15.5	398	15.7	<b>399</b>	<b>15.7</b>
473.astar	<b>512</b>	<b>13.7</b>	513	13.7	509	13.8	<b>512</b>	<b>13.7</b>	513	13.7	509	13.8
483.xalancbmk	<b>318</b>	<b>21.7</b>	323	21.4	318	21.7	<b>318</b>	<b>21.7</b>	323	21.4	318	21.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. OMP\_NUM\_THREADS set to number of cores. Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

PowerEdge R910 (Intel Xeon E7-4807, 1.87 GHz)

SPECint\_base2006 = 22.1

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap64  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

PowerEdge R910 (Intel Xeon E7-4807, 1.87 GHz)

SPECint\_base2006 = 22.1

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

## Peak Compiler Invocation (Continued)

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

456.hammer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

-opt-prefetch -ansi-alias

-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32

-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc

-opt-malloc-options=3 -auto-ilp32

-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

-auto-ilp32 -ansi-alias

-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)

-auto-ilp32 -ansi-alias

-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

PowerEdge R910 (Intel Xeon E7-4807, 1.87 GHz)

SPECint\_base2006 = 22.1

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

PowerEdge R910 (Intel Xeon E7-4807, 1.87 GHz)

SPECint\_base2006 = 22.1

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 19:19:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 April 2011.