



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint[®]_rate2006 = 1890

PRIMERGY RX900 S2, Intel Xeon E7-8870, 2.40 GHz

SPECint_rate_base2006 = 1770

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Jun-2011

Software Availability: Nov-2010

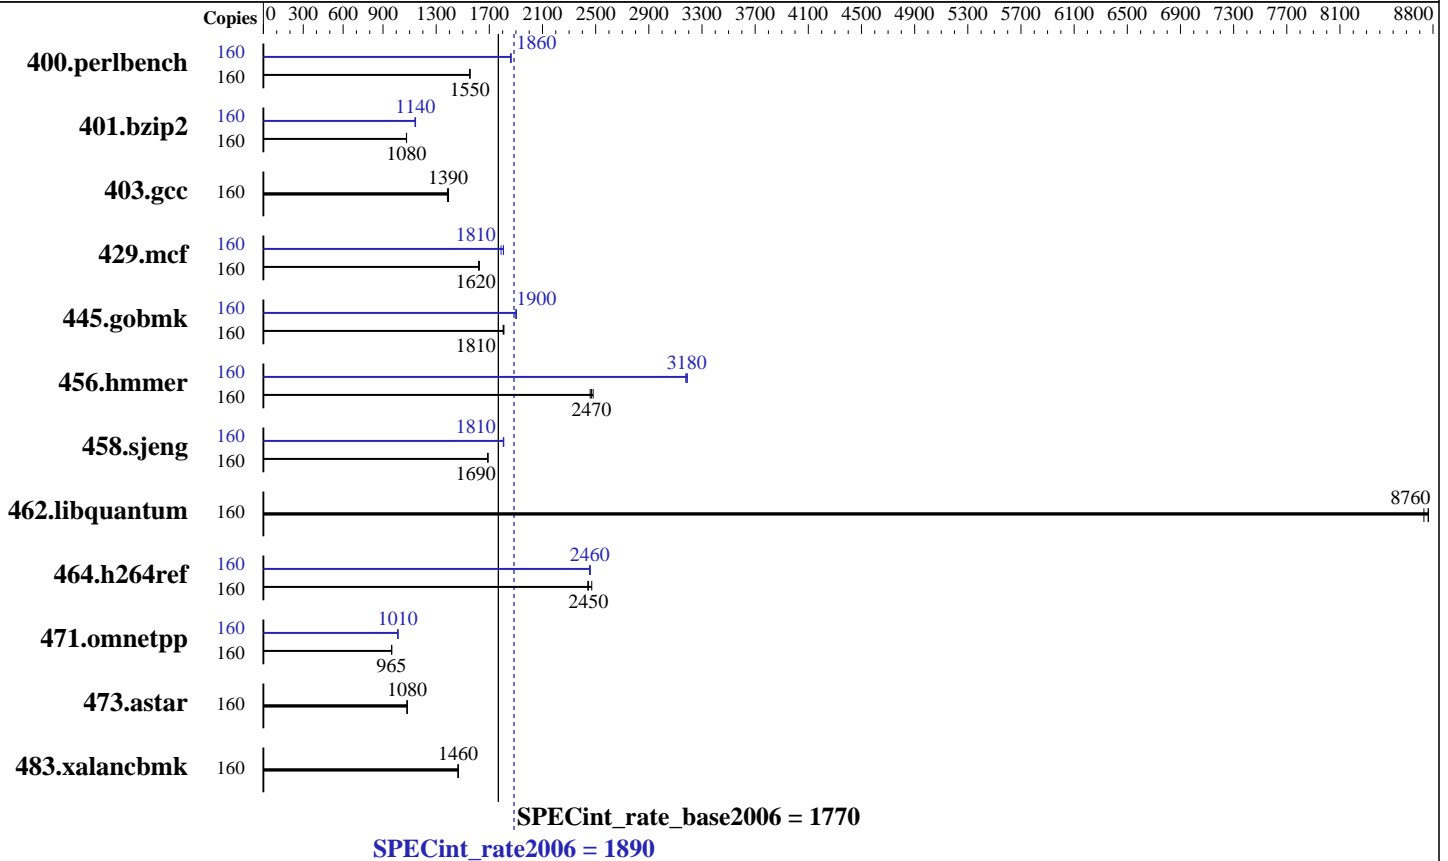

Hardware

CPU Name: Intel Xeon E7-8870
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 80 cores, 8 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 4,6,8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (128 x 8 GB 4Rx8 PC3-10600R-9, ECC, running at 1066 MHz)
 Disk Subsystem: 2 x 147 GB (SAS, 15000RPM, RAID0)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1(x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01 Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 1890

PRIMERGY RX900 S2, Intel Xeon E7-8870, 2.40 GHz

SPECint_rate_base2006 = 1770

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2011
Hardware Availability: Jun-2011
Software Availability: Nov-2010

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 160 | 1005 | 1560 | 1007 | 1550 | 1007 | 1550 | 160 | 838 | 1860 | 840 | 1860 | 840 | 1860 |
| 401.bzip2 | 160 | 1433 | 1080 | 1433 | 1080 | 1435 | 1080 | 160 | 1349 | 1140 | 1349 | 1140 | 1354 | 1140 |
| 403.gcc | 160 | 930 | 1380 | 926 | 1390 | 925 | 1390 | 160 | 930 | 1380 | 926 | 1390 | 925 | 1390 |
| 429.mcf | 160 | 900 | 1620 | 898 | 1630 | 901 | 1620 | 160 | 808 | 1810 | 816 | 1790 | 808 | 1810 |
| 445.gobmk | 160 | 930 | 1800 | 928 | 1810 | 928 | 1810 | 160 | 882 | 1900 | 881 | 1900 | 884 | 1900 |
| 456.hammer | 160 | 607 | 2460 | 602 | 2480 | 605 | 2470 | 160 | 469 | 3180 | 468 | 3190 | 470 | 3180 |
| 458.sjeng | 160 | 1148 | 1690 | 1145 | 1690 | 1146 | 1690 | 160 | 1072 | 1810 | 1072 | 1810 | 1070 | 1810 |
| 462.libquantum | 160 | 378 | 8770 | 380 | 8730 | 378 | 8760 | 160 | 378 | 8770 | 380 | 8730 | 378 | 8760 |
| 464.h264ref | 160 | 1447 | 2450 | 1451 | 2440 | 1433 | 2470 | 160 | 1443 | 2450 | 1439 | 2460 | 1442 | 2460 |
| 471.omnetpp | 160 | 1037 | 965 | 1036 | 965 | 1036 | 965 | 160 | 989 | 1010 | 987 | 1010 | 988 | 1010 |
| 473.astar | 160 | 1039 | 1080 | 1039 | 1080 | 1039 | 1080 | 160 | 1039 | 1080 | 1039 | 1080 | 1039 | 1080 |
| 483.xalancbmk | 160 | 754 | 1460 | 754 | 1460 | 752 | 1470 | 160 | 754 | 1460 | 754 | 1460 | 752 | 1470 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Large pages were not enabled for this run
The following command was used prior to run
ulimit -s unlimited
echo 1 > /proc/sys/vm/zone_reclaim_mode

Base Compiler Invocation

C benchmarks:
icc -m32
C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 1890

PRIMERGY RX900 S2, Intel Xeon E7-8870, 2.40 GHz

SPECint_rate_base2006 = 1770

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2011
Hardware Availability: Jun-2011
Software Availability: Nov-2010

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 1890

PRIMERGY RX900 S2, Intel Xeon E7-8870, 2.40 GHz

SPECint_rate_base2006 = 1770

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Jun-2011

Tested by: Fujitsu

Software Availability: Nov-2010

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 1890

PRIMERGY RX900 S2, Intel Xeon E7-8870, 2.40 GHz

SPECint_rate_base2006 = 1770

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Jun-2011

Tested by: Fujitsu

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

http://www.spec.org/cpu2006/flags/RX900S2_Platform.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

http://www.spec.org/cpu2006/flags/RX900S2_Platform.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:25:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2011.