



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 1150

IBM Power 750 Express (3.61 GHz, 32 core)

SPECint_rate_base2006 = 1010

CPU2006 license: 11


Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: May-2011

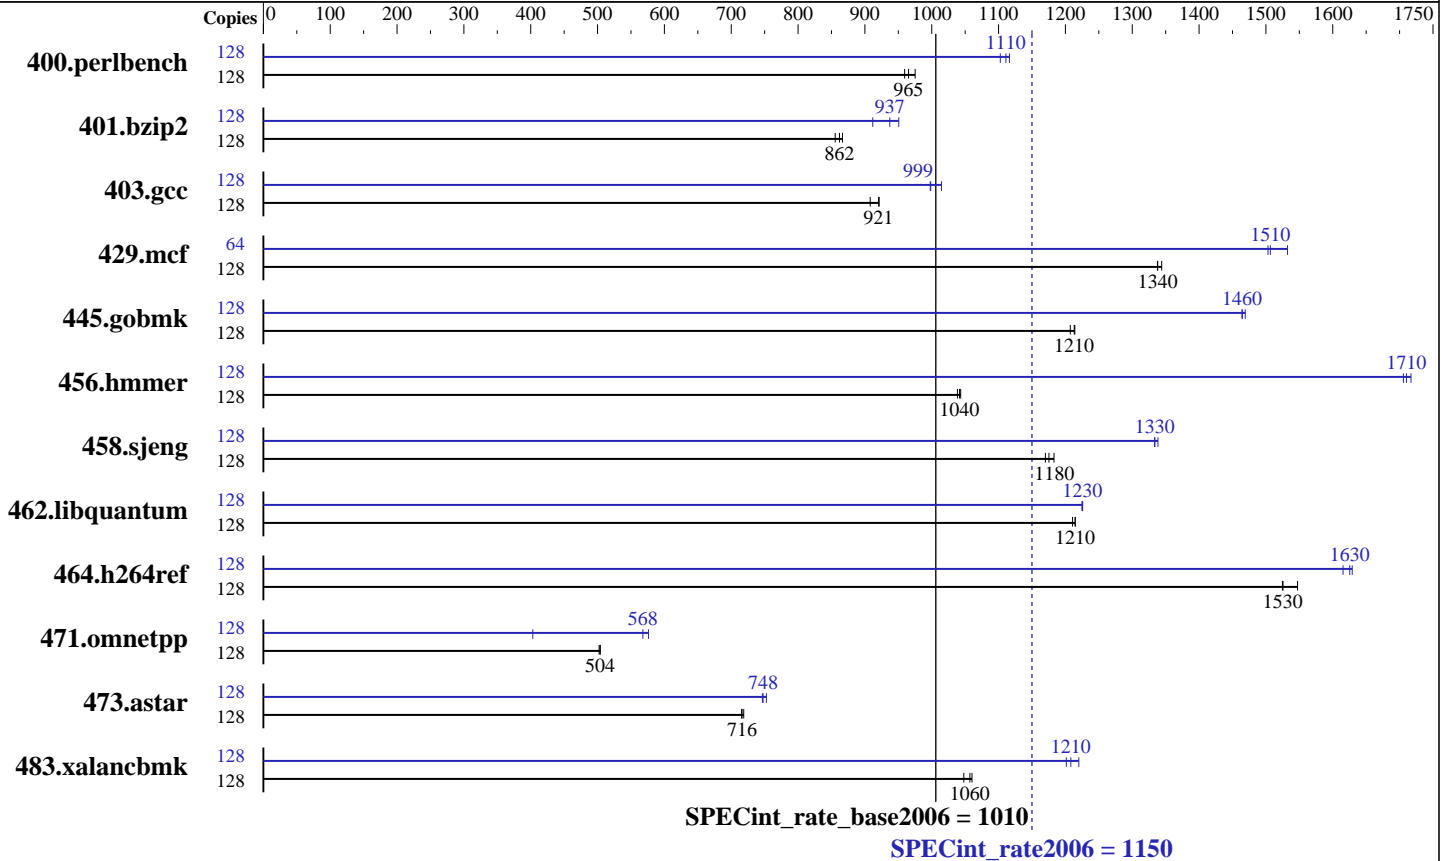

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz
 CPU MHz: 3612
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 8 - 32 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (32 x 8 GB) DDR3 1066 MHz
 Disk Subsystem: 6 x 146.8 GB Raid0 SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX V7.1 with Service Pack 3
 Compiler: IBM XL C/C++ for AIX, V11.1 Version: 11.01.0000.0005
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1150

IBM Power 750 Express (3.61 GHz, 32 core)

SPECint_rate_base2006 = 1010

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: May-2011

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|----------------|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 128 | 1303 | 959 | <u>1296</u> | <u>965</u> | 1282 | 975 | 128 | <u>1126</u> | <u>1110</u> | 1120 | 1120 | 1134 | 1100 |
| 401.bzip2 | 128 | 1444 | 856 | <u>1433</u> | <u>862</u> | 1426 | 866 | 128 | 1299 | 951 | <u>1318</u> | <u>937</u> | 1355 | 912 |
| 403.gcc | 128 | 1135 | 908 | <u>1119</u> | <u>921</u> | 1118 | 921 | 128 | <u>1032</u> | <u>999</u> | 1033 | 998 | 1016 | 1010 |
| 429.mcf | 128 | 873 | 1340 | 869 | 1340 | <u>872</u> | <u>1340</u> | 64 | 388 | 1500 | 381 | 1530 | <u>387</u> | <u>1510</u> |
| 445.gobmk | 128 | <u>1107</u> | <u>1210</u> | 1106 | 1210 | 1112 | 1210 | 128 | <u>917</u> | <u>1460</u> | 917 | 1460 | 914 | 1470 |
| 456.hmmer | 128 | <u>1147</u> | <u>1040</u> | 1145 | 1040 | 1150 | 1040 | 128 | <u>698</u> | <u>1710</u> | 700 | 1710 | 696 | 1720 |
| 458.sjeng | 128 | <u>1318</u> | <u>1180</u> | 1309 | 1180 | 1324 | 1170 | 128 | <u>1161</u> | <u>1330</u> | 1157 | 1340 | 1162 | 1330 |
| 462.libquantum | 128 | 2191 | 1210 | 2183 | 1210 | <u>2184</u> | <u>1210</u> | 128 | <u>2164</u> | <u>1230</u> | 2166 | 1220 | 2164 | 1230 |
| 464.h264ref | 128 | 1831 | 1550 | <u>1857</u> | <u>1530</u> | 1858 | 1520 | 128 | 1739 | 1630 | <u>1743</u> | <u>1630</u> | 1753 | 1620 |
| 471.omnetpp | 128 | 1593 | 502 | <u>1588</u> | <u>504</u> | 1587 | 504 | 128 | <u>1409</u> | <u>568</u> | 1985 | 403 | 1388 | 576 |
| 473.astar | 128 | <u>1255</u> | <u>716</u> | 1250 | 719 | 1256 | 716 | 128 | <u>1202</u> | <u>748</u> | 1204 | 747 | 1194 | 753 |
| 483.xalancbmk | 128 | 833 | 1060 | 843 | 1050 | <u>835</u> | <u>1060</u> | 128 | 735 | 1200 | <u>731</u> | <u>1210</u> | 724 | 1220 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for:
 401.bzip2 473.astar with options:
 -O4 -vrox -m power7
 403.gcc 445.gobmk 458.sjeng with options:
 -O3 -m power7
 429.mcf 483.xalancbmk with options:
 -O4 -nobp -m power7
 456.hmmer 462.libquantum with options:
 -O3 -lu -1 -nodp -sdp 9 -m power7
 464.h264ref with options:
 -O4 -vrox -RD -m power7

Submit Notes

The config file option 'submit' was used
 to assign benchmark copy to specific kernel thread using
 the "bindprocessor" command (see flags file for details).

Operating System Notes

All ulimits set to unlimited.
 12800 16M large pages defined with vmo command



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1150

IBM Power 750 Express (3.61 GHz, 32 core)

SPECint_rate_base2006 = 1010

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: May-2011

General Notes

Environment variables set by runspec before the start of the run:

```
MALLOCOPTIONS = "pool"  
MEMORY_AFFINITY = "MCM"  
XLFRTEOPTS = "intrinthds=1"
```

The "IBM Power 750 Express (3.61 GHz)" and the "IBM Power 755 (3.61 GHz)" are electronically equivalent. The results have been measured on the "IBM Power Express 750 (3.61 GHz)".

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlC
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX  
462.libquantum: -DSPEC_CPU_AIX  
464.h264ref: -DSPEC_CPU_AIX -qchars=signed  
483.xalancbmk: -DSPEC_CPU_AIX
```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -D_ILS_MACROS  
-qalias=noansi -qalloca -blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -qsimd -qvecnvoll  
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1150

IBM Power 750 Express (3.61 GHz, 32 core)

SPECint_rate_base2006 = 1010

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: May-2011

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalanbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -D_ILS_MACROS -qalias=noansi
-blpdata -btextpsize:64K
401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K
403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -qalloca -blpdata -btextpsize:64K
429.mcf: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnv1 -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K
445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K
456.hmmr: -qipa=threads -O5 -qsimd -qvecnv1 -qassert=refalign
-D_ILS_MACROS -blpdata -btextpsize:64K
458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K
462.libquantum: -O5 -q64 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1150

IBM Power 750 Express (3.61 GHz, 32 core)

SPECint_rate_base2006 = 1010

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: May-2011

Peak Optimization Flags (Continued)

464.h264ref: Same as 458.sjeng

C++ benchmarks:

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -D_ILS_MACROS -qalign=natural
-qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -qsimd -qvecnvoll -qlargepage
-D_ILS_MACROS -qinlglue -qalign=natural -blpdata
-btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -qsimd -qvecnvoll -qarch=pwr5
-qtune=pwr5 -qlargepage -D_ILS_MACROS -qinlglue
-D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

462.libquantum: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1150

IBM Power 750 Express (3.61 GHz, 32 core)

SPECint_rate_base2006 = 1010

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: May-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:01:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 April 2011.