



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]_rate2006 = 113

Intel DH67BLB3 Motherboard (Intel Core i7-2600)

SPECfp_rate_base2006 = 111

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

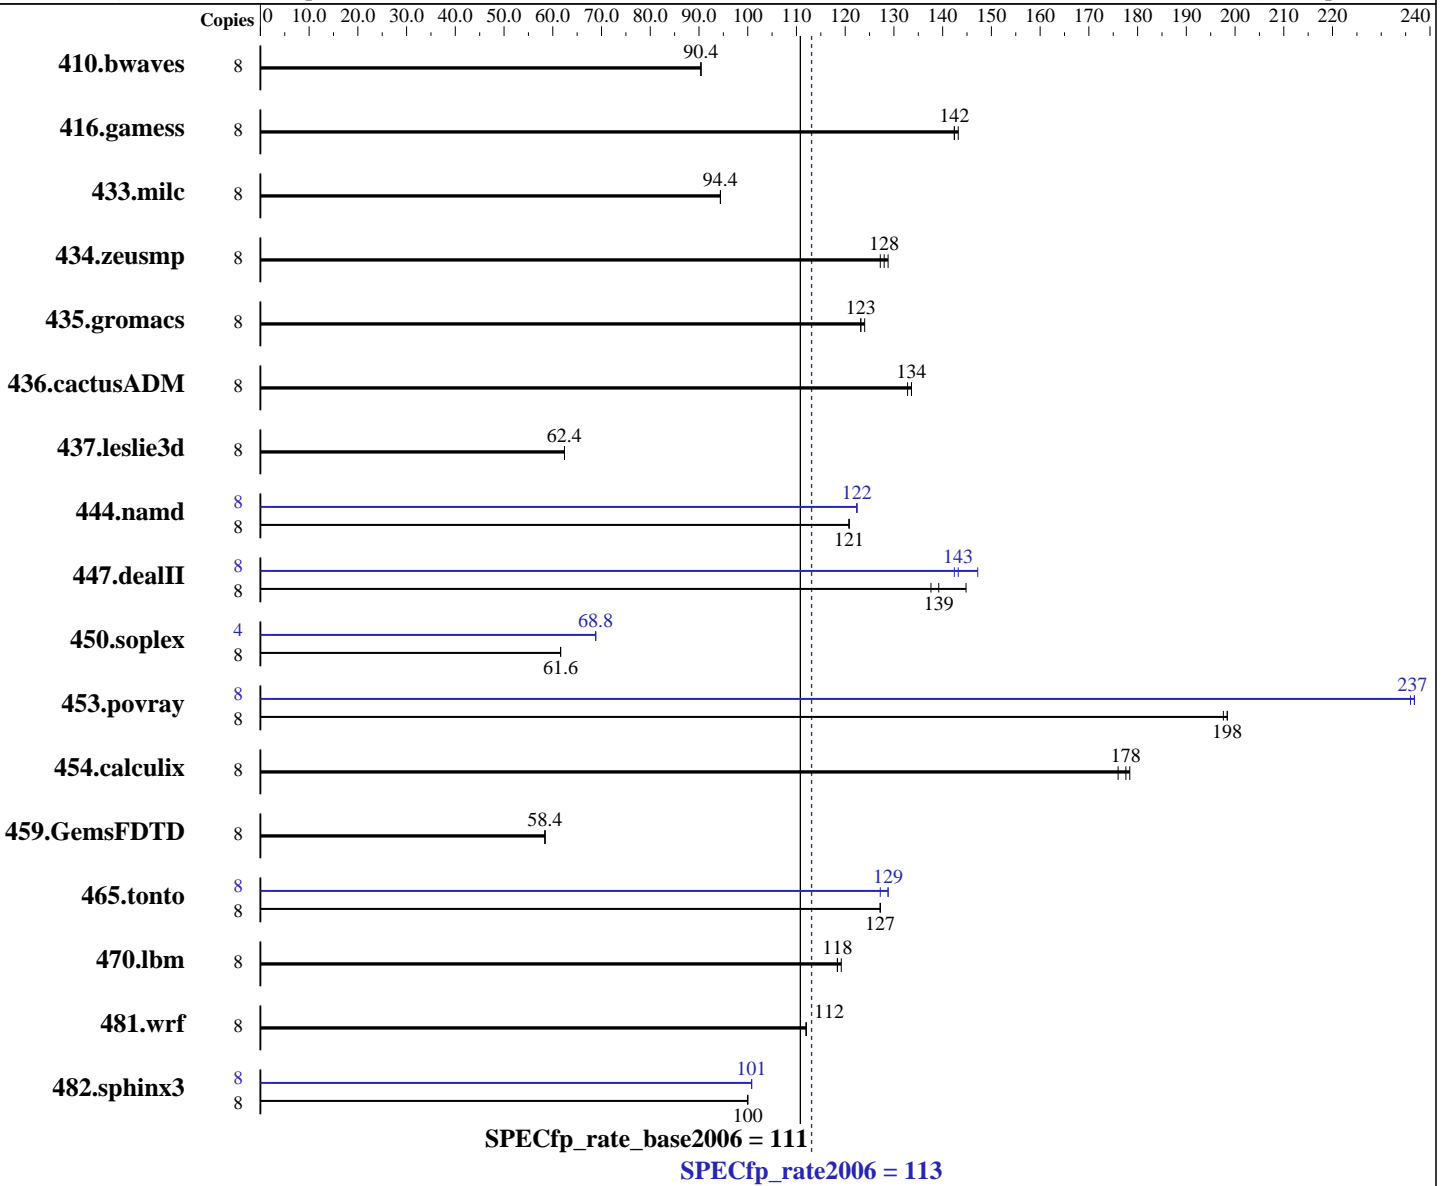

Hardware

CPU Name: Intel Core i7-2600
 CPU Characteristics: Intel Turbo Boost Technology up to 3.8 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for Intel64
 Version 12.0.3.163 Build 20110217
 Intel Visual Fortran Compiler XE for Intel64
 Version 12.0.0.104 Build 20101006
 Microsoft Visual Studio 2008 Professional SP1
 (for libraries)

Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 113

Intel DH67BLB3 Motherboard (Intel Core i7-2600)

SPECfp_rate_base2006 = 111

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1205	90.4	1205	90.4	1206	90.4	8	1205	90.4	1205	90.4	1206	90.4
416.gamess	8	1096	143	1100	142	1102	142	8	1096	143	1100	142	1102	142
433.milc	8	776	94.4	777	94.4	777	94.4	8	776	94.4	777	94.4	777	94.4
434.zeusmp	8	573	127	568	128	565	129	8	573	127	568	128	565	129
435.gromacs	8	462	124	462	123	463	123	8	462	124	462	123	463	123
436.cactusADM	8	714	134	715	134	718	133	8	714	134	715	134	718	133
437.leslie3d	8	1199	62.4	1203	62.4	1205	62.4	8	1199	62.4	1203	62.4	1205	62.4
444.namd	8	530	121	531	121	530	121	8	525	122	526	122	525	122
447.dealII	8	667	138	659	139	632	145	8	640	143	644	142	623	147
450.soplex	8	1085	61.6	1090	61.6	1089	61.6	4	485	68.8	485	68.8	485	68.8
453.povray	8	216	198	215	198	214	198	8	180	237	180	237	180	236
454.calculix	8	375	176	371	178	371	178	8	375	176	371	178	371	178
459.GemsFDTD	8	1459	58.4	1461	58.4	1461	58.4	8	1459	58.4	1461	58.4	1461	58.4
465.tonto	8	621	127	618	127	620	127	8	612	129	617	127	612	129
470.lbm	8	924	119	926	118	926	118	8	924	119	926	118	926	118
481.wrf	8	797	112	800	112	799	112	8	797	112	800	112	799	112
482.sphinx3	8	1560	100	1561	100	1562	100	8	1547	101	1549	101	1549	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 113

Intel DH67BLB3 Motherboard (Intel Core i7-2600)

SPECfp_rate_base2006 = 111

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlw64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 113

Intel DH67BLB3 Motherboard (Intel Core i7-2600)

SPECfp_rate_base2006 = 111

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

447.dealII: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep-
-Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000
shlw64M.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 113

Intel DH67BLB3 Motherboard (Intel Core i7-2600)

SPECfp_rate_base2006 = 111

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:48:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 April 2011.