



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 261

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 254

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

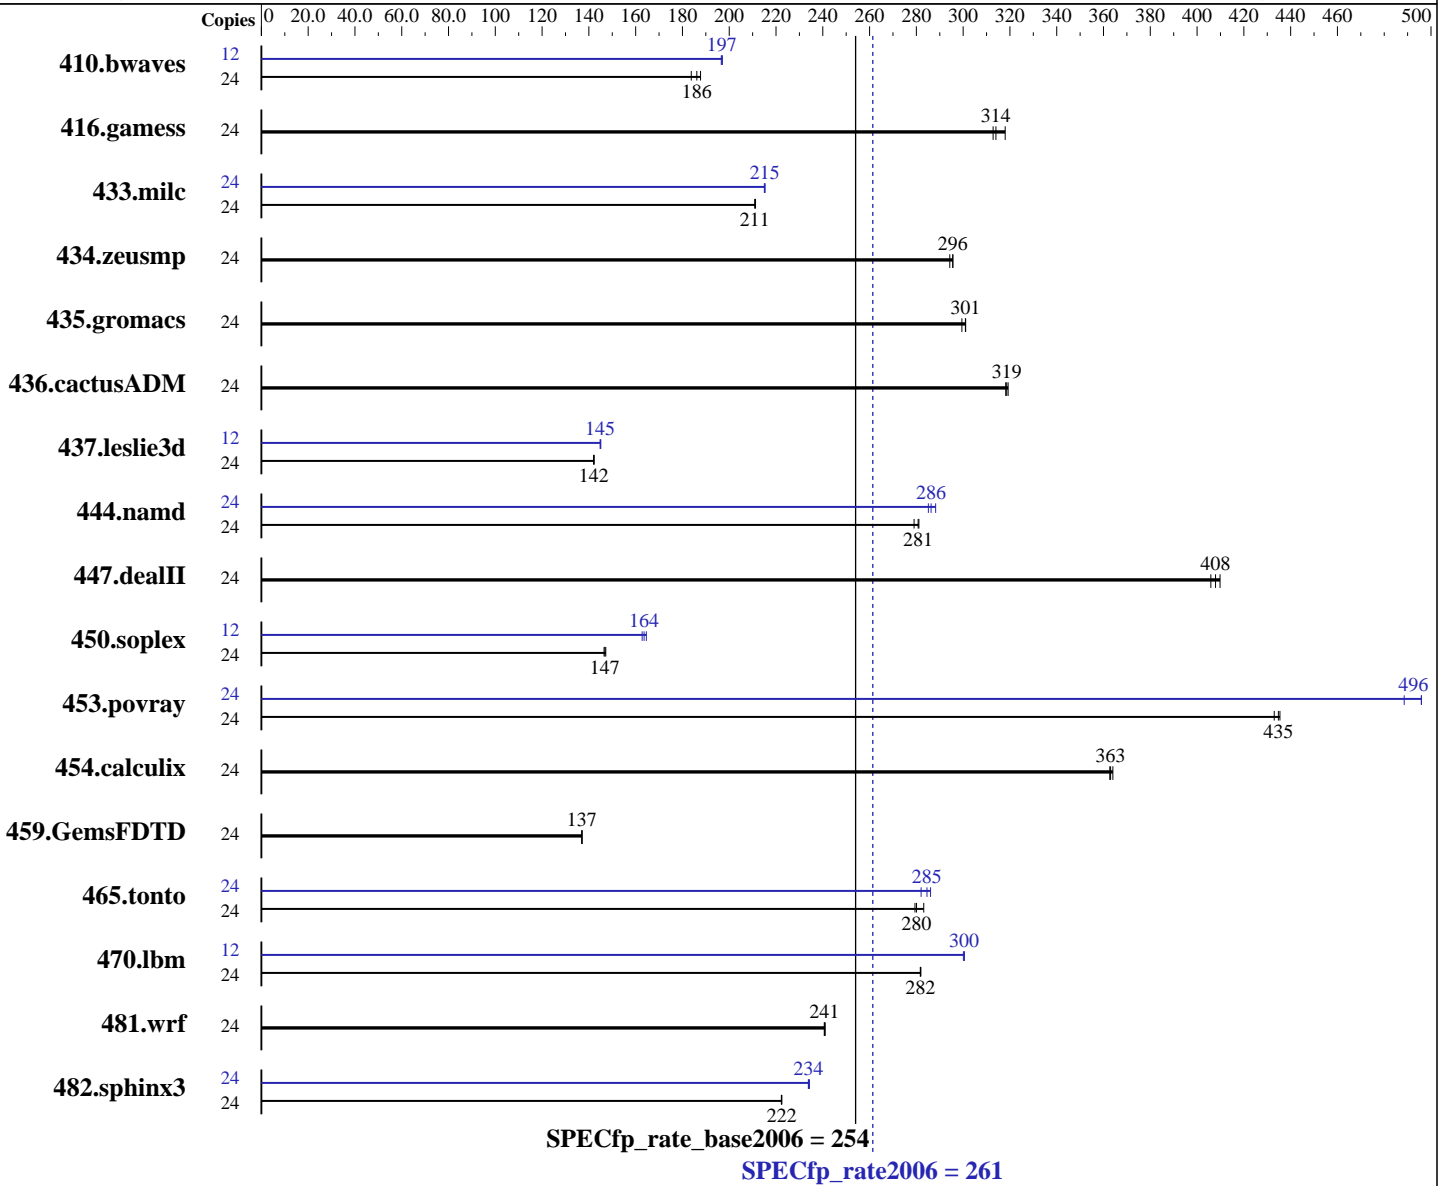

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 261

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 254

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SAS, 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<u>1752</u>	<u>186</u>	1775	184	1737	188	12	827	197	<u>828</u>	<u>197</u>	830	197
416.gamess	24	1502	313	1478	318	<u>1497</u>	<u>314</u>	24	1502	313	1478	318	<u>1497</u>	<u>314</u>
433.milc	24	1043	211	1044	211	<u>1044</u>	<u>211</u>	24	<u>1024</u>	<u>215</u>	1023	215	1025	215
434.zeusmp	24	739	296	742	294	<u>739</u>	<u>296</u>	24	739	296	742	294	<u>739</u>	<u>296</u>
435.gromacs	24	569	301	572	299	<u>569</u>	<u>301</u>	24	569	301	572	299	<u>569</u>	<u>301</u>
436.cactusADM	24	<u>900</u>	<u>319</u>	901	318	898	319	24	<u>900</u>	<u>319</u>	901	318	898	319
437.leslie3d	24	<u>1587</u>	<u>142</u>	1586	142	1589	142	12	779	145	<u>779</u>	<u>145</u>	777	145
444.namd	24	690	279	<u>686</u>	<u>281</u>	685	281	24	668	288	<u>672</u>	<u>286</u>	675	285
447.dealII	24	676	406	670	410	<u>673</u>	<u>408</u>	24	676	406	670	410	<u>673</u>	<u>408</u>
450.soplex	24	<u>1363</u>	<u>147</u>	1360	147	1366	146	12	615	163	<u>612</u>	<u>164</u>	608	165
453.povray	24	<u>294</u>	<u>435</u>	295	433	293	435	24	257	496	<u>257</u>	<u>496</u>	261	489
454.calculix	24	<u>545</u>	<u>363</u>	544	364	546	363	24	<u>545</u>	<u>363</u>	544	364	546	363
459.GemsFDTD	24	1858	137	1859	137	<u>1858</u>	<u>137</u>	24	1858	137	1859	137	<u>1858</u>	<u>137</u>
465.tonto	24	834	283	<u>843</u>	<u>280</u>	845	279	24	837	282	<u>830</u>	<u>285</u>	826	286
470.lbm	24	1170	282	<u>1170</u>	<u>282</u>	1171	282	12	<u>549</u>	<u>300</u>	549	300	549	301
481.wrf	24	<u>1113</u>	<u>241</u>	1112	241	1114	241	24	<u>1113</u>	<u>241</u>	1112	241	1114	241
482.sphinx3	24	2104	222	2103	222	<u>2103</u>	<u>222</u>	24	1996	234	<u>2000</u>	<u>234</u>	2000	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 >/proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 261

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 254

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Platform Notes

Data Reuse Optimization disabled in BIOS Setup.

General Notes

Binaries compiled on RHEL 5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 261

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 254

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Base Optimization Flags (Continued)

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static
Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
482.sphinx3: icc -m32
C++ benchmarks (except as noted below):
icpc -m64
450.soplex: icpc -m32
Fortran benchmarks:
ifort -m64
Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 261

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 254

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 261

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 254

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:07:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2011.