



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

**SPECint®2006 = 43.0**

Sun Fire X4170 M2 (Intel Xeon X5675 3.06 GHz)

**SPECint\_base2006 = 40.8**

CPU2006 license: 6


Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

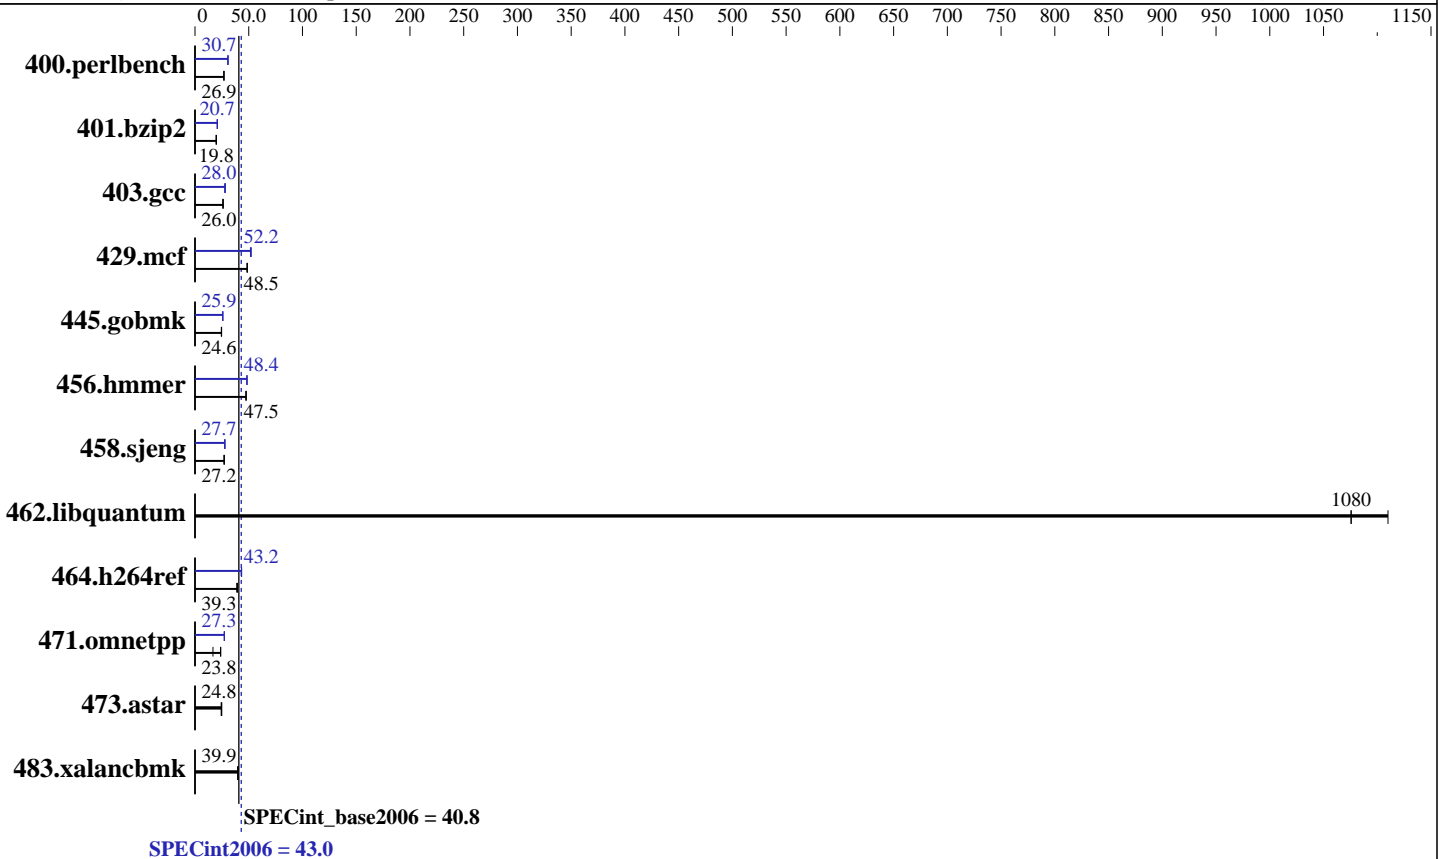

### Hardware

CPU Name: Intel Xeon X5675  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
 CPU MHz: 3067  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS2  
 Other Hardware: None

### Software

Operating System: Oracle Linux 5.5  
 kernel 2.6.18-194.el5  
 Compiler: Intel C++ Compiler XE for applications running on IA-32  
 Version 12.0.1.116 Build 20101116  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 43.0

Sun Fire X4170 M2 (Intel Xeon X5675 3.06 GHz)

SPECint\_base2006 = 40.8

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: May-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	363	26.9	<b>363</b>	<b>26.9</b>	363	26.9	319	30.6	<b>319</b>	<b>30.7</b>	318	30.7
401.bzip2	488	19.8	487	19.8	<b>487</b>	<b>19.8</b>	<b>465</b>	<b>20.7</b>	466	20.7	464	20.8
403.gcc	310	25.9	306	26.3	<b>309</b>	<b>26.0</b>	291	27.7	<b>288</b>	<b>28.0</b>	285	28.2
429.mcf	<b>188</b>	<b>48.5</b>	188	48.5	188	48.6	177	51.6	<b>175</b>	<b>52.2</b>	175	52.2
445.gobmk	423	24.8	427	24.5	<b>427</b>	<b>24.6</b>	406	25.9	406	25.8	<b>406</b>	<b>25.9</b>
456.hammer	196	47.5	196	47.5	<b>196</b>	<b>47.5</b>	<b>193</b>	<b>48.4</b>	193	48.4	193	48.3
458.sjeng	445	27.2	<b>445</b>	<b>27.2</b>	447	27.1	436	27.7	435	27.8	<b>436</b>	<b>27.7</b>
462.libquantum	18.7	1110	<b>19.3</b>	<b>1080</b>	19.3	1080	18.7	1110	<b>19.3</b>	<b>1080</b>	19.3	1080
464.h264ref	561	39.5	569	38.9	<b>563</b>	<b>39.3</b>	<b>512</b>	<b>43.2</b>	509	43.4	512	43.2
471.omnetpp	374	16.7	261	24.0	<b>263</b>	<b>23.8</b>	229	27.3	<b>229</b>	<b>27.3</b>	229	27.3
473.astar	288	24.3	283	24.8	<b>283</b>	<b>24.8</b>	288	24.3	283	24.8	<b>283</b>	<b>24.8</b>
483.xalancbmk	<b>173</b>	<b>39.9</b>	174	39.7	172	40.1	<b>173</b>	<b>39.9</b>	174	39.7	172	40.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
'nudev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

```
Load Default BIOS Settings and then change the following
Hardware Prefetch Enabled
Adjacent Cache Line Prefetch Enabled
L1 Data Prefetch Enabled
Data Reuse Optimization Enabled
Intel Hyperthreading Options Disabled
```

## General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
```

Binaries were compiled on RHEL5.5 with Binutils binutils-2.17.50.0.6-14.el5

This result is measured on Sun Fire X4170 M2 server.  
Note that the Sun Fire X4170 M2 server and Sun Fire X4270 M2 server are electrically equivalent.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 43.0

Sun Fire X4170 M2 (Intel Xeon X5675 3.06 GHz)

SPECint\_base2006 = 40.8

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap64  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 43.0

Sun Fire X4170 M2 (Intel Xeon X5675 3.06 GHz)

SPECint\_base2006 = 40.8

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc -opt-malloc-options=3 -auto-ilp32 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

429.mcf: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 43.0

Sun Fire X4170 M2 (Intel Xeon X5675 3.06 GHz)

SPECint\_base2006 = 40.8

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

## Peak Optimization Flags (Continued)

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.20110622.html](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110622.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.20110622.xml](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110622.xml)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 43.0

Sun Fire X4170 M2 (Intel Xeon X5675 3.06 GHz)

SPECint\_base2006 = 40.8

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: May-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 17:38:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 June 2011.