



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 235

PowerEdge M915 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint\_rate\_base2006 = 204

CPU2006 license: 55


Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Jun-2011

Tested by: Dell Inc.

Software Availability: Jul-2010

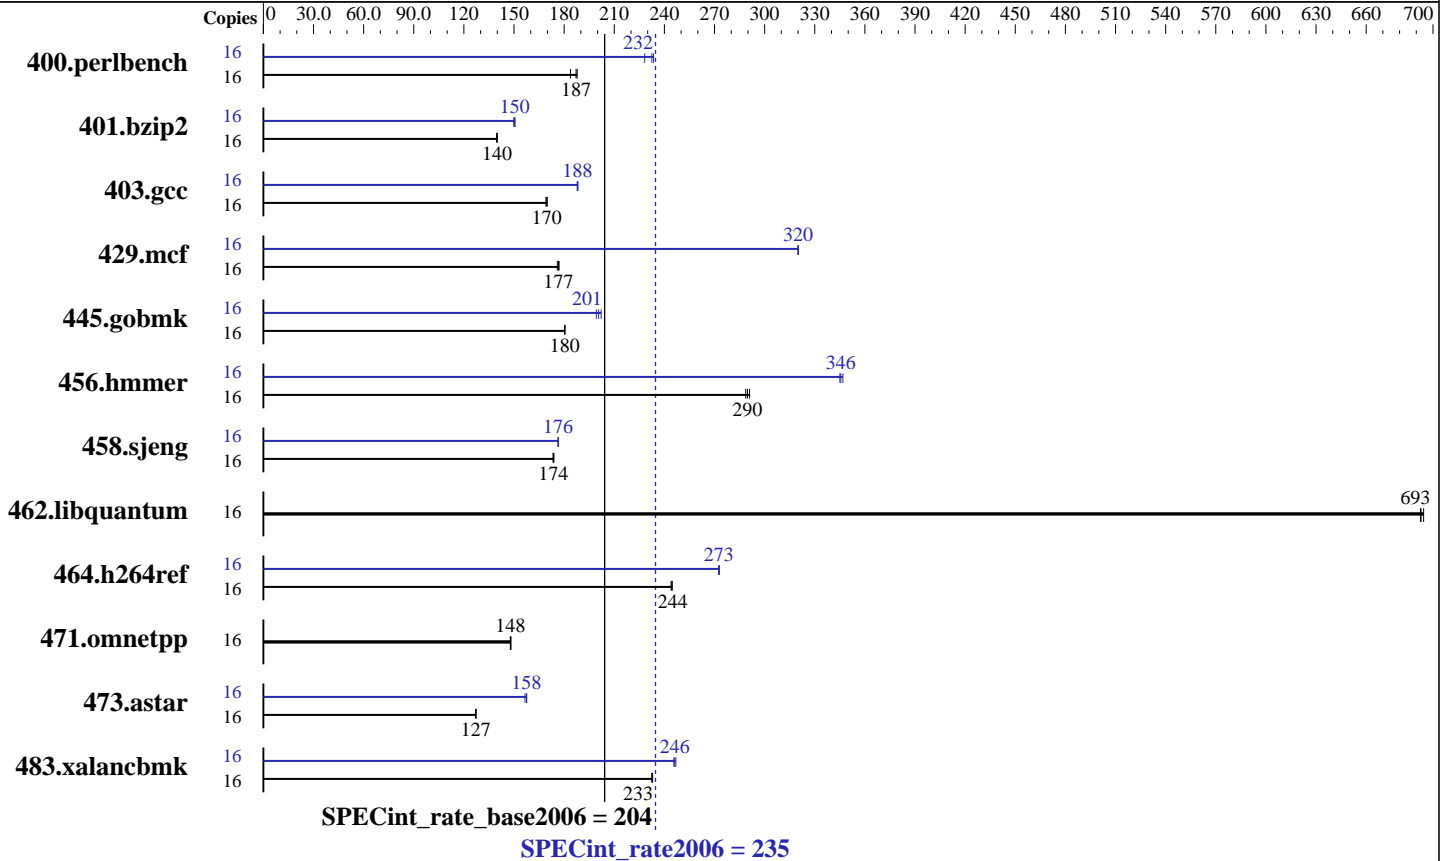

### Hardware

CPU Name: AMD Opteron 6124 HE  
 CPU Characteristics: 1800  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3L-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 10000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 235

PowerEdge M915 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint\_rate\_base2006 = 204

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: May-2011  
Hardware Availability: Jun-2011  
Software Availability: Jul-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	851	184	<b>835</b>	<b>187</b>	832	188	16	685	228	669	234	<b>672</b>	<b>232</b>
401.bzip2	16	1106	140	<b>1104</b>	<b>140</b>	1103	140	16	1030	150	1025	151	<b>1027</b>	<b>150</b>
403.gcc	16	758	170	<b>760</b>	<b>170</b>	762	169	16	<b>685</b>	<b>188</b>	684	188	686	188
429.mcf	16	<b>826</b>	<b>177</b>	825	177	829	176	16	456	320	<b>456</b>	<b>320</b>	456	320
445.gobmk	16	931	180	930	180	<b>930</b>	<b>180</b>	16	830	202	<b>837</b>	<b>201</b>	842	199
456.hammer	16	513	291	517	289	<b>515</b>	<b>290</b>	16	433	345	430	347	<b>432</b>	<b>346</b>
458.sjeng	16	<b>1115</b>	<b>174</b>	1113	174	1117	173	16	<b>1097</b>	<b>176</b>	1098	176	1097	177
462.libquantum	16	<b>478</b>	<b>693</b>	477	694	479	693	16	<b>478</b>	<b>693</b>	477	694	479	693
464.h264ref	16	<b>1449</b>	<b>244</b>	1447	245	1451	244	16	<b>1299</b>	<b>273</b>	1297	273	1299	273
471.omnetpp	16	677	148	<b>676</b>	<b>148</b>	675	148	16	677	148	<b>676</b>	<b>148</b>	675	148
473.astar	16	<b>883</b>	<b>127</b>	884	127	882	127	16	717	157	713	158	<b>713</b>	<b>158</b>
483.xalancbmk	16	475	232	474	233	<b>475</b>	<b>233</b>	16	<b>448</b>	<b>246</b>	449	246	447	247

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1./amd1002-rate-libs-revC/64:/root/cpu2006-1.1./amd1002-rate-libs-revC/32"  
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>  
Binaries were compiled on SLES10 SP2 with binutils 2.18

## Base Compiler Invocation

C benchmarks:  
opencc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 235

PowerEdge M915 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint\_rate\_base2006 = 204

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Jun-2011

Tested by: Dell Inc.

Software Availability: Jul-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 235

PowerEdge M915 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint\_rate\_base2006 = 204

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Jun-2011

Tested by: Dell Inc.

Software Availability: Jul-2010

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
 -LNO:ignore\_feedback=off -CG:p2align=on  
 -CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:local\_sched\_alg=1 -CG:cflow=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
 -HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 235

PowerEdge M915 (AMD Opteron 6124 HE, 1.80 GHz)

SPECint\_rate\_base2006 = 204

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Jun-2011

Tested by: Dell Inc.

Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

458.sjeng (continued):

-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 21:45:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 July 2011.