



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company


SPECint®\_rate2006 = 795

ProLiant DL580 G7  
(2.13 GHz, Intel Xeon E7-4830)

SPECint\_rate\_base2006 = 745

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jul-2011  
Hardware Availability: Apr-2011  
Software Availability: Dec-2010

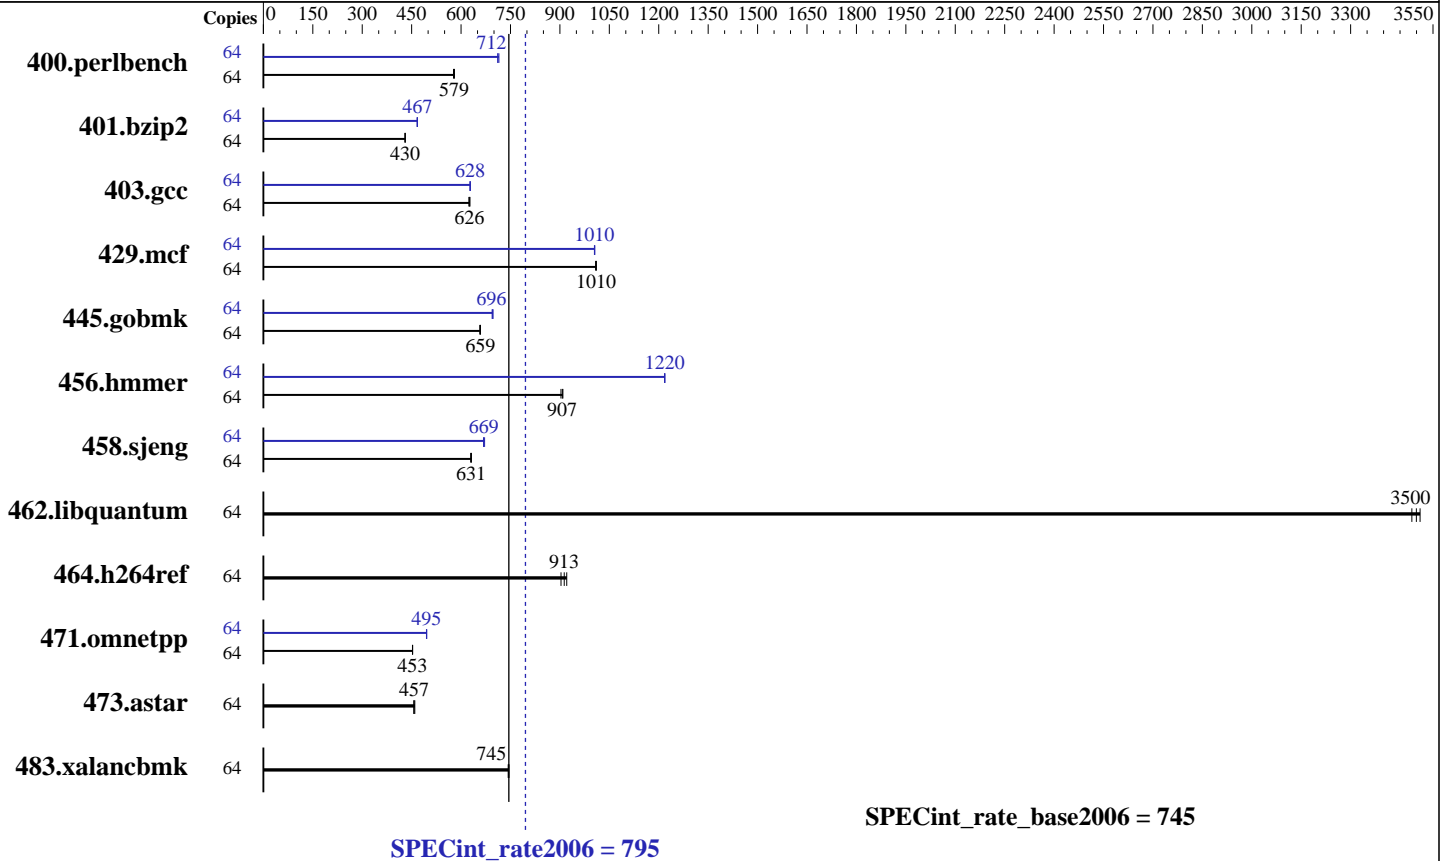

### Hardware

CPU Name: Intel Xeon E7-4830  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (64 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz)  
 Disk Subsystem: 1 x 146 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 795

ProLiant DL580 G7  
(2.13 GHz, Intel Xeon E7-4830)

SPECint\_rate\_base2006 = 745

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jul-2011  
Hardware Availability: Apr-2011  
Software Availability: Dec-2010

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1083	577	<b>1080</b>	<b>579</b>	1078	580	64	875	715	879	712	<b>879</b>	<b>712</b>
401.bzip2	64	<b>1436</b>	<b>430</b>	1434	431	1436	430	64	<b>1321</b>	<b>467</b>	1324	466	1320	468
403.gcc	64	<b>823</b>	<b>626</b>	822	627	826	624	64	<b>821</b>	<b>628</b>	822	627	820	628
429.mcf	64	578	1010	<b>578</b>	<b>1010</b>	579	1010	64	580	1010	581	1000	<b>581</b>	<b>1010</b>
445.gobmk	64	<b>1019</b>	<b>659</b>	1019	659	1022	657	64	963	697	967	694	<b>965</b>	<b>696</b>
456.hammer	64	661	903	657	909	<b>658</b>	<b>907</b>	64	<b>490</b>	<b>1220</b>	490	1220	490	1220
458.sjeng	64	<b>1228</b>	<b>631</b>	1227	631	1231	629	64	1153	671	<b>1158</b>	<b>669</b>	1158	669
462.libquantum	64	380	3490	378	3510	<b>379</b>	<b>3500</b>	64	380	3490	378	3510	<b>379</b>	<b>3500</b>
464.h264ref	64	<b>1551</b>	<b>913</b>	1538	921	1568	903	64	<b>1551</b>	<b>913</b>	1538	921	1568	903
471.omnetpp	64	884	453	883	453	<b>883</b>	<b>453</b>	64	807	496	<b>808</b>	<b>495</b>	808	495
473.astar	64	978	460	984	457	<b>983</b>	<b>457</b>	64	978	460	984	457	<b>983</b>	<b>457</b>
483.xalancbmk	64	<b>593</b>	<b>745</b>	594	743	593	745	64	<b>593</b>	<b>745</b>	594	743	593	745

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

### Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 28800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

### Platform Notes

BIOS configuration:  
Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling

### General Notes

Binaries compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 795**

ProLiant DL580 G7  
(2.13 GHz, Intel Xeon E7-4830)

**SPECint\_rate\_base2006 = 745**

**CPU2006 license:** 3

**Test date:** Jul-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 795**

ProLiant DL580 G7  
(2.13 GHz, Intel Xeon E7-4830)

**SPECint\_rate\_base2006 = 745**

**CPU2006 license:** 3

**Test date:** Jul-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 795**

ProLiant DL580 G7  
(2.13 GHz, Intel Xeon E7-4830)

**SPECint\_rate\_base2006 = 745**

**CPU2006 license:** 3

**Test date:** Jul-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Peak Optimization Flags (Continued)

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 23:46:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 August 2011.