



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5640, 2.66 GHz)

**SPECfp®\_rate2006 = 187**

**SPECfp\_rate\_base2006 = 182**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Aug-2010

Software Availability: Jan-2011

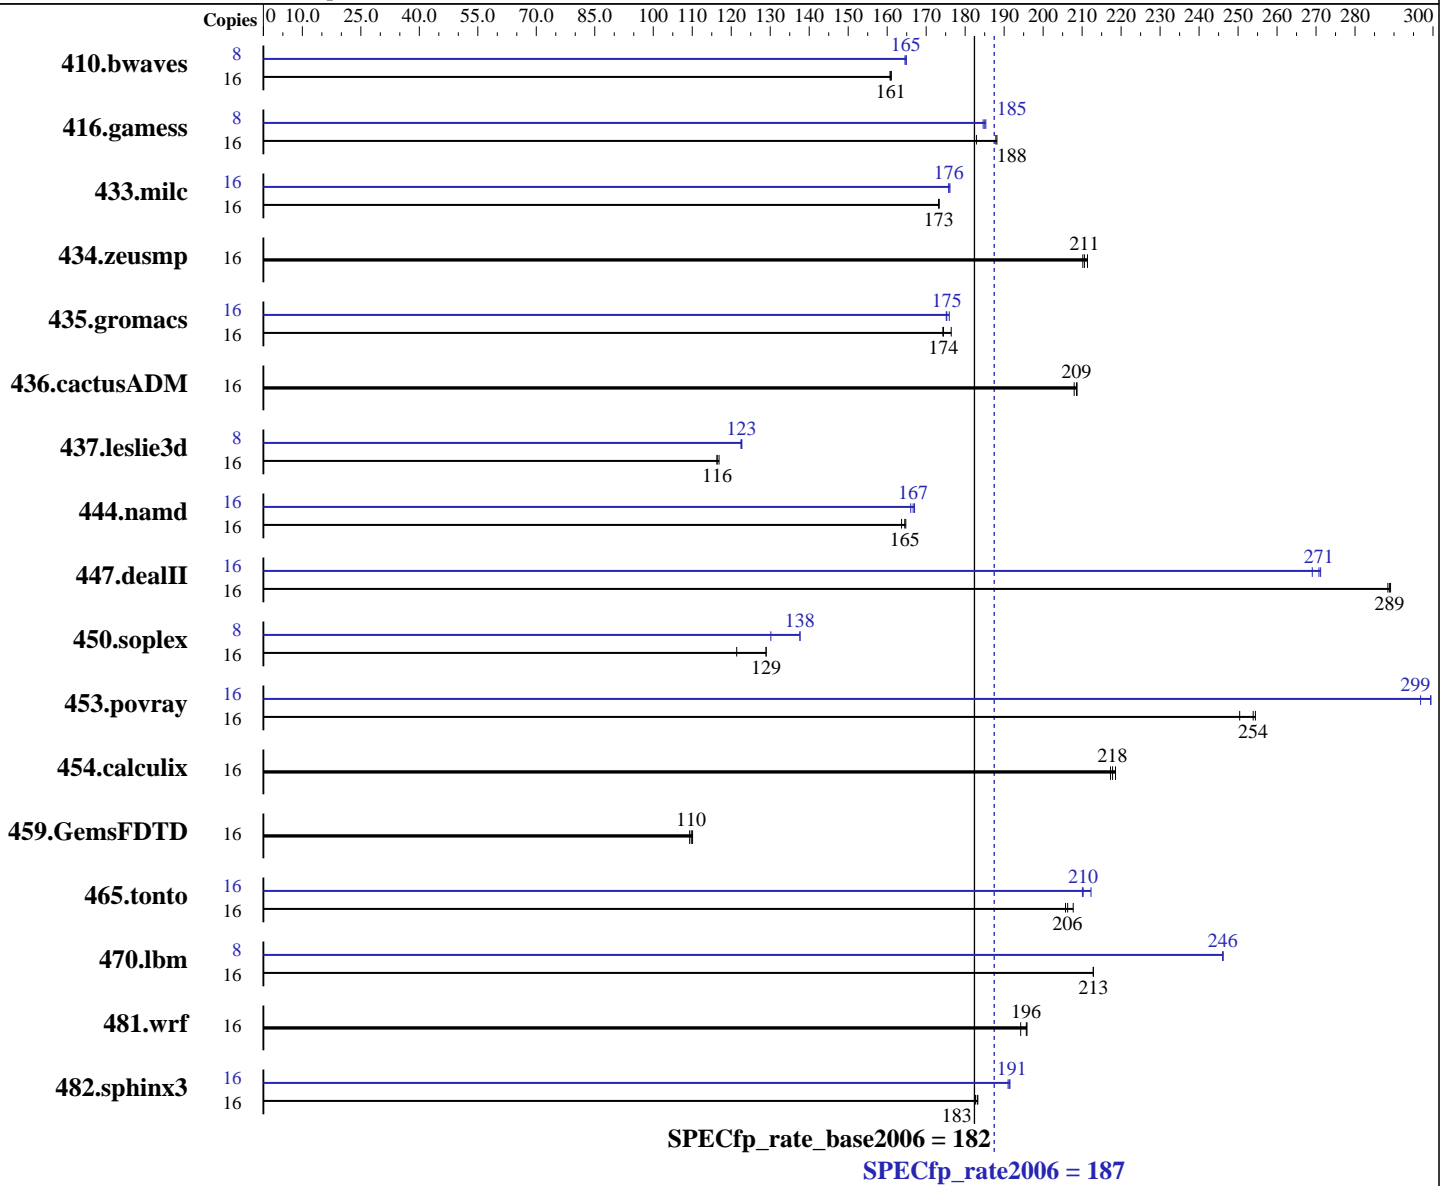

### Hardware

CPU Name: Intel Xeon E5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5640, 2.66 GHz)

SPECfp\_rate2006 = 187

SPECfp\_rate\_base2006 = 182

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jul-2011  
Hardware Availability: Aug-2010  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 1000 GB SATA 7200RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<u>1351</u>	<u>161</u>	1350	161	1353	161	8	659	165	<u>660</u>	<u>165</u>	661	165
416.gamess	16	<u>1668</u>	<u>188</u>	1713	183	1665	188	8	<u>847</u>	<u>185</u>	845	185	848	185
433.milc	16	847	173	848	173	<u>848</u>	<u>173</u>	16	834	176	<u>835</u>	<u>176</u>	836	176
434.zeusmp	16	689	211	<u>691</u>	<u>211</u>	693	210	16	689	211	<u>691</u>	<u>211</u>	693	210
435.gromacs	16	648	176	655	174	<u>655</u>	<u>174</u>	16	649	176	<u>652</u>	<u>175</u>	652	175
436.cactusADM	16	916	209	<u>917</u>	<u>209</u>	919	208	16	916	209	<u>917</u>	<u>209</u>	919	208
437.leslie3d	16	1287	117	<u>1292</u>	<u>116</u>	1293	116	8	614	122	<u>613</u>	<u>123</u>	613	123
444.namd	16	<u>780</u>	<u>165</u>	779	165	784	164	16	773	166	<u>770</u>	<u>167</u>	768	167
447.dealII	16	635	288	633	289	<u>634</u>	<u>289</u>	16	<u>676</u>	<u>271</u>	680	269	675	271
450.soplex	16	1099	121	<u>1035</u>	<u>129</u>	1035	129	8	513	130	<u>485</u>	<u>138</u>	485	138
453.povray	16	340	250	<u>335</u>	<u>254</u>	335	254	16	284	299	<u>284</u>	<u>299</u>	287	297
454.calculix	16	604	219	<u>606</u>	<u>218</u>	607	217	16	604	219	<u>606</u>	<u>218</u>	607	217
459.GemsFDTD	16	1542	110	1553	109	<u>1547</u>	<u>110</u>	16	1542	110	1553	109	<u>1547</u>	<u>110</u>
465.tonto	16	758	208	<u>763</u>	<u>206</u>	765	206	16	<u>749</u>	<u>210</u>	749	210	742	212
470.lbm	16	1032	213	<u>1033</u>	<u>213</u>	1033	213	8	<u>447</u>	<u>246</u>	447	246	447	246
481.wrf	16	912	196	<u>913</u>	<u>196</u>	920	194	16	912	196	<u>913</u>	<u>196</u>	920	194
482.sphinx3	16	1707	183	<u>1703</u>	<u>183</u>	1702	183	16	1633	191	1628	191	<u>1630</u>	<u>191</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5640, 2.66 GHz)

SPECfp\_rate2006 = 187

SPECfp\_rate\_base2006 = 182

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jul-2011  
**Hardware Availability:** Aug-2010  
**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Acer AW2000ht-AW170ht F1 (Intel Xeon E5640, 2.66 GHz)

**SPECfp\_rate2006 = 187**

**SPECfp\_rate\_base2006 = 182**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jul-2011

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.dealII: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5640, 2.66 GHz)

**SPECfp\_rate2006 = 187**

**SPECfp\_rate\_base2006 = 182**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jul-2011

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5640, 2.66 GHz)

SPECfp\_rate2006 = 187

SPECfp\_rate\_base2006 = 182

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Aug-2010

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:19:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 August 2011.