



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint®\_rate2006 = 406

NovaScale T840 F2 (Intel Xeon X5690, 3.46 GHz)

SPECint\_rate\_base2006 = 389

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

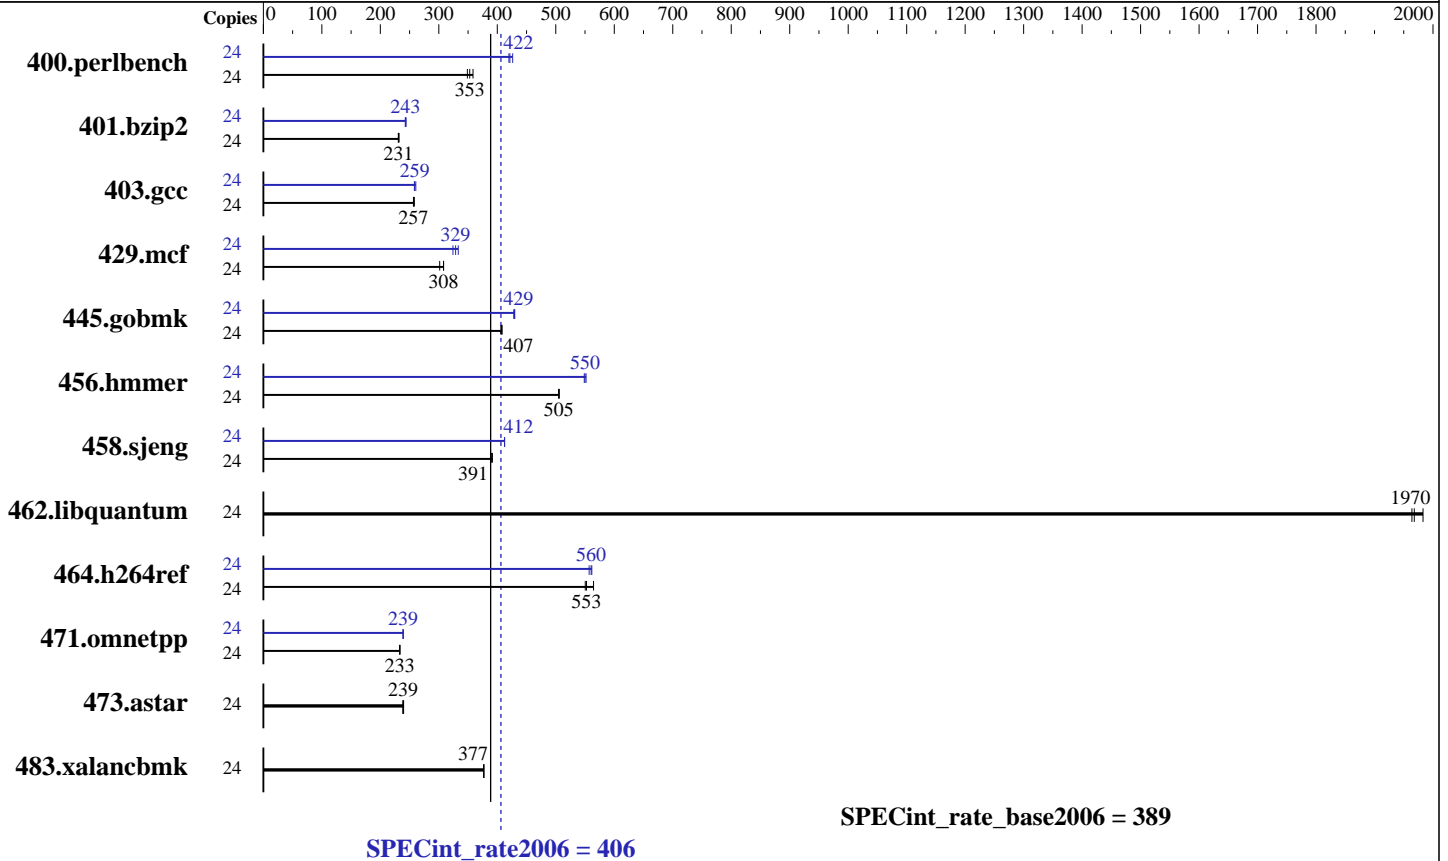

### Hardware

CPU Name: Intel Xeon X5690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
 CPU MHz: 3467  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 406

NovaScale T840 F2 (Intel Xeon X5690, 3.46 GHz)

SPECint\_rate\_base2006 = 389

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Jun-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	672	349	654	358	<b>665</b>	<b>353</b>	24	558	420	<b>556</b>	<b>422</b>	550	426
401.bzip2	24	998	232	<b>1002</b>	<b>231</b>	1004	231	24	949	244	<b>952</b>	<b>243</b>	955	243
403.gcc	24	748	258	<b>752</b>	<b>257</b>	753	257	24	741	261	748	258	<b>747</b>	<b>259</b>
429.mcf	24	726	302	<b>710</b>	<b>308</b>	710	308	24	<b>666</b>	<b>329</b>	657	333	675	324
445.gobmk	24	617	408	620	406	<b>618</b>	<b>407</b>	24	588	428	586	430	<b>586</b>	<b>429</b>
456.hammer	24	444	505	<b>443</b>	<b>505</b>	443	506	24	<b>407</b>	<b>550</b>	408	549	406	552
458.sjeng	24	743	391	<b>743</b>	<b>391</b>	742	391	24	704	412	704	412	<b>704</b>	<b>412</b>
462.libquantum	24	251	1980	<b>253</b>	<b>1970</b>	253	1960	24	251	1980	<b>253</b>	<b>1970</b>	253	1960
464.h264ref	24	941	565	<b>961</b>	<b>553</b>	965	550	24	946	562	953	557	<b>948</b>	<b>560</b>
471.omnetpp	24	643	233	643	233	<b>643</b>	<b>233</b>	24	628	239	<b>627</b>	<b>239</b>	627	239
473.astar	24	703	240	<b>705</b>	<b>239</b>	706	239	24	703	240	<b>705</b>	<b>239</b>	706	239
483.xalancbmk	24	<b>440</b>	<b>377</b>	440	377	439	377	24	<b>440</b>	<b>377</b>	440	377	439	377

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge T610 and the Bull NovaScale T840 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge T610 model. Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 406**

NovaScale T840 F2 (Intel Xeon X5690, 3.46 GHz)

**SPECint\_rate\_base2006 = 389**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Jun-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECint\_rate2006 = 406**

NovaScale T840 F2 (Intel Xeon X5690, 3.46 GHz)

**SPECint\_rate\_base2006 = 389**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Jun-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 406

NovaScale T840 F2 (Intel Xeon X5690, 3.46 GHz)

SPECint\_rate\_base2006 = 389

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:20:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.