



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®_rate2006 = 87.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 965)

SPECint_rate_base2006 = 79.1

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

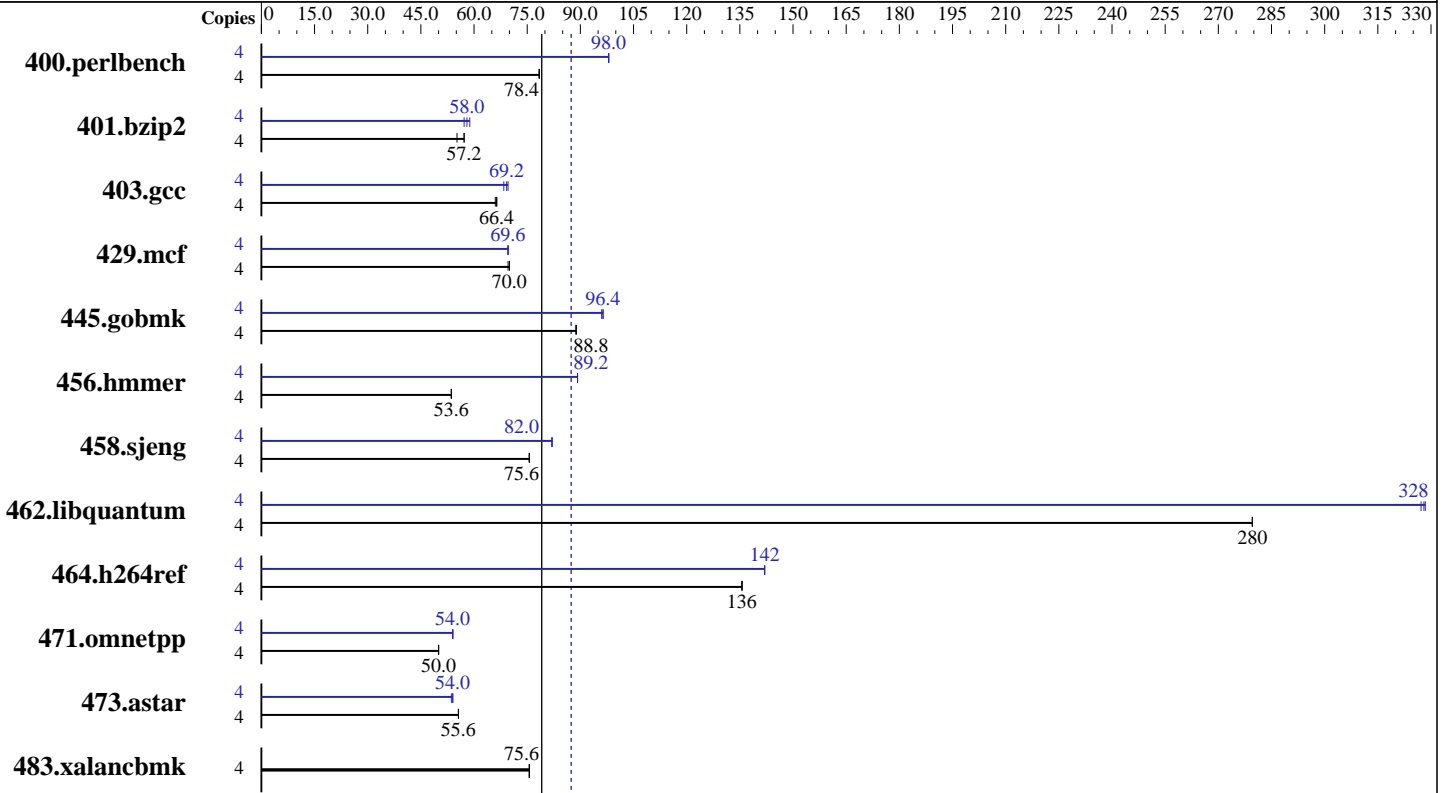

SPECint_rate_base2006 = 79.1

SPECint_rate2006 = 87.4

Hardware

CPU Name: AMD Phenom II X4 965
 CPU Characteristics:
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 2Rx4 PC3-10600U-9)
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 87.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 965)

SPECint_rate_base2006 = 79.1

CPU2006 license: 13

Test date: Jun-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	500	78.4	498	78.4	499	78.4	4	399	98.0	398	98.0	399	98.0
401.bzip2	4	699	55.2	677	57.2	675	57.2	4	673	57.2	667	58.0	657	58.8
403.gcc	4	488	66.0	486	66.4	485	66.4	4	466	69.2	462	69.6	470	68.4
429.mcf	4	524	69.6	523	70.0	522	70.0	4	525	69.6	523	69.6	524	69.6
445.gobmk	4	473	88.8	472	88.8	473	88.8	4	436	96.4	437	96.0	436	96.4
456.hammer	4	698	53.6	699	53.6	698	53.6	4	419	89.2	419	89.2	419	89.2
458.sjeng	4	641	75.6	641	75.6	641	75.6	4	591	82.0	591	82.0	590	82.0
462.libquantum	4	297	280	297	280	296	280	4	253	327	253	328	253	328
464.h264ref	4	653	136	653	136	653	136	4	624	142	624	142	624	142
471.omnetpp	4	500	50.0	500	50.0	500	50.0	4	464	54.0	464	54.0	464	54.0
473.astar	4	505	55.6	505	55.6	505	55.6	4	521	54.0	523	53.6	522	54.0
483.xalancbmk	4	366	75.6	366	75.6	366	75.6	4	366	75.6	366	75.6	366	75.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 87.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 965)

SPECint_rate_base2006 = 79.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
C++ benchmarks:
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icl -Qvc9 -Qstd=c99
456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
-Qstd=c99
C++ benchmarks (except as noted below):
icl -Qvc9
473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
456.hmmr: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 87.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 965)

SPECint_rate_base2006 = 79.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: /arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:SSE3(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 /arch:SSE3(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 /arch:SSE3 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:SSE3 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 87.4

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 965)

SPECint_rate_base2006 = 79.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

456.hmmcr: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.html>
<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.xml>
<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:23:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2011.