



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint®\_rate2006 = 63.4

Intel DH57JG Motherboard (Intel Core i3-530)

SPECint\_rate\_base2006 = 58.0

CPU2006 license: 13


Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

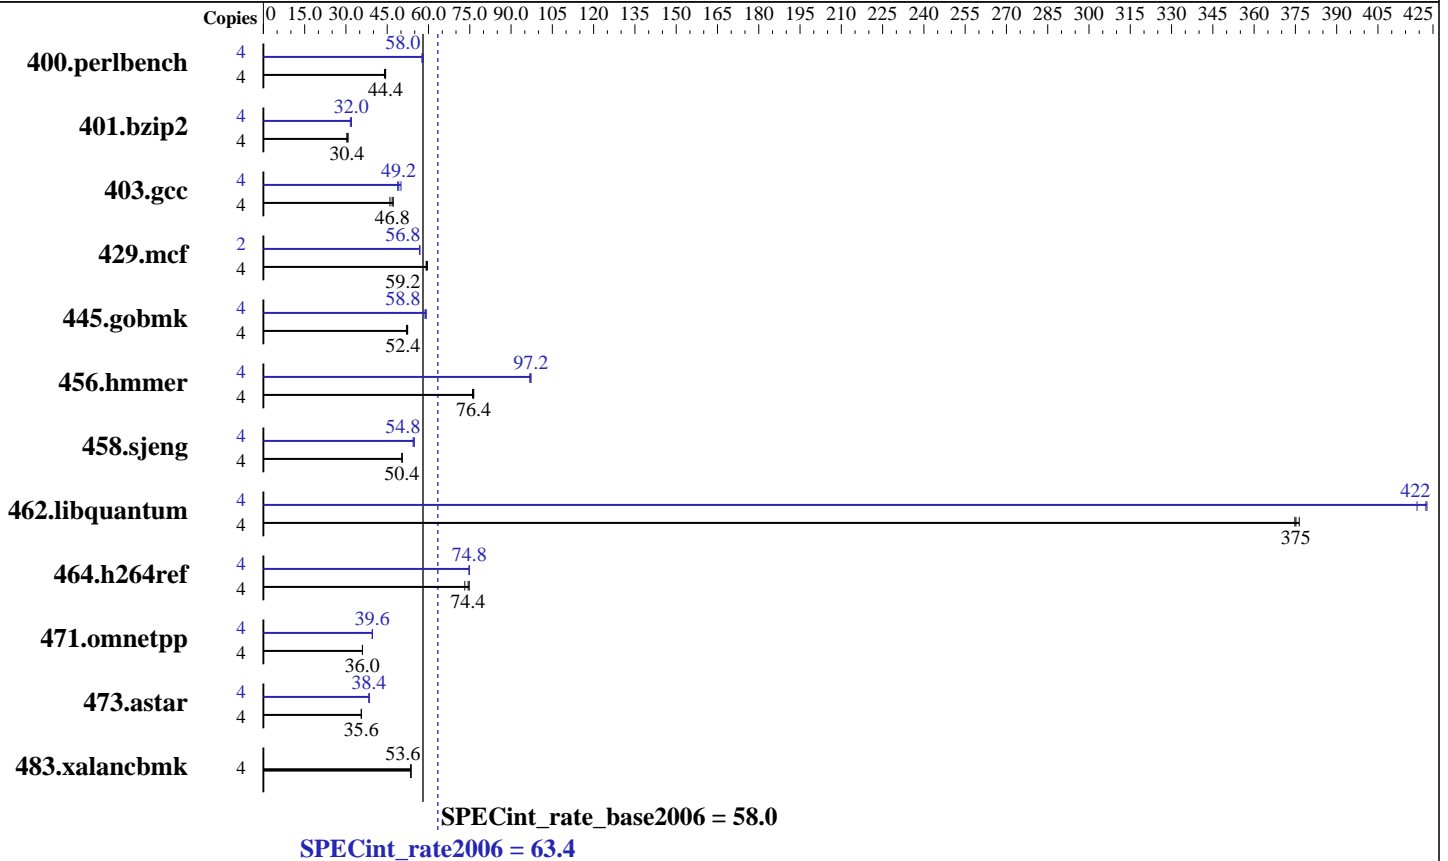

### Hardware

CPU Name: Intel Core i3-530  
 CPU Characteristics:  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)  
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Windows 7 Ultimate (64-bit)  
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309  
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 63.4

Intel DH57JG Motherboard (Intel Core i3-530)

SPECint\_rate\_base2006 = 58.0

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	877	44.4	<b>879</b>	<b>44.4</b>	885	44.0	4	<b>675</b>	<b>58.0</b>	674	58.0	679	57.6
401.bzip2	4	1275	30.4	1254	30.8	<b>1272</b>	<b>30.4</b>	4	1219	31.6	1213	32.0	<b>1214</b>	<b>32.0</b>
403.gcc	4	682	47.2	<b>687</b>	<b>46.8</b>	702	46.0	4	659	48.8	645	50.0	<b>656</b>	<b>49.2</b>
429.mcf	4	<b>616</b>	<b>59.2</b>	611	59.6	617	59.2	2	<b>321</b>	<b>56.8</b>	321	56.8	321	56.8
445.gobmk	4	798	52.4	808	52.0	<b>800</b>	<b>52.4</b>	4	716	58.8	707	59.2	<b>712</b>	<b>58.8</b>
456.hammer	4	491	76.0	489	76.4	<b>489</b>	<b>76.4</b>	4	384	97.2	386	96.8	<b>385</b>	<b>97.2</b>
458.sjeng	4	964	50.4	962	50.4	<b>963</b>	<b>50.4</b>	4	885	54.8	<b>886</b>	<b>54.8</b>	887	54.4
462.libquantum	4	<b>221</b>	<b>375</b>	221	375	220	376	4	198	419	<b>196</b>	<b>422</b>	196	423
464.h264ref	4	1211	73.2	<b>1192</b>	<b>74.4</b>	1185	74.8	4	1185	74.8	1183	74.8	<b>1184</b>	<b>74.8</b>
471.omnetpp	4	694	36.0	<b>694</b>	<b>36.0</b>	694	36.0	4	632	39.6	<b>632</b>	<b>39.6</b>	633	39.6
473.astar	4	786	35.6	<b>786</b>	<b>35.6</b>	786	35.6	4	<b>731</b>	<b>38.4</b>	731	38.4	730	38.4
483.xalancbmk	4	514	53.6	514	53.6	<b>514</b>	<b>53.6</b>	4	514	53.6	514	53.6	<b>514</b>	<b>53.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

## General Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

## Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 63.4

Intel DH57JG Motherboard (Intel Core i3-530)

SPECint\_rate\_base2006 = 58.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Jan-2010

Software Availability: Apr-2011

## Base Optimization Flags

C benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

C++ benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icl -Qvc9 -Qstd=c99`

`456.hmmer: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe  
-Qstd=c99`

C++ benchmarks (except as noted below):

`icl -Qvc9`

`473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

## Peak Portability Flags

`403.gcc: -DSPEC_CPU_WIN32`

`456.hmmer: -DSPEC_CPU_P64`

`458.sjeng: -DSPEC_CPU_P64`

`462.libquantum: -DSPEC_CPU_P64`

`464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES`

`473.astar: -DSPEC_CPU_P64`

`483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 63.4

Intel DH57JG Motherboard (Intel Core i3-530)

SPECint\_rate\_base2006 = 58.0

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4  
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000 shlW64M.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 63.4

Intel DH57JG Motherboard (Intel Core i3-530)

SPECint\_rate\_base2006 = 58.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Jan-2010

Software Availability: Apr-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

456.hmmcr: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:09:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 August 2011.