



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated


Acer AW2000ht-AW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECint®\_rate2006 = 171**

**SPECint\_rate\_base2006 = 161**

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

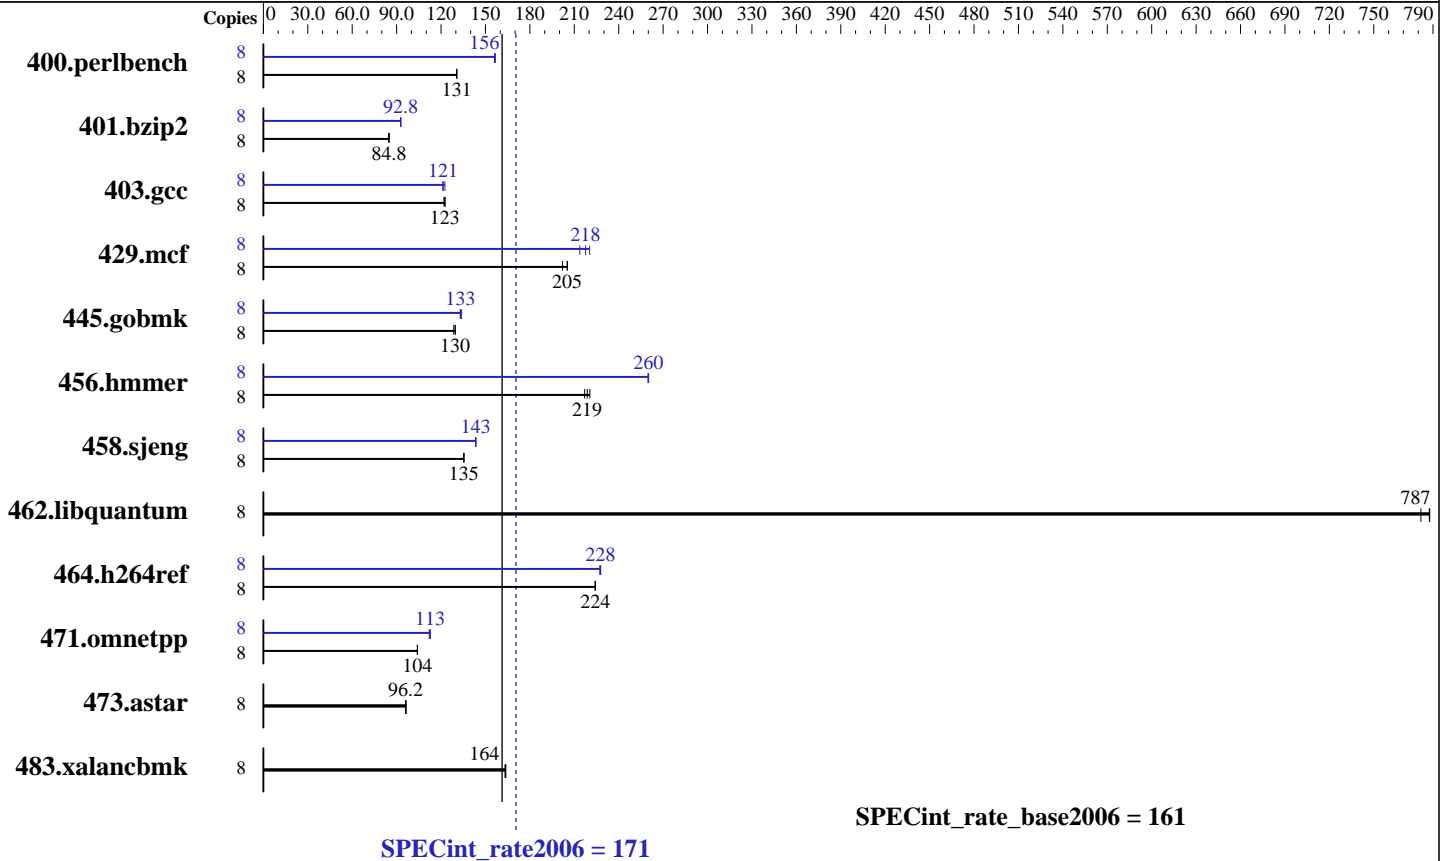

### Hardware

CPU Name: Intel Xeon E5607  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 1000 GB SATA 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5607, 2.26 GHz)

SPECint\_rate2006 = 171

SPECint\_rate\_base2006 = 161

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	599	131	<u>599</u>	<u>131</u>	598	131	8	<u>499</u>	<u>156</u>	501	156	499	157
401.bzip2	8	<u>911</u>	<u>84.8</u>	908	85.0	912	84.6	8	832	92.8	833	92.7	<u>832</u>	<u>92.8</u>
403.gcc	8	525	123	528	122	<u>525</u>	<u>123</u>	8	525	123	<u>530</u>	<u>121</u>	531	121
429.mcf	8	361	202	355	205	<u>356</u>	<u>205</u>	8	<u>335</u>	<u>218</u>	341	214	331	220
445.gobmk	8	653	129	647	130	<u>648</u>	<u>130</u>	8	627	134	631	133	<u>630</u>	<u>133</u>
456.hammer	8	338	221	344	217	<u>341</u>	<u>219</u>	8	<u>287</u>	<u>260</u>	287	260	287	260
458.sjeng	8	715	135	<u>715</u>	<u>135</u>	715	135	8	674	144	<u>675</u>	<u>143</u>	675	143
462.libquantum	8	210	788	212	782	<u>210</u>	<u>787</u>	8	210	788	212	782	<u>210</u>	<u>787</u>
464.h264ref	8	790	224	<u>790</u>	<u>224</u>	789	224	8	<u>778</u>	<u>228</u>	777	228	779	227
471.omnetpp	8	<u>481</u>	<u>104</u>	481	104	481	104	8	444	113	446	112	<u>444</u>	<u>113</u>
473.astar	8	585	96.0	582	96.4	<u>584</u>	<u>96.2</u>	8	585	96.0	582	96.4	<u>584</u>	<u>96.2</u>
483.xalancbmk	8	337	164	<u>337</u>	<u>164</u>	338	163	8	337	164	<u>337</u>	<u>164</u>	338	163

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

Binaries compiled on RHEL5.5  
None  
The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECint\_rate2006 = 171**

Acer AW2000ht-AW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECint\_rate\_base2006 = 161**

**CPU2006 license:** 97

**Test date:** Jul-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Feb-2011

**Tested by:** Acer Incorporated

**Software Availability:** Jan-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECint\_rate2006 = 171**

Acer AW2000ht-AW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECint\_rate\_base2006 = 161**

**CPU2006 license:** 97

**Test date:** Jul-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Feb-2011

**Tested by:** Acer Incorporated

**Software Availability:** Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECint\_rate2006 = 171**

Acer AW2000ht-AW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECint\_rate\_base2006 = 161**

**CPU2006 license:** 97

**Test date:** Jul-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Feb-2011

**Tested by:** Acer Incorporated

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:41:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 August 2011.