



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2005-TY3 (Intel Xeon X5687, 3.60 GHz)

SPECfp[®]_rate2006 = 236

SPECfp_rate_base2006 = 230

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Aug-2011

Hardware Availability: Feb-2011

Software Availability: Sep-2011

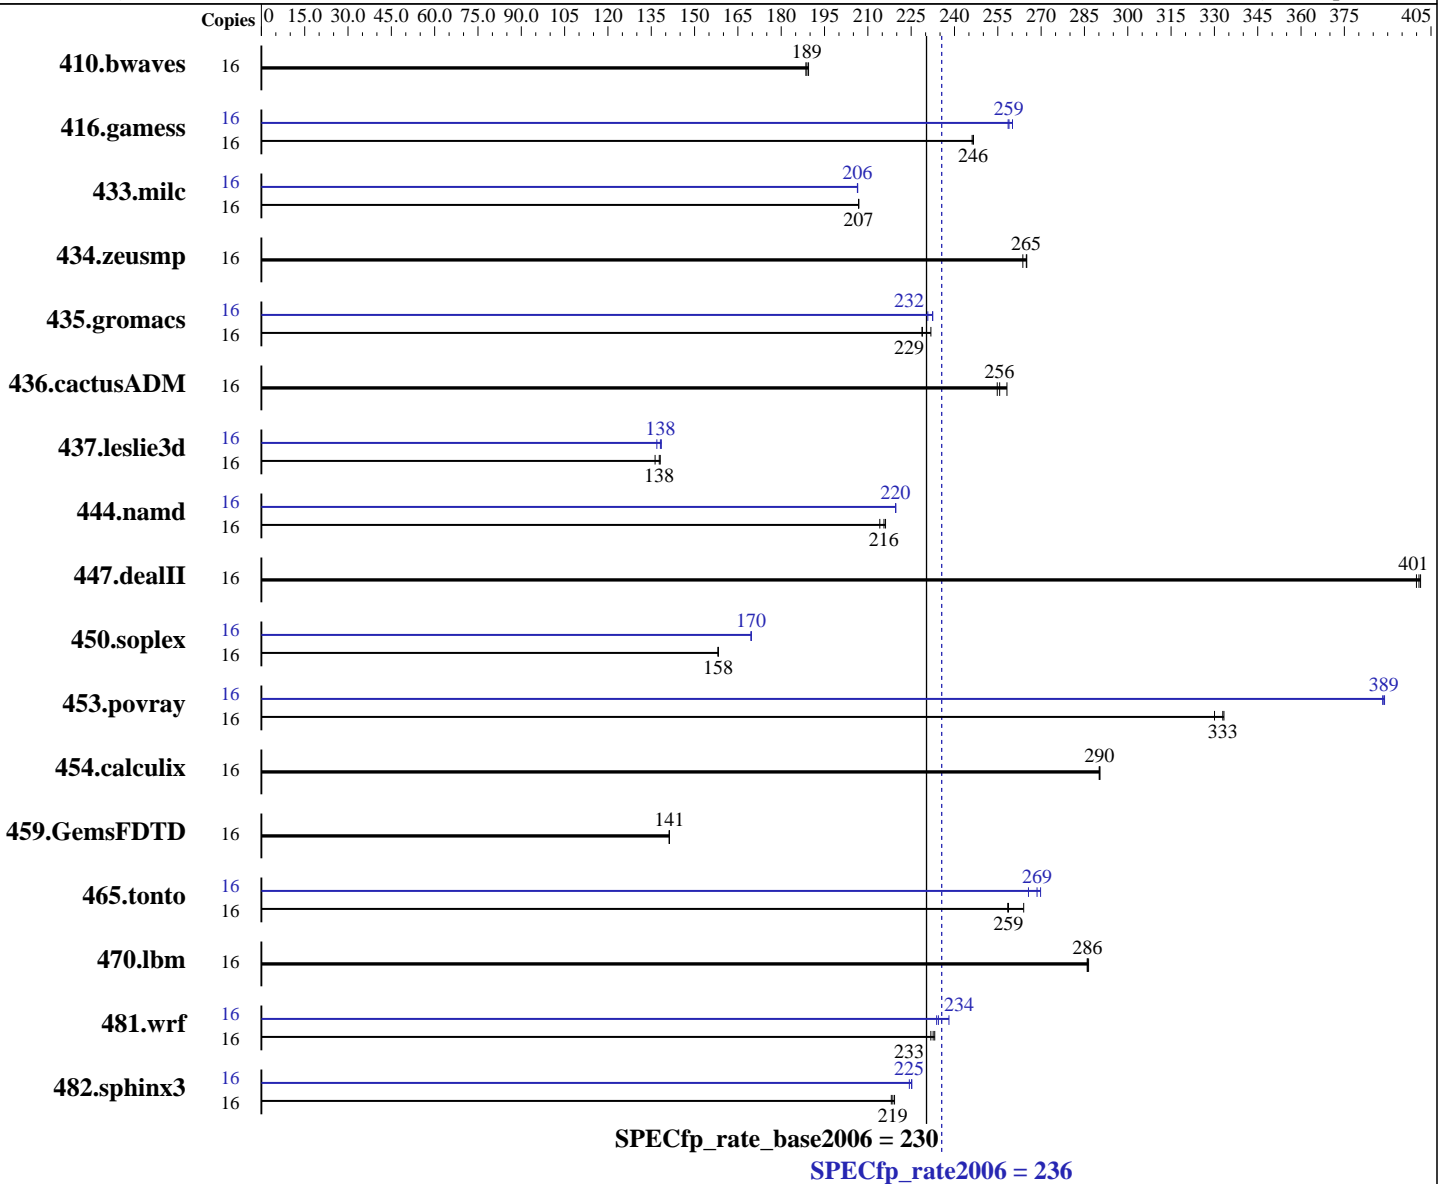

Hardware

CPU Name: Intel Xeon X5687
 CPU Characteristics: Intel Turbo Boost Technology up to 3.86 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, kernel 2.6.32.36-0.5-default
 Compiler: Intel C++ and Fortran Compiler XE for applications running on IA32 and Intel 64 12.1.0.225 Build 20110803
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2005-TY3 (Intel Xeon X5687, 3.60 GHz)

SPECfp_rate2006 = 236

SPECfp_rate_base2006 = 230

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Aug-2011
Hardware Availability: Feb-2011
Software Availability: Sep-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 876 GB RAID 5
6 x 146 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1148	189	<u>1151</u>	<u>189</u>	1153	189	16	1148	189	<u>1151</u>	<u>189</u>	1153	189		
416.gamess	16	1271	247	<u>1271</u>	<u>246</u>	1273	246	16	1205	260	<u>1210</u>	<u>259</u>	1212	259		
433.milc	16	710	207	710	207	<u>710</u>	<u>207</u>	16	<u>712</u>	<u>206</u>	711	206	712	206		
434.zeusmp	16	549	265	<u>550</u>	<u>265</u>	552	264	16	549	265	<u>550</u>	<u>265</u>	552	264		
435.gromacs	16	499	229	493	232	<u>499</u>	<u>229</u>	16	491	232	495	231	<u>492</u>	<u>232</u>		
436.cactusADM	16	750	255	<u>748</u>	<u>256</u>	741	258	16	750	255	<u>748</u>	<u>256</u>	741	258		
437.leslie3d	16	<u>1092</u>	<u>138</u>	1103	136	1089	138	16	1098	137	<u>1088</u>	<u>138</u>	1086	138		
444.namd	16	<u>595</u>	<u>216</u>	599	214	594	216	16	584	220	<u>584</u>	<u>220</u>	584	220		
447.dealII	16	<u>457</u>	<u>401</u>	458	400	456	401	16	<u>457</u>	<u>401</u>	458	400	456	401		
450.soplex	16	843	158	<u>844</u>	<u>158</u>	844	158	16	787	170	<u>787</u>	<u>170</u>	787	170		
453.povray	16	<u>256</u>	<u>333</u>	258	330	255	333	16	219	388	<u>219</u>	<u>389</u>	219	389		
454.calculix	16	455	290	<u>455</u>	<u>290</u>	455	290	16	455	290	<u>455</u>	<u>290</u>	455	290		
459.GemsFDTD	16	1202	141	<u>1202</u>	<u>141</u>	1202	141	16	1202	141	<u>1202</u>	<u>141</u>	1202	141		
465.tonto	16	<u>609</u>	<u>259</u>	609	258	596	264	16	<u>586</u>	<u>269</u>	584	270	593	266		
470.lbm	16	768	286	<u>769</u>	<u>286</u>	769	286	16	768	286	<u>769</u>	<u>286</u>	769	286		
481.wrf	16	766	233	<u>768</u>	<u>233</u>	771	232	16	764	234	751	238	<u>762</u>	<u>234</u>		
482.sphinx3	16	1430	218	1422	219	<u>1426</u>	<u>219</u>	16	<u>1385</u>	<u>225</u>	1385	225	1390	224		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = /scratch/cma/cpu2006-1.1/smartheap:/scratch/cma/cpu2006-1.1/ic12.1-libs/ia32:/scratch/cma/cpu2006-1.1/ic12.1-libs/intel64*

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5 with binutils-2.17.50.0.6-14.el5
Stack size set to unlimited using "ulimit -s unlimited"
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2005-TY3 (Intel Xeon X5687, 3.60 GHz)

SPECfp_rate2006 = 236

SPECfp_rate_base2006 = 230

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Aug-2011
Hardware Availability: Feb-2011
Software Availability: Sep-2011

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2005-TY3 (Intel Xeon X5687, 3.60 GHz)

SPECfp_rate2006 = 236

SPECfp_rate_base2006 = 230

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Aug-2011

Hardware Availability: Feb-2011

Software Availability: Sep-2011

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2005-TY3 (Intel Xeon X5687, 3.60 GHz)

SPECfp_rate2006 = 236

SPECfp_rate_base2006 = 230

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Aug-2011

Hardware Availability: Feb-2011

Software Availability: Sep-2011

Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2005-TY3 (Intel Xeon X5687, 3.60 GHz)

SPECfp_rate2006 = 236

SPECfp_rate_base2006 = 230

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Aug-2011

Hardware Availability: Feb-2011

Software Availability: Sep-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:36:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 September 2011.