



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint[®]_rate2006 = 419

Servidor Itaotec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 391

CPU2006 license: 9001


Test date: Aug-2011

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Jan-2011

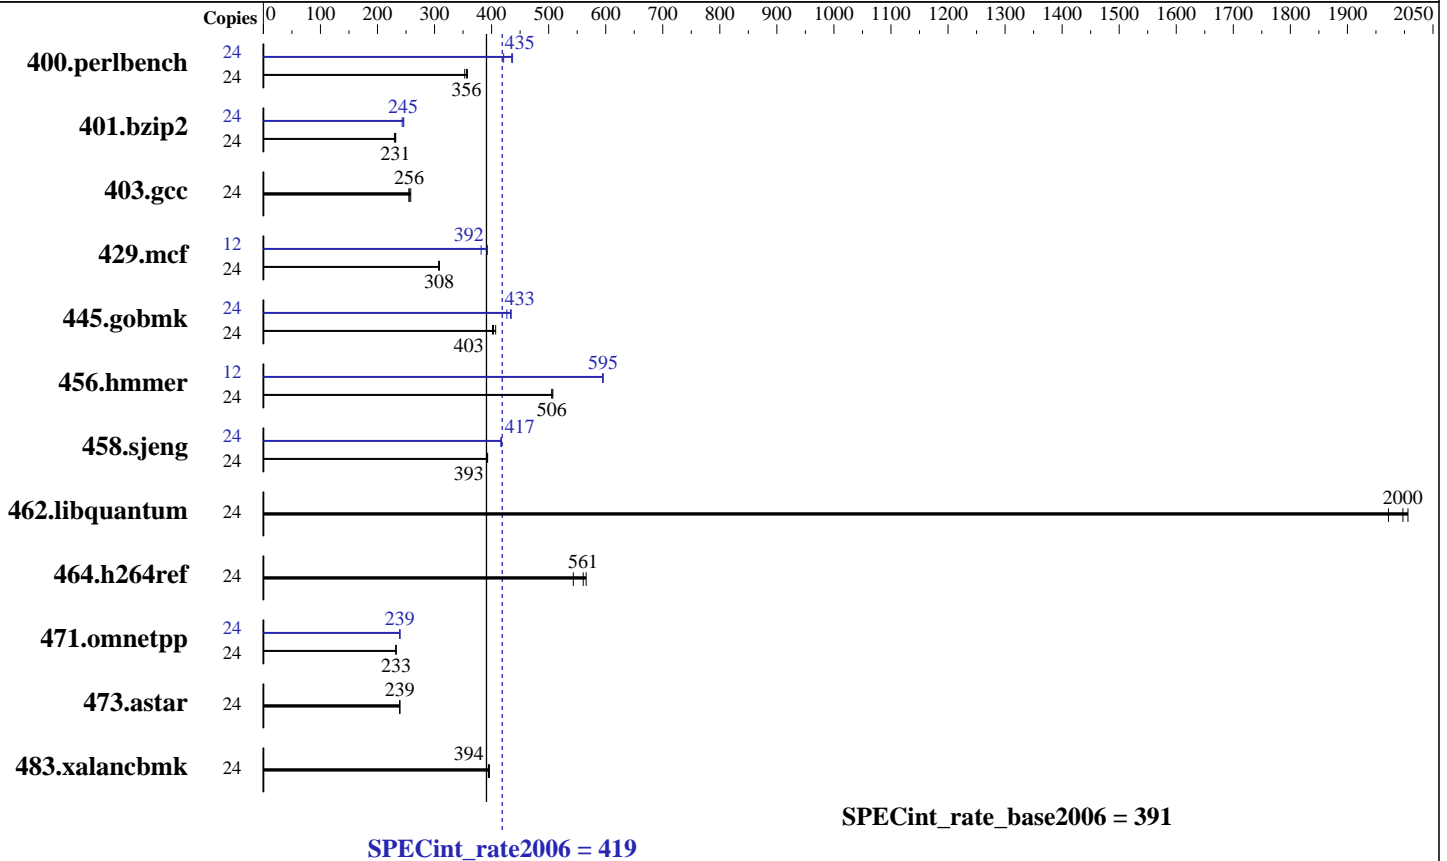

Hardware

CPU Name: Intel Xeon X5690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3467
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.2 Build 20110112
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 419

Servidor Itaotec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 391

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	665	353	658	356	656	358	24	557	421	539	435	537	437
401.bzip2	24	1001	231	1009	230	998	232	24	945	245	952	243	941	246
403.gcc	24	748	258	756	256	757	255	24	748	258	756	256	757	255
429.mcf	24	713	307	710	308	710	308	12	279	393	287	382	279	392
445.gobmk	24	618	407	624	403	627	402	24	580	434	581	433	590	427
456.hammer	24	443	506	443	506	441	507	12	188	595	188	595	188	595
458.sjeng	24	739	393	740	393	741	392	24	697	417	696	417	697	416
462.libquantum	24	248	2010	249	2000	252	1970	24	248	2010	249	2000	252	1970
464.h264ref	24	939	566	947	561	978	543	24	939	566	947	561	978	543
471.omnetpp	24	646	232	645	233	645	233	24	627	239	627	239	628	239
473.astar	24	705	239	704	239	705	239	24	705	239	704	239	705	239
483.xalancbmk	24	418	396	420	394	420	394	24	418	396	420	394	420	394

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 419

Servidor Itautec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 391

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Aug-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 419

Servidor Itautec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 391

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Aug-2011
Hardware Availability: Jul-2011
Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 419

Servidor Itautec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 391

CPU2006 license: 9001

Test date: Aug-2011

Test sponsor: Itautec

Hardware Availability: Jul-2011

Tested by: Itautec

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:37:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 September 2011.